Photointerrupter, Small type



Absolute maximum ratings (Ta=25°C)

	Parameter	Symbol	Limits	Unit
ED)	Forward current	lf	50	mA
Input (LED)	Reverse voltage	VR	5	V
	Power dissipation	PD	80	mW
	Collector-emitter voltage	Vceo	30	V
ut o- sisto	Emitter-collector voltage	Veco	4.5	V
Output (photo- (transistor)	Collector current	lc	30	mA
	Collector power dissipation	Pc	80	mW
Operating temperature		Topr	-25 to +85	°C
	Storage temperature	Tstg	-30 to +85	°C



Printers

Features

- 1) Compact with a 4mm gap.
- 2) High precision position detection (slit width of 0.5mm).
- Minimal influence from stray light.
 Low collector-emitter voltage.

Electrical and optical characteristics (Ta=25°C)

	Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions	
tics	Forward voltage	VF	-	1.3	1.6	V	I==50mA	
Input charac- teristics	Reverse current	IR	-	-	10	μΑ	Vr=5V	
Output charac- teristics	Dark current	Iceo	-	-	0.5	μΑ	Vce=10V	
	Peak sensitivity wavelength	λp	-	800	-	nm	_	
Transfer charac- teristics	Collector current	lc	0.2	0.55	-	mA	Vce=5V, IF=20mA	
	Collector-emitter saturation voltage	Vce(sat)	-	-	0.4	V	IF=20mA, Ic=0.1mA	
	Response time	tr-tf	-	10	-	μs	Vcc=5V, IF=20mA, RL=100Ω	
ter e	Cut-off frequency	fc	-	1	-	– MHz IF=50mA	IF=50mA	
Infrared light emitter diode	Peak light emitting wavelength	λP	-	950	-	nm	* Non-coherent Infrared light emitting diode used.	
Photo transistor	Response time	tr•tf	-	10	-	μs	$V_{CC}{=}5V,~I_{C}{=}1mA,~R_{L}{=}100\Omega$ $*$ This product is not designed to be protected against electromagnetic wave.	
Phot trans	Maximum sensitivity wavelength	λp	-	800	-	nm	_	

Electrical and optical characteristics curves

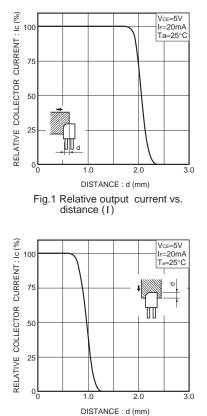


Fig.4 Relative output current vs. distance (II)




Fig.2 Forward current falloff




Fig.5 Power dissipation / collector power dissipation vs. ambient temperature




Fig.3 Forward current vs. forward voltage


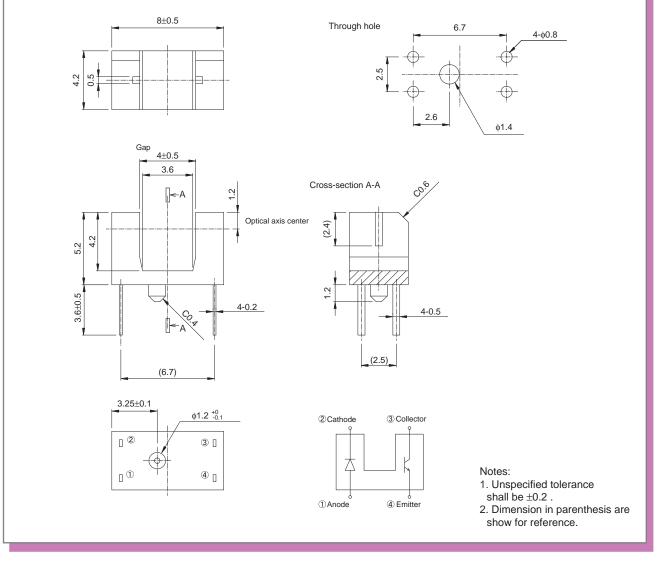




Fig.6 Relative output vs. ambient temperature












Fig.8 Response time vs. collector current



tr: Rise time (time for output current to rise from 10% to 90% of peak current) tr: Fall time (time for output current to fall from 90% to 10% of peak current)



	Notes
	or reproduction of this document, in part or in whole, is permitted without the OHM Co.,Ltd.
The content	specified herein is subject to change for improvement without notice.
"Products").	specified herein is for the purpose of introducing ROHM's products (hereinafte If you wish to use any such Product, please be sure to refer to the specifications e obtained from ROHM upon request.
illustrate the	application circuits, circuit constants and any other information contained hereir standard usage and operations of the Products. The peripheral conditions mus account when designing circuits for mass production.
However, sh	vas taken in ensuring the accuracy of the information specified in this document ould you incur any damage arising from any inaccuracy or misprint of such ROHM shall bear no responsibility for such damage.
examples of implicitly, any other parties	I information specified herein is intended only to show the typical functions of and application circuits for the Products. ROHM does not grant you, explicitly of y license to use or exercise intellectual property or other rights held by ROHM and B. ROHM shall bear no responsibility whatsoever for any dispute arising from the rechnical information.
equipment o	s specified in this document are intended to be used with general-use electronic r devices (such as audio visual equipment, office-automation equipment, commu- ces, electronic appliances and amusement devices).
The Products	s specified in this document are not designed to be radiation tolerant.
	1 always makes efforts to enhance the quality and reliability of its Products, a fail or malfunction for a variety of reasons.
against the p failure of any shall bear no	The to implement in your equipment using the Products safety measures to guard cossibility of physical injury, fire or any other damage caused in the event of the Product, such as derating, redundancy, fire control and fail-safe designs. ROHM presponsibility whatsoever for your use of any Product outside of the prescribed in accordance with the instruction manual.
system whic may result in instrument, t controller or of the Produ	s are not designed or manufactured to be used with any equipment, device on h requires an extremely high level of reliability the failure or malfunction of which a direct threat to human life or create a risk of human injury (such as a medica ransportation equipment, aerospace machinery, nuclear-reactor controller, fuel- other safety device). ROHM shall bear no responsibility in any way for use of any locts for the above special purposes. If a Product is intended to be used for any purpose, please contact a ROHM sales representative before purchasing.
be controlled	to export or ship overseas any Product or technology specified herein that may d under the Foreign Exchange and the Foreign Trade Law, you will be required to use or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ROHM Semiconductor: <u>RPI-441C1</u>