

TM4C Microcontrollers



TM4C123x Microcontrollers

Introduction

The **TM4C123x MCUs** provide a broad portfolio of connected Cortex®-M4 microcontrollers. Designers who migrate to the TM4C123x MCUs benefit from a balance between the floating-point performance needed to create highly responsive mixed-signal applications and the low-power architecture required to enable increasingly aggressive power budgets. TM4C123x MCUs are supported by TivaWare™ for C Series software, designed specifically for those customers who want to get started easily, write production-ready code quickly, and minimize their overall cost of software ownership.

Key highlights


- ARM Cortex-M4 core with floating point
- CPU speed up to 80 MHz
- Up to 256-KB Flash
- Up to 32-KB single-cycle SRAM and 2-KB EEPROM
- Two high-speed 12-bit ADCs up to 1 MSPS
- Up to two CAN 2.0 A/B controllers
- Optional full-speed USB 2.0 OTG/Host/Device
- Up to 40 PWM outputs
- Serial communication with up to:
 - 8 UARTs, 6 I²Cs, 4 SPI/SSI
- Intelligent low-power design power consumption as low as 1.6 µA

Benefits

- 12-bit ADC accuracy achievable at the full 1 MSPS rating without any hardware averaging, eliminating performance tradeoffs
- First ARM Cortex-M MCU in advanced 65-nm process technology provides the right balance between higher performance and low power consumption
- ARM Cortex-M4 with floating point accelerates math-intensive operations and simplifies digital signal processing implementations
- Range of pin-compatible memory and package configurations enables optimal selection of devices

Applications

- Connectivity
- Sensor aggregation
- Security and access control
- Home and building automation
- Industrial automation
- Human machine interface
- Lighting control
- Energy
- Data acquisition
- System management

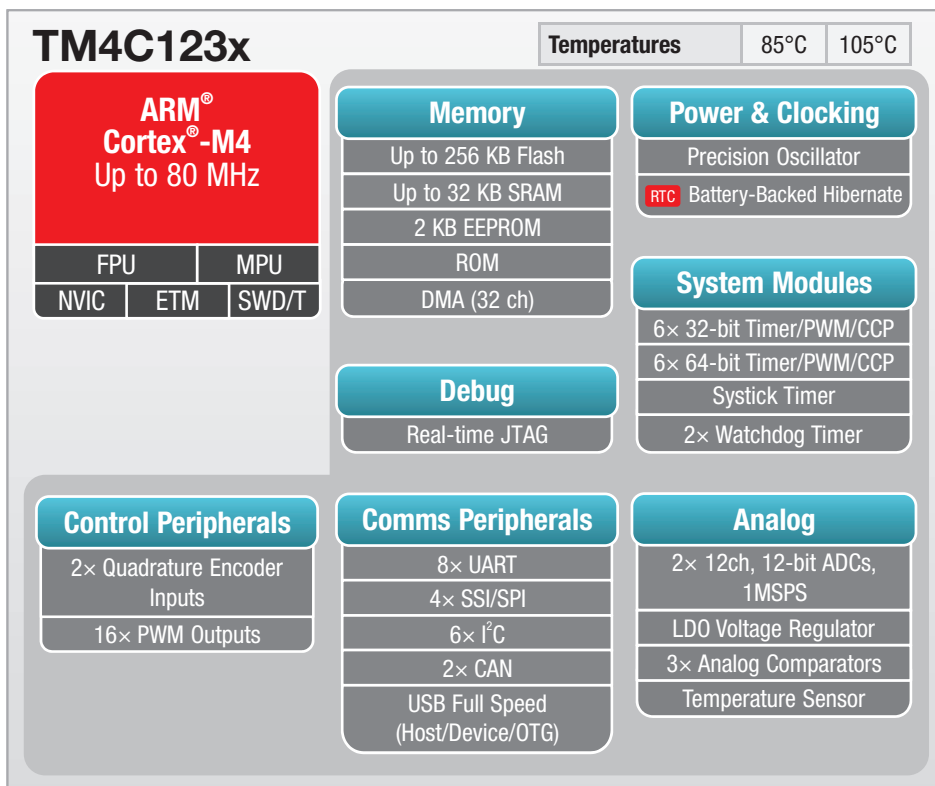

TM4C129x Microcontrollers

Introduction

The **TM4C129x** product line will allow designers to develop a new class of highly connected products using the first ARM® Cortex®-M4 MCU with integrated Ethernet MAC+PHY, along with on-chip communication peripherals. Engineers will have the ability to enhance product features and communicate to industrial and HMI applications with integrated data protection, robust memory and LCD controller. They can further control and differentiate products with TivaWare™, including 50+ software application examples, along with TI's strong development ecosystem.

Key highlights


- ARM Cortex-M4 core with floating point
- CPU speed up to 120 MHz
- Up to 1-MB Flash
- 256-KB SRAM and 6-KB EEPROM
- 10/100 Ethernet with embedded MAC and PHY
- LCD controller
- AES, DES, SHA/MD5 and CRC hardware acceleration
- Four tamper inputs
- Two 12-bit ADCs up to 2 MSPS
- Two CAN 2.0 A/B controllers
- Full-speed USB 2.0 OTG/Host/Device and high-speed USB ULPI interface
- Serial communication with up to:
 - 8 UARTs, 10 I²Cs, 4 QSPI/SSI, 1-Wire master interface

Benefits

- Connect to and communicate with products and services with 10/100 Ethernet MAC+PHY with advanced line diagnostics. Integrated CAN and USB provide high-speed connectivity, allowing the creation of seamless gateway solutions.
- Control outputs and manage multiple events with 10 I²C ports, dual 12-bit ADCs, three on-chip comparators, and the external peripheral interface
- Address varying application memory needs with pin-for-pin compatibility across the TM4C129x portfolio. With 256 KB of integrated SRAM and 6-KB EEPROM along with a scalable 512 KB to 1 MB Flash memory with 100,000 program cycle endurance for extended in-field updates and reliable operation.
- Save board space and design smaller products with integrated Ethernet MAC+PHY, USB and LCD controller.
- Add data protection to applications and reduce processing overhead with the hardware acceleration of key encryption/decryption


Applications

- Solar inverters
- Industrial sensors
- Industrial automation
- Security access systems
- Industrial motor control
- Communications adapters/concentrators
- Networked industrial meters/controllers
- Industrial HMI control panels/displays
- Networked residential/SoHo systems
- Vending machines

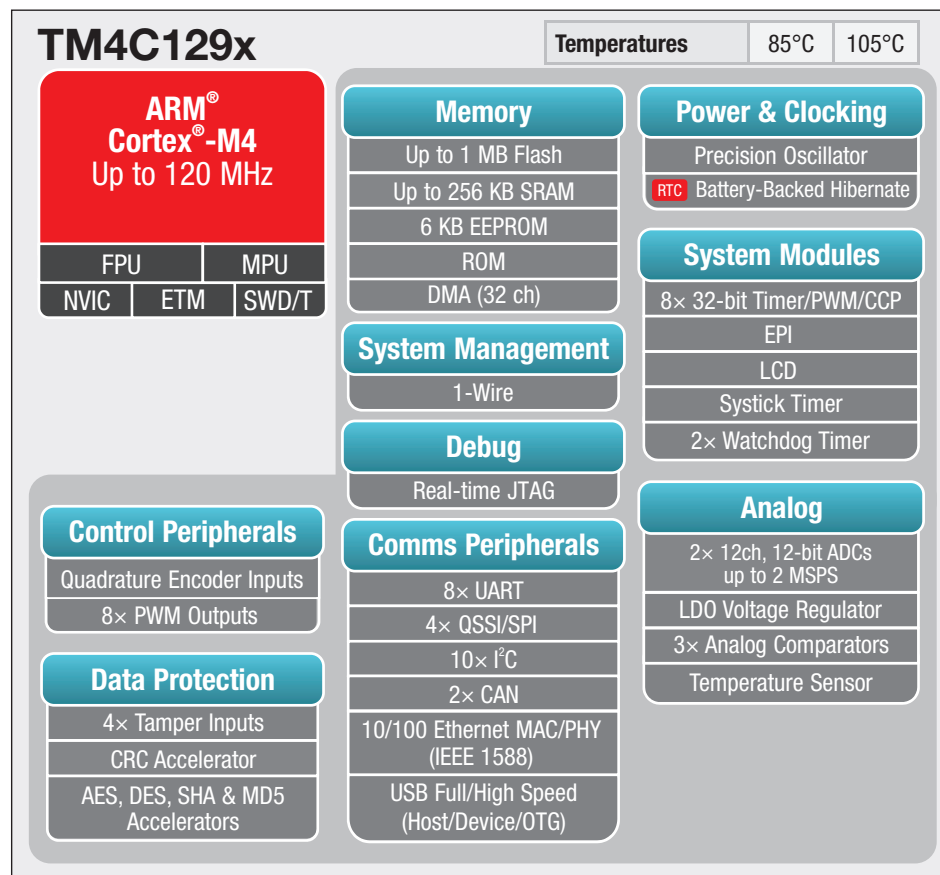

TM4C Kits

Evaluation kits




EK-TM4C123GXL LaunchPad is the perfect kit to get started with a TM4C microcontroller (MCU) at just \$12.99.

EK-TM4C1294XL Connected

LaunchPad is the industry's lowest-priced Cortex®-M4 evaluation kit with one-of-a-kind out-of-the-box connectivity options, starting at \$19.99.

www.ti.com/launchpad





Development kits

TM4C123G Development Kit is a compact and versatile evaluation platform for the TM4C123G ARM® Cortex-M4-based microcontroller (MCU). The development kit design highlights the TM4C123G MCU integrated USB 2.0 On-the-Go/Host/Device interface, CAN, precision analog, sensor hub, and low-power capabilities. The development kit features a TM4C123GH6PGE microcontroller in a 144-LQFP package, a color OLED display, USB OTG connector, a microSD card slot, a coin-cell battery for the low-power

Hibernate mode, a CAN transceiver, a temperature sensor, a nine-axis sensor for motion tracking and easy-access through-holes to all of the available device signals.


TM4C129x Connected

Development Kit (DK-TM4C129X) is a versatile and feature-rich engineering platform highlighting the 120-MHz TM4C129XNCZAD ARM Cortex-M4-based microcontroller that includes an integrated 10/100 Ethernet MAC+PHY plus many other key features. Beyond the industry-leading Ethernet integration, this kit and its associated MCU, the TM4C129XNCZADI, also showcase integrated functions such as a color LCD interface, USB 2.0 OTG/Host/Device port, TI wireless EM connection, BoosterPack and BoosterPack XL interfaces, a Quad SSI-supported 512-Mbit Flash memory, microSD slot, plus expansion headers providing easy access for interfacing to the MCU's high-speed USB ULPI port, Ethernet RMII/MII ports, and its external peripheral interface, which supports memories, parallel peripherals and other system functions.

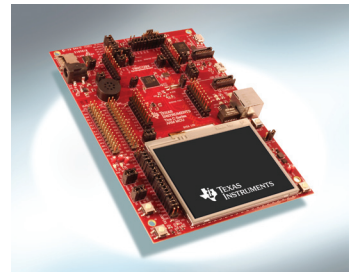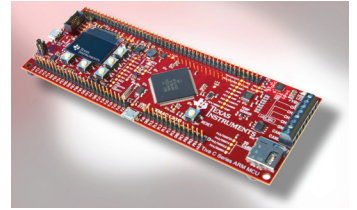


BoosterPacks

Sensor Hub BoosterPack. Unlock a world of possibilities with TI's new Sensor Hub BoosterPack featuring 9-axis MEMS motion sensors, pressure sensor, ambient light sensor and IR temperature sensor.

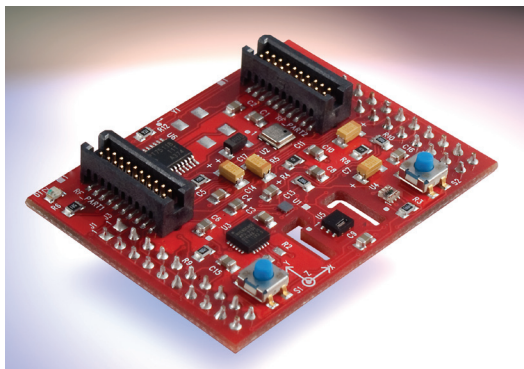

Plug-in BoosterPacks for the TM4C123x LaunchPad and TM4C129x Connected Development Kit make it simple and fun to explore various applications by expanding the functionality of the TM4C MCUs.

www.ti.com/boosterpack



TM4C Product Selector

TM4C123x/TM4C129x Microcontrollers


Part Number	Memory			Core	External I/Fs	Serial Interfaces										Timers				Analog			Data Protection				Low Pwr	Temperature Range (°C)	Pin/Package						
	Flash (KB)	SRAM (KB)	EEPROM (Bytes)			ARM® Cortex® CPU	Max Speed (MHz)	External Peripheral I/F	LCD Controller Module	Ethernet			CAN MAC	USB		UART	SSI/ SPI	General-Purpose (Total)	Real-Time Clock (RTC)	Watchdog	PWM Outputs	QEI Channels	Resolution (bits)	Channels	Speed (samples/sec)	Analog/Digital Comparators				Tamper Signals	CRC	AES	DES	SHA/MD5	Battery-Backed Hibernation
										10/100 MAC+PHY	10/100 MAC with MII I/F	IEEE 1588		HS USB PHY I/F (ULPI)																					
TM4C123x MCUs																																			
TM4C1230E6PM	128	32	2K	M4	80	0	0	0	0	0	1	–	0	8	6	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C1230H6PM	256	32	2K	M4	80	0	0	0	0	0	1	–	0	8	6	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C1231E6PM	128	32	2K	M4	80	0	0	0	0	0	1	–	0	8	4	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C1231E6PZ	128	32	2K	M4	80	0	0	0	0	0	1	–	0	8	6	4	0	12	1	2	0	0	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C1231H6PGE	256	32	2K	M4	80	0	0	0	0	0	1	–	0	8	6	4	0	12	1	2	0	0	12	24	1M	3/16	0	0	0	0	0	1	–40 to 85	144 LQFP	
TM4C1231H6PM	256	32	2K	M4	80	0	0	0	0	0	1	–	0	8	4	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C1231H6PZ	256	32	2K	M4	80	0	0	0	0	0	1	–	0	8	6	4	0	12	1	2	0	0	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C1232E6PM	128	32	2K	M4	80	0	0	0	0	0	1	D	0	8	6	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C1232H6PM	256	32	2K	M4	80	0	0	0	0	0	1	D	0	8	6	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C1233E6PM	128	32	2K	M4	80	0	0	0	0	0	1	D	0	8	4	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C1233E6PZ	128	32	2K	M4	80	0	0	0	0	0	1	D	0	8	6	4	0	12	1	2	0	0	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C1233H6PGE	256	32	2K	M4	80	0	0	0	0	0	1	D	0	8	6	4	0	12	1	2	0	0	12	24	1M	3/16	0	0	0	0	0	1	–40 to 85	144 LQFP	
TM4C1233H6PM	256	32	2K	M4	80	0	0	0	0	0	1	D	0	8	4	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C1233H6PZ	256	32	2K	M4	80	0	0	0	0	0	1	D	0	8	6	4	0	12	1	2	0	0	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C1236E6PM	128	32	2K	M4	80	0	0	0	0	0	1	0	0	8	6	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C1236H6PM	256	32	2K	M4	80	0	0	0	0	0	1	0	0	8	6	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C1237E6PM	128	32	2K	M4	80	0	0	0	0	0	1	0	0	8	4	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C1237E6PZ	128	32	2K	M4	80	0	0	0	0	0	1	0	0	8	6	4	0	12	1	2	0	0	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C1237H6PGE	256	32	2K	M4	80	0	0	0	0	0	1	0	0	8	6	4	0	12	1	2	0	0	12	24	1M	3/16	0	0	0	0	0	1	–40 to 85	144 LQFP	
TM4C1237H6PM	256	32	2K	M4	80	0	0	0	0	0	1	0	0	8	4	4	0	12	1	2	0	0	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C1237H6PZ	256	32	2K	M4	80	0	0	0	0	0	1	0	0	8	6	4	0	12	1	2	0	0	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C123AE6PM	128	32	2K	M4	80	0	0	0	0	0	2	–	0	8	6	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C123AH6PM	256	32	2K	M4	80	0	0	0	0	0	2	–	0	8	6	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C123BE6PM	128	32	2K	M4	80	0	0	0	0	0	2	–	0	8	4	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C123BE6PZ	128	32	2K	M4	80	0	0	0	0	0	2	–	0	8	6	4	0	12	1	2	16	2	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C123BH6PGE	256	32	2K	M4	80	0	0	0	0	0	2	–	0	8	6	4	0	12	1	2	16	2	12	24	1M	3/16	0	0	0	0	0	1	–40 to 85	144 LQFP	
TM4C123BH6PM	256	32	2K	M4	80	0	0	0	0	0	2	–	0	8	4	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C123BH6PZ	256	32	2K	M4	80	0	0	0	0	0	2	–	0	8	6	4	0	12	1	2	16	2	12	22	1M	3/16	0	0	0	0	0	1	–40 to 85	100 LQFP	
TM4C123BH6ZRB	256	32	2K	M4	80	0	0	0	0	0	2	–	0	8	6	4	0	12	1	2	16	2	12	24	1M	3/16	0	0	0	0	0	1	–40 to 85	157 BGA	
TM4C123FE6PM	128	32	2K	M4	80	0	0	0	0	0	2	0	0	8	6	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	0	–40 to 85	64 LQFP	
TM4C123FH6PM	256	32	2K	M4	80	0	0	0	0	0	2	0	0	8	6	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	0	–40 to 105	64 LQFP	
TM4C123GE6PM	128	32	2K	M4	80	0	0	0	0	0	2	0	0	8	4	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	1	–40 to 85	64 LQFP	
TM4C123GE6PZ	128	32	2K	M4	80	0	0	0	0	0	2	0	0	8	6	4	0	12	1	2	16	2	12	22	1M	3/16	0	0	0	0	0	1	–40 to 105	100 LQFP	
TM4C123GH6PGE	256	32	2K	M4	80	0	0	0	0	0	2	0	0	8	6	4	0	12	1	2	16	2	12	24	1M	3/16	0	0	0	0	0	1	–40 to 105	144 LQFP	
TM4C123GH6PM	256	32	2K	M4	80	0	0	0	0	0	2	0	0	8	4	4	0	12	1	2	16	2	12	12	1M	2/16	0	0	0	0	0	1	–40 to 105	64 LQFP	
TM4C123GH6PZ	256	32	2K	M4	80	0	0	0	0	0	2	0	0	8	6	4	0	12	1	2	16	2	12	22	1M	3/16	0	0	0	0	0	1	–40 to 105	100 LQFP	
TM4C123GH6ZRB	256	32	2K	M4	80	0	0	0	0	0	2	0	0	8	6	4	0	12	1	2	16	2	12	24	1M	3/16	0	0	0	0	0	1	–40 to 105	157 BGA	

TM4C Product Selector (continued)


TM4C123x/TM4C129x Microcontrollers

Part Number	Memory			Core	External I/Fs		Serial Interfaces								Timers					Analog			Data Protection					Low Pwr	Temperature Range (°C)	Pin/Package				
	Flash (KB)	SRAM (KB)	EEPROM (Bytes)		ARM® Cortex® CPU	Max Speed (MHz)	External Peripheral I/F	LCD Controller Module	Ethernet			USB		UART	I²C	SSI/ SPI		General-Purpose (Total)	Real-Time Clock (RTC)	Watchdog	PWM Outputs	QEI Channels	Resolution (bits)	Channels	Speed (samples/sec)	Analog/Digital Comparators	Tamper Signals	CRC			AES	DES	SHA/MD5	Battery-Backed Hibernation
									10/100 MAC+PHY	10/100 MAC with MII I/F	IEEE 1588	CAN MAC	USB D, H, or O			HS USB PHY I/F (ULPI)																		
TM4C129x MCUs																																		
TM4C1292NCPDT	1024	256	6K	M4	120	1	0	0	1	1	2	0	1	8	10	4	4	8	1	2	8	1	12	20	2M	3/16	4	1	0	0	0	1	-40 to 105	128 TQFP
TM4C1292NCZAD	1024	256	6K	M4	120	1	0	0	1	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	0	0	0	1	-40 to 105	212 BGA
TM4C1294KCPDT	512	256	6K	M4	120	1	0	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	20	2M	3/16	4	1	0	0	0	1	-40 to 105	128 TQFP
TM4C1294NCPDT	1024	256	6K	M4	120	1	0	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	20	2M	3/16	4	1	0	0	0	1	-40 to 105	128 TQFP
TM4C1294NCZAD	1024	256	6K	M4	120	1	0	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	0	0	0	1	-40 to 105	212 BGA
TM4C1299KCZAD	512	256	6K	M4	120	1	1	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	0	0	0	1	-40 to 105	212 BGA
TM4C1299NCZAD	1024	256	6K	M4	120	1	1	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	0	0	0	1	-40 to 105	212 BGA
TM4C129DNCPDT	1024	256	6K	M4	120	1	0	0	1	1	2	0	1	8	10	4	4	8	1	2	8	1	12	20	2M	3/16	4	1	1	1	1	1	-40 to 105	128 TQFP
TM4C129DNCZAD	1024	256	6K	M4	120	1	0	0	1	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	1	1	1	1	-40 to 105	212 BGA
TM4C129EKCPDT	512	256	6K	M4	120	1	0	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	20	2M	3/16	4	1	1	1	1	1	-40 to 105	128 TQFP
TM4C129ENCPDT	1024	256	6K	M4	120	1	0	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	20	2M	3/16	4	1	1	1	1	1	-40 to 105	128 TQFP
TM4C129ENCZAD	1024	256	6K	M4	120	1	0	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	1	1	1	1	-40 to 105	212 BGA
TM4C129LNCZAD	1024	256	6K	M4	120	1	1	1	0	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	1	1	1	1	-40 to 105	212 BGA
TM4C129XKCZAD	512	256	6K	M4	120	1	1	1	1	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	1	1	1	1	-40 to 105	212 BGA
TM4C129XNCZAD	1024	256	6K	M4	120	1	1	1	1	1	2	0	1	8	10	4	4	8	1	2	8	1	12	24	2M	3/16	4	1	1	1	1	1	-40 to 105	212 BGA


Package options




157-ball BGA




212-ball BGA




64-pin LQFP



100-pin LQFP



128-pin TQFP



144-pin LQFP

TivaWare™ Software for C Series

TivaWare™ Software for C Series provides free-license and royalty-free source code that customers can use to accelerate their time to market and reduce their total cost of software ownership.

Graphics library	USB library	Sensor Hub library	Open source RTOS	Open source stacks	Utilities: Checksum security	Code examples	Third-party examples
Peripheral driver library							
Boot loader and in-system programming support							
TivaWare™ Software for C Series							

Libraries and code examples

Use the TivaWare for C Series software libraries and start spending your time differentiating your solution!




Peripheral driver library

Set of BSD licensed functions for controlling TM4C peripherals.



USB library

TivaWare royalty-free USB stack is provided to enable efficient USB host, device, and on-the-go operations.



Graphics library

Royalty-free set of graphics primitives and widgets to create GUIs.



Sensor Hub library

TM4C Sensor Hub library offers an advanced sensor fusion algorithm and a broad range of sensor support.



CMSIS DSP library

Full support for ARM®'s Cortex® Microcontroller Software Interface Standard (CMSIS) libraries.




Ethernet

Integrated Ethernet MAC+PHY with support with lwIP, MuP and TI's Networking Development Kit (NDK).

Interactive Development Environment (IDE)

TivaWare Software for C Series is pre-built using five different compilers.



Code Composer Studio™ (CCStudio) is an integrated development environment (IDE) for all of Texas Instruments embedded processor families.



GNU



mentor
embedded

IAR
SYSTEMS


TM4C Software Ecosystem

PinMux Utility



- Easy-to-use tool for configuring the GPIOs
- Generates source code in C
- Automatically checks and solves pin conflicts
- Intuitive user interface
- Provided free of charge

In-System Programming Support



- Boot loaders available in on-chip ROM
- Boot loader customized in Flash memory
- Serial Flash loader

Download: www.ti.com/tool/implashprogrammer

Real-Time Operating System (RTOS)



TI Worldwide Technical Support

Internet

TI Semiconductor Product Information Center Home Page

support.ti.com

TI E2E™ Community Home Page

e2e.ti.com

Product Information Centers

Americas	Phone	+1(512) 434-1560
Brazil	Phone	0800-891-2616
Mexico	Phone	0800-670-7544
	Fax	+1(972) 927-6377
	Internet/Email	support.ti.com/sc/pic/americas.htm

Europe, Middle East, and Africa

Phone	
European Free Call	00800-ASK-TEXAS (00800 275 83927)
International	+49 (0) 8161 80 2121
Russian Support	+7 (4) 95 98 10 701
Note: The European Free Call (Toll Free) number is not active in all countries. If you have technical difficulty calling the free call number, please use the international number above.	

Fax	+1(972) 927-6377
Internet	www.ti.com/asktexas
Direct Email	asktexas@ti.com

Japan

Phone	Domestic (toll-free number)	0120-92-3326
Fax	International	+81-3-3344-5317
	Domestic	0120-81-0036
Internet/Email	International	support.ti.com/sc/pic/japan.htm
	Domestic	www.tij.co.jp/pic

Asia

Phone	Toll-Free Number
Note: Toll-free numbers may not support mobile and IP phones.	
Australia	1-800-999-084
China	800-820-8682
Hong Kong	800-96-5941
India	000-800-100-8888
Indonesia	001-803-8861-1006
Korea	080-551-2804
Malaysia	1-800-80-3973
New Zealand	0800-446-934
Philippines	1-800-765-7404
Singapore	800-886-1028
Taiwan	0800-006800
Thailand	001-800-886-0010
International	+86-21-23073444
Fax	+86-21-23073686
Email	tiasia@ti.com or ti-china@ti.com
Internet	support.ti.com/sc/pic/asia.htm

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

B012014

The platform bar, Code Composer Studio, E2E, SimpleLink and TivaWare are trademarks of Texas Instruments.
All other trademarks are the property of their respective owners.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com