


ADAM- TECH

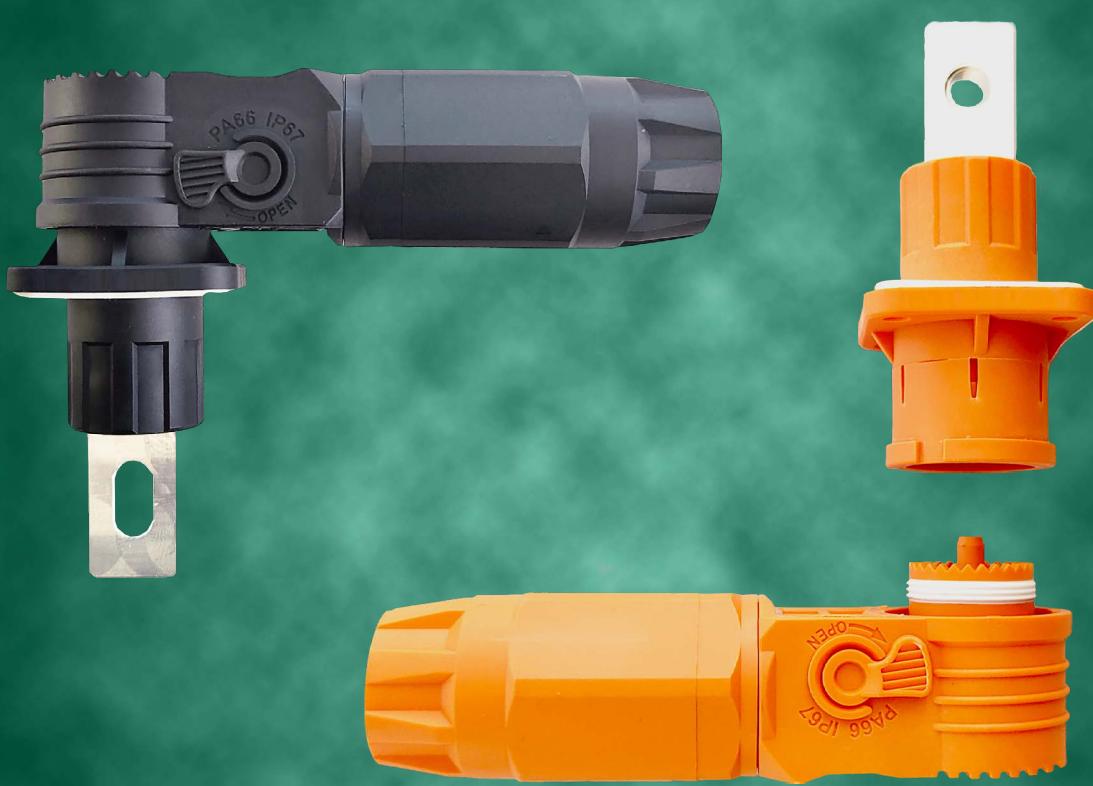

ENERGY STORAGE CONNECTORS

Energy Storage Connectors


Adam Tech's ESF/ESM Series Energy Storage Connectors provide a critical link between battery modules. This link ensures safe and reliable connections in energy storage systems, such as electric vehicle charging, renewable energy devices, and both industrial and consumer energy storage. The series is composed of various mated pairs, offered in both orange and black. Various voltage ratings, current ratings, and wire gauges are supported, making this series compatible with a wide range of applications. Compatible dust covers are available, providing additional protection.

FEATURES AND BENEFITS:


- Providing reliable and efficient energy transfers
- Broad current range of 90A to 350A
- Voltage range of 1000VDC to 1500VDC
- Wire AWG range of 1/0 to 6
- Orange and black housing
- Mated pairs
- IP67 waterproof when mated
- UL 94V-0 flammability protection
- PA66 materials
- RoHS & REACH compliant
- Compatible dust covers

MARKETS & APPLICATIONS:


- Energy storage systems
- Electric vehicles
- Renewable energy
 - Solar array
 - Wind energy
 - Hydropower
- Industrial
- Consumer electronics





ESF Series

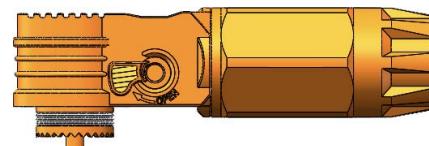


ESM Series

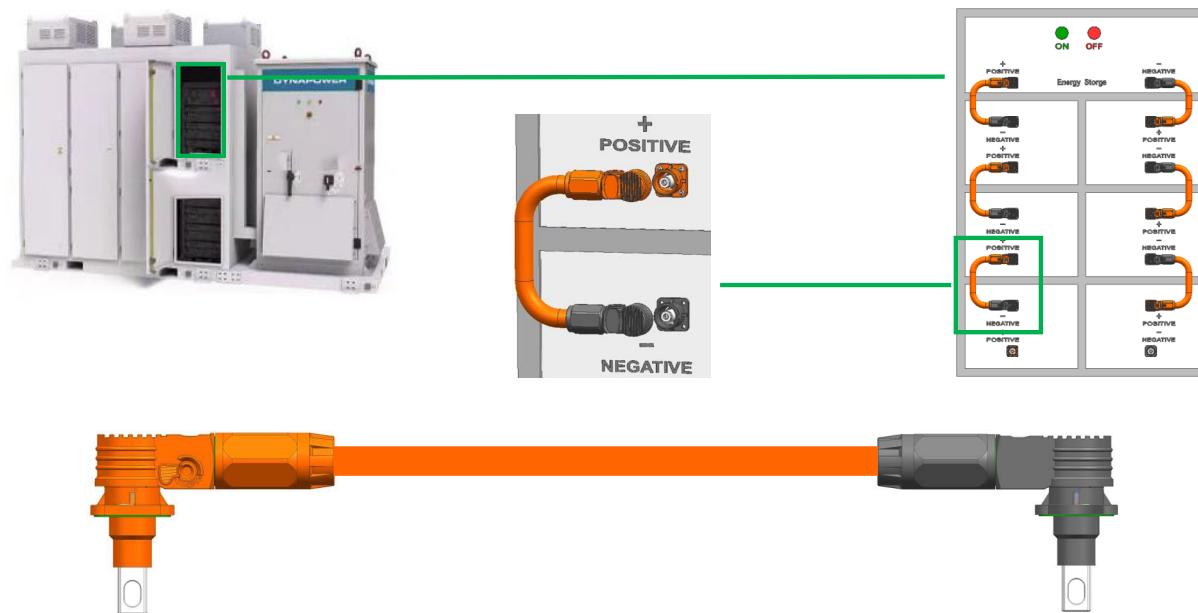

ESF-0XXA02-XXXXXX
ESF-1XXA02-XXXXXX
Energy Storage Connectors
FEMALE

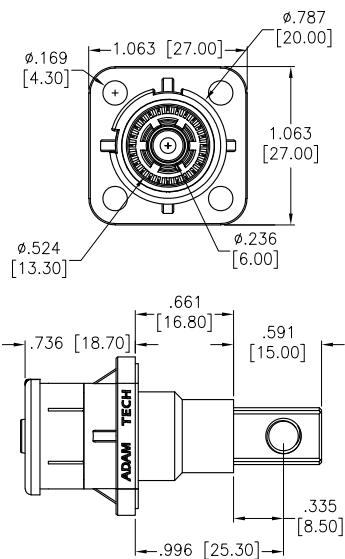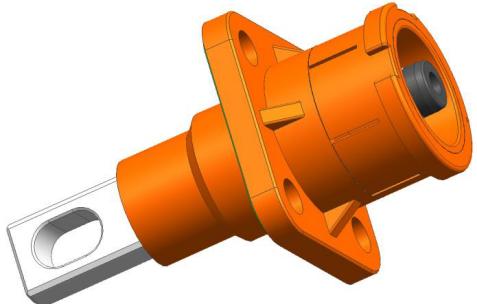

Key Options

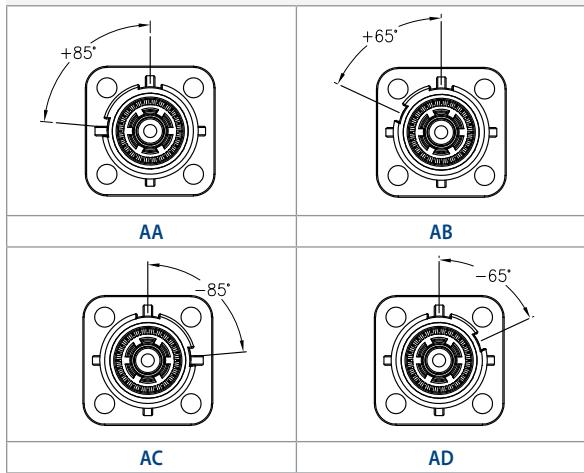

Product Number

ESF - A B A02 - D E XXX

A: Series

B: Current Rating

C: Version

D: Key Options (see bottom of page)

E: Housing Color

F: Terminal Type

090	90 amps
120	120 amps

O	Orange
B	Black

Terminal Type Chart




Code	Terminal	Specification		Universal Model	
010	Threaded Hole	M6x1.0 Thread		-	
020	Busbar (Threaded Hole)	M5x0.8 Thread			
030	Screw Post	M6x1.25 Thread			
040	Busbar (Through Hole)	ø5.20 Hole			
051	Crimp Adam Tech PN: (ESF-120A02-XX051)	AWG American Wire Gauge	Wire Standard: 4 AWG Strand Outer Diameter: ø6.47 Max O.D. (Outside Diameter): ø9.50 Max	120A	
052	Crimp Adam Tech PN: (ESF-120A02-XX052)	International Wire Gauge	Wire Standard: 25mm ² Strand Outer Diameter: ø7.20 Max O.D. (Outside Diameter): ø9.80 Max		
051	Crimp Adam Tech PN: (ESF-090A02-XX051)	AWG American Wire Gauge	Wire Standard: 6 AWG Strand Outer Diameter: ø5.20 Max O.D. (Outside Diameter): ø8.50 Max	090A	
052	Crimp Adam Tech PN: (ESF-090A02-XX052)	International Wire Gauge	Wire Standard: 16mm ² Strand Outer Diameter: ø5.80 Max O.D. (Outside Diameter): ø8.00 Max		

Product Parameters


No.	Name	Parameters
1	Rated Current	90A MAX For 6AWG And 16mm ²
		120A MAX For 4AWG And 25mm ²
2	Rated Voltage	1000V DC
3	Withstand Voltage	3800V DC
4	Contact Resistance	≤5.0mΩ MAX
5	Environment Temperature	-40°~+125°
6	Waterproofing Grade	IP65 IP67 (mating state)
7	Salt Spray Test	48H
8	Mating Life	≥500times
9	Fire Rating	UL 94-V0

Click [here](#) to view datasheet.

ESM-0XXA02-XXX
ESM-1XXA02-XXX
Energy Storage Connectors
MALE

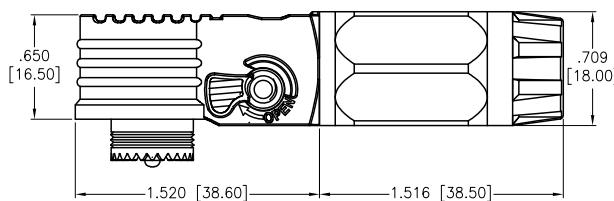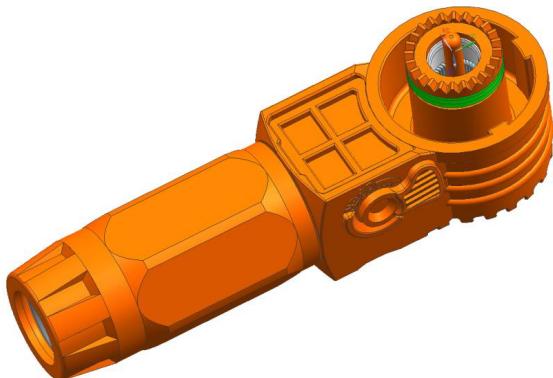

Key Options

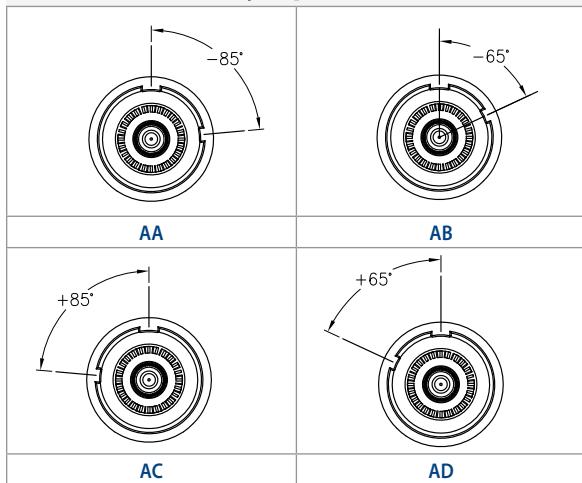

Click [here](#) to view datasheet.

Product Number

ESM – XXX A02 – XX X
A B C D E

A: Series

B: Current Rating

C: Version

D: Key Options (see bottom of page)

E: Housing Color

090	90 amps
120	120 amps

O	Orange
B	Black



Suitable Wire Gauge

Specification		Universal Model
AWG American Wire Gauge	Wire Standard: 4 AWG	120A
	Strand Outer Diameter: ø6.47 Max	
	O.D. (Outside Diameter): ø9.50 Max	
International Wire Gauge	Wire Standard: 25mm ²	090A
	Strand Outer Diameter: ø7.20 Max	
	O.D. (Outside Diameter): ø9.80 Max	
AWG American Wire Gauge	Wire Standard: 6 AWG	090A
	Strand Outer Diameter: ø5.20 Max	
	O.D. (Outside Diameter): ø8.50 Max	
International Wire Gauge	Wire Standard: 16mm ²	090A
	Strand Outer Diameter: ø5.80 Max	
	O.D. (Outside Diameter): ø8.00 Max	

Product Parameters

No.	Name	Parameters
1	Rated Current	090A MAX For 6AWG And 16mm ² 120A MAX For 4AWG And 25mm ²
2	Rated Voltage	1000V DC
3	Withstand Voltage	3800V DC
4	Contact Resistance	≤5.0mΩ MAX
5	Environment Temperature	-40°~+125°
6	Waterproofing Grade	IP65 IP67 (mating state)
7	Salt Spray Test	48H
8	Mating Life	≥500times
9	Fire Rating	UL 94-V0

ESF-2XXA02-XXXXXX
Energy Storage Connector
FEMALE

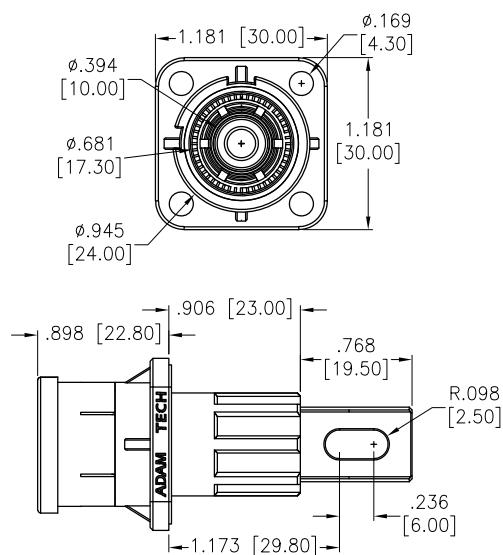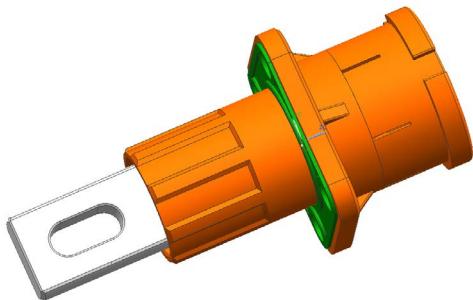

Product Number

ESF – 2XX A02 – XX X XXX

A B C D E F

A: Series

B: Current Rating

C: Version

D: Key Options (see bottom of page)

E: Housing Color

F: Terminal Type


200	200 amps
250	250 amps

O	Orange
B	Black

Terminal Type Chart

Code	Terminal	Specification		Universal Model	
010	Threaded Hole	M6x1.0 Thread		-	
020	Busbar (Threaded Hole)	M8x1.25 Thread			
030	Screw Post	M6x1.0 Thread			
040	Busbar (Through Hole)	ø5.0 Hole			
051	Crimp Adam Tech PN: (ESF-250A02-XX051)	AWG American Wire Gauge	Wire Standard: 1/0 AWG Strand Outer Diameter: ø10.3 Max O.D. (Outside Diameter): ø14.2 Max	250A	
052	Crimp Adam Tech PN: (ESF-250A02-XX052)	International Wire Gauge	Wire Standard: 50mm ² Strand Outer Diameter: ø10.2 Max O.D. (Outside Diameter): ø13.5 Max	250A	
052	Crimp Adam Tech PN: (ESF-200A02-XX052)	International Wire Gauge	Wire Standard: 70mm ² Strand Outer Diameter: ø12.2 Max O.D. (Outside Diameter): ø15.5 Max	200A	

Key Options

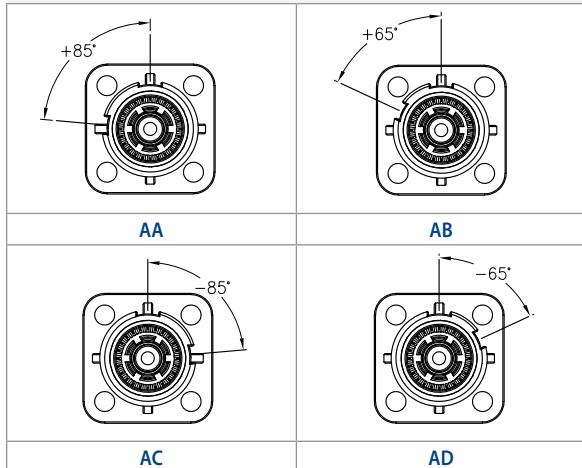

Product Parameters

No.	Name	Parameters
1	Rated Current	200A MAX For 2AWG And 35mm ² 250A MAX For 1/0AWG And 50mm ²
2	Rated Voltage	1500V DC
3	Withstand Voltage	6800V DC
4	Contact Resistance	≤5.0mΩ MAX
5	Environment Temperature	-40°~+125°
6	Waterproofing Grade	IP65 IP67 (mating state)
7	Salt Spray Test	48H
8	Mating Life	≥500times
9	Fire Rating	UL 94-V0




Click [here](#) to view datasheet.




ESM-2XXA02-XXX

Energy Storage Connector

MALE

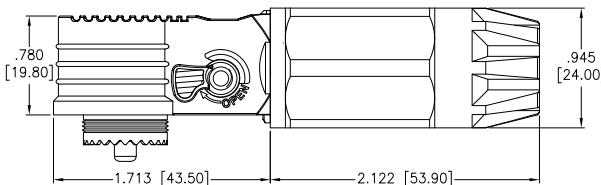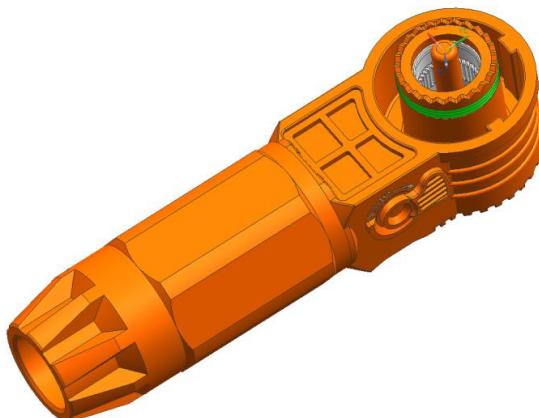

Key Options

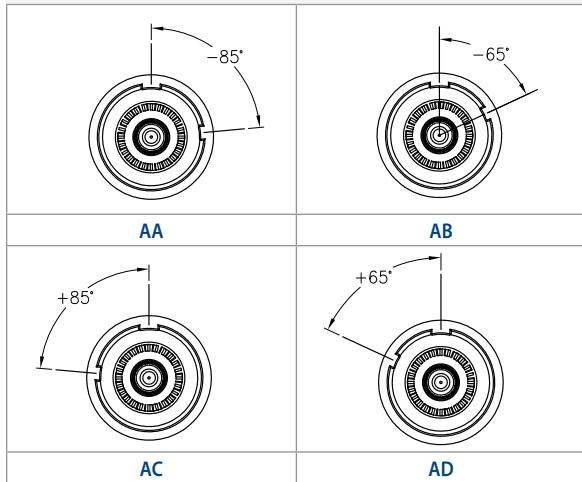

Click [here](#) to view datasheet.

Product Number

ESM - 2XX A02 - XX X
 A B C D E

A: Series
 B: Current Rating
 C: Version
 D: Key Options (see bottom of page)
 E: Housing Color

200	200 amps
250	250 amps

O	Orange
B	Black

Suitable Wire Gauge

Specification		Universal Model
International Wire Gauge	Wire Standard: 70mm ²	250A
	Strand Outer Diameter: Ø12.2 Max	
	O.D. (Outside Diameter): Ø15.5 Max	
AWG American Wire Gauge	Wire Standard: 1/0 AWG	200A
	Strand Outer Diameter: Ø10.3 Max	
	O.D. (Outside Diameter): Ø14.2 Max	
International Wire Gauge	Wire Standard: 50mm ²	
	Strand Outer Diameter: Ø10.2 Max	
	O.D. (Outside Diameter): Ø13.5 Max	



Product Parameters

No.	Name	Parameters
1	Rated Current	200A MAX For 2AWG And 35mm ² 250A MAX For 1/0AWG And 50mm ²
2	Rated Voltage	1500V DC
3	Withstand Voltage	6800V DC
4	Contact Resistance	≤5.0mΩ MAX
5	Environment Temperature	-40°~+125°
6	Waterproofing Grade	IP65 IP67 (mating state)
7	Salt Spray Test	48H
8	Mating Life	≥500times
9	Fire Rating	UL 94-V0


ESF-3XXA02-XXXXXX

Energy Storage Connector

FEMALE

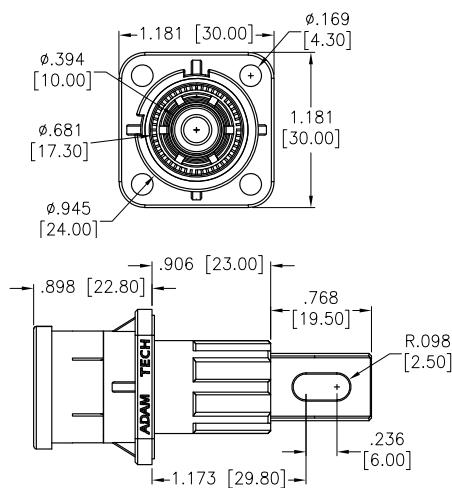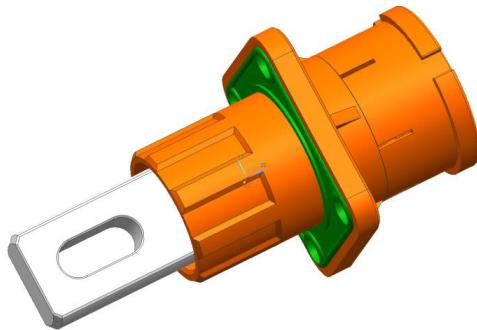

Key Options

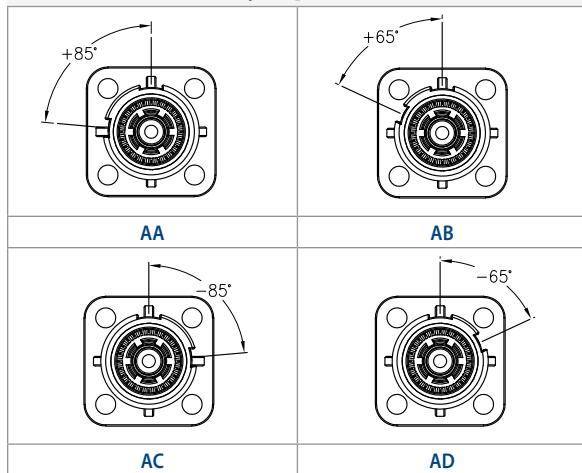

Product Number

ESF – 3XX A02 – XX X XXX

A: Series

B: Current Rating

C: Version

D: Key Options (see bottom of page)

E: Housing Color

F: Terminal Type

300	300 amps
350	350 amps

O	Orange
B	Black

Terminal Type Chart

Code	Terminal	Specification		Universal Model	
010	Threaded Hole	M6x1.0 Thread		-	
020	Busbar (Threaded Hole)	M8x1.25 Thread			
030	Screw Post	M6x1.0 Thread			
040	Busbar (Through Hole)	ø6.0 Hole			
051	Crimp Adam Tech PN: (ESF-350A02-XX051)	AWG American Wire Gauge	Wire Standard: 4/0 AWG Strand Outer Diameter: ø14.7 Max O.D. (Outside Diameter): ø18.5 Max	350A	
052	Crimp Adam Tech PN: (ESF-300A02-XX052)	International Wire Gauge	Wire Standard: 95mm ² Strand Outer Diameter: ø14.2 Max O.D. (Outside Diameter): ø17.6 Max		

Click [here](#) to view datasheet.




Product Parameters

No.	Name	Parameters
1	Rated Current	300A MAX For 3/0AWG And 85mm ² 350A MAX For 4/0AWG And 95mm ²
2	Rated Voltage	1500V DC
3	Withstand Voltage	6800V DC
4	Contact Resistance	≤5.0mΩ MAX
5	Environment Temperature	-40°~+125°
6	Waterproofing Grade	IP65 IP67 (mating state)
7	Salt Spray Test	48H
8	Mating Life	≥500times
9	Fire Rating	UL 94-V0


ESM-3XXA02-XXX

Energy Storage Connector

MALE

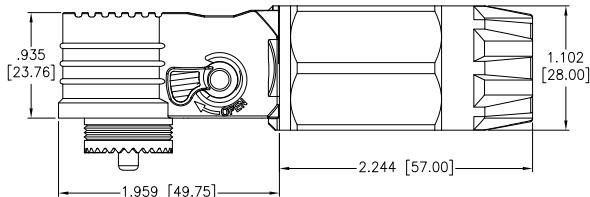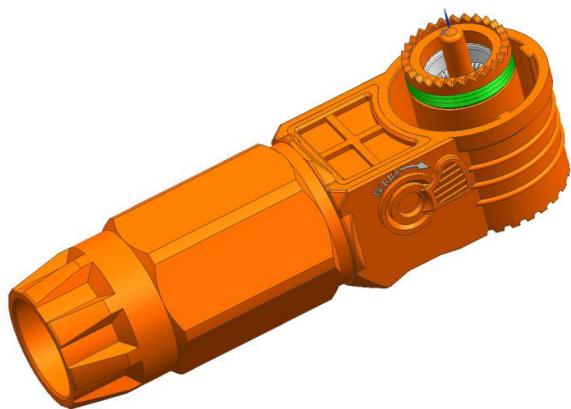

Key Options

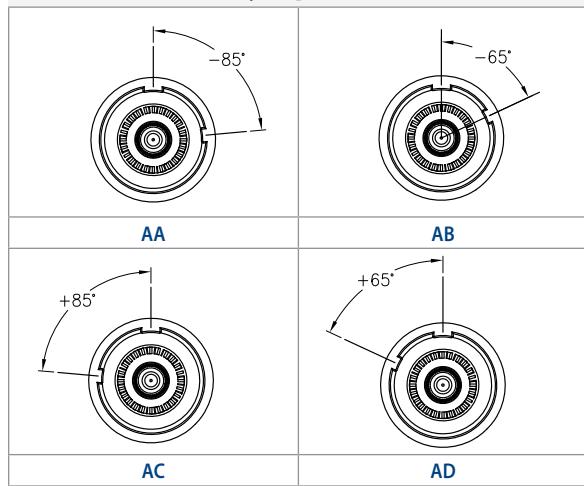

Click [here](#) to view datasheet.

Product Number

ESM - 3XX A02 - XX X
 A B C D E

A: Series
 B: Current Rating
 C: Version
 D: Key Options
 E: Housing Color

300	300 amps
350	350 amps

O	Orange
B	Black

Suitable Wire Gauge

Specification		Universal Model
AWG American Wire Gauge	Wire Standard: 4/0 AWG	350A
	Strand Outer Diameter: Ø14.7 Max	
	O.D. (Outside Diameter): Ø18.5 Max	
International Wire Gauge	Wire Standard: 95mm ²	300A
	Strand Outer Diameter: Ø14.2 Max	
	O.D. (Outside Diameter): Ø17.6 Max	

Product Parameters

No.	Name	Parameters
1	Rated Current	300A MAX For 3/0AWG And 85mm ² 350A MAX For 4/0AWG And 95mm ²
2	Rated Voltage	1500V DC
3	Withstand Voltage	6800V DC
4	Contact Resistance	≤5.0mΩ MAX
5	Environment Temperature	-40°~+125°
6	Waterproofing Grade	IP65 IP67 (mating state)
7	Salt Spray Test	48H
8	Mating Life	≥500times
9	Fire Rating	UL 94-V0

Safety Instructions

The assembly instructions and assembly procedure instructions are an important part and prerequisite for UL certification.

The product can be assembled or installed by personnel who have electrical skills or have been instructed in this respect in accordance with applicable safety regulation.

If you fail to comply with the above and below warnings, Adam Tech will not assume any responsibility.

Only the components and tools specified by our company can be used. When assembling by yourself, do not deviate from the preparation and assembly instructions described in this manual, otherwise our company cannot guarantee the use safety or performance of the product to meet the official technical parameters. Do not modify the product in any way.

Connectors that are not manufactured by our company but can be plugged into our components, as well as connectors that other manufacturers claim to be compatible with our company, do not meet the long-term stable and safe electrical connection requirements. For safety reasons, the above products shall not be used together with our components. Therefore, our company will not bear any responsibility for any loss caused by the connection of such connectors (that is without our approval) with our components.

IEC-60417-6042 Caution: Risk Of Electric Shock

Work in a de-energized state. Follow the five safety rules, when working on electrical installations. After the respective electrical installations have been identified, the following five essential requirements shall be undertaken in the specified order unless there are essential reasons for doing otherwise:

- Disconnect completely
- Secure against re-connection
- Verify absence of operating voltage
- Carry out earthing and short-circuiting
- Provide protection against adjacent live parts

Any person engaged in this work activity shall be electrically skilled or instructed, or shall be supervised by such a person. Source: EN 50110-1:2013. Protection against electric shock shall be checked in the end-use applications.

IEC-60417-6070

Do Not Disconnect Under Load

Do not disconnect or plug connectors under load. The source switch can be closed to make it in no-load state for separation and connection.

ISO 7000-0434B Matters Needing Attention

Before each use of the connector, it is necessary to check in advance whether there are defects on the outside (especially the insulation layer). If there are safety concerns, you must consult professional personnel or replace the connector. The waterproof function of the connector can refer to the IP protection grade of relevant products. However, they are not suitable for long-term underwater use. Do not put the connector directly in the environment without any protection for a long time. The rated voltage is the maximum voltage and is only suitable for cable connectors. The final rated voltage of the cable harness depends on the lowest and maximum rated voltage of the component and the relevant standards for its evaluation and certification. Connectors that are not plugged in must be protected from moisture and dust with sealing covers. Contaminated male and female connectors should not be plugged in. The components shall not be subjected to permanent mechanical tensile loads. According to local electrical codes and standards, cables shall be fixed with ties. Always observe the prescribed installation position. Confirm that the correct coding is used. Parts and packaging materials are not toys; there is a risk of suffocation if small parts are swallowed. The packaging materials may cause suffocation. The product must be used in strict accordance with the specifications given in the technical parameters (such as providing sufficient back ventilation to ensure that the connector is in the normal operating temperature range). It is strictly forbidden to pollute the product with any grease.

Note On Storage

We recommend that you store connector components at a temperature between -30°C and +60°C and with a relative humidity of less than 70%.

The components must not be exposed to moisture due to direct rainfall, condensation, etc. Ensure that the individual components do not come into contact with acids, alkalis, gases, acetone, or any other chemical substances that could impact the materials used.

If these conditions are met, the components can be stored for a maximum period of up to two years from the date of manufacture.

Scope Of Application

The expected application of energy storage connectors and corresponding tools is the basic requirement for safe application and technically correct assembly of connectors. The energy storage connector shall only be used for power energy storage and large current transmission applications. It is only allowed to be applied within the technical specifications described in item 1. Only qualified and experienced personnel are allowed to use the tools issued by our company for assembly and application, and the assembly instructions, installation standards and national and international safety regulations should be considered.

Examples Of Unintended Use

- Failure to observe safety regulations
- Failure to observe the safety instructions of these assembly instructions
- Use connectors not manufactured or approved by our company

Dangers Of Unintended Use

- Injury to persons as a result of electric shock
- Blindness and or fire hazard due to arcing

Note

The wearing of suitable personal protective equipment (PPE) is in the responsibility of the user.

Adapter Cable

- Adaptation range: 16mm²/6AWG, 25mm²/4AWG
- It is recommended that the cable specification and size should be selected according to the size indicated in the engineering drawing.

Rated Current	Wire Gauge	Conductor Outer Diameter mm	Insulation Outer Diameter mm	Stripping Length mm
90A	6 AWG	5.0±0.2	8.5±0.3	14.5±0.5
	16mm ²	5.6±0.2	8.0±0.3	
120A	4 AWG	6.4±0.2	9.8±0.3	14.5±0.5
	25mm ²	6.9±0.2	9.5±0.370	
200A	1/0 Awg	10.3 ±0.2	14.2 ±0.3	18.0±1
	50mm ²	10.2 ±0.2	13.5 ±0.3	
250A	2/0 Awg	11.6±0.2	15.8 Max.	18.0±1
	70mm ²	12.2 ±0.2	15.5 ±0.3	
300A	95mm ²	14.2 ±0.2	17.6 ±0.3	20.0±1
350A	4/0 Awg	14.7 ±0.2	18.5 ±0.3	20.0±1

Assembly Process

Tools Required:

- Please use special wire cutters and wire strippers
- Special wire crimping machine
- 18mm open-end wrench

Assembly Process

Male Head


Unscrew the nut and waterproof ring.



Strip the insulation layer off the cable.




Attach nut and waterproof ring to cable.




Insert the conductor into the cable slot.



Press the conductor part of the cable into the front terminal, leaving a 1.0-1.5mm flare at the end of the terminal.

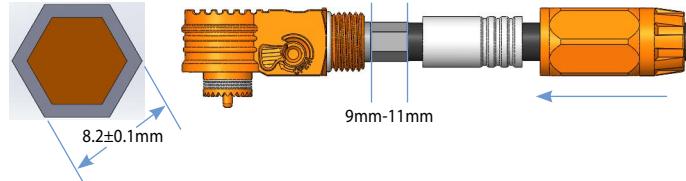

Push the waterproof ring and nut clockwise to the plug and tighten (torque: $\leq 0.5\text{N}\cdot\text{m}$).

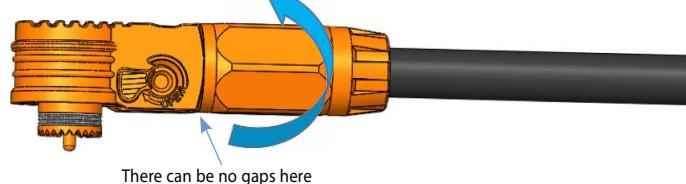


Female Head

Products with the last three digits of the socket number being 010, 020, 030, or 040 are universal hard-connected copper bars that can accommodate a maximum current of 120A.

Our company has completed the assembly before leaving the factory, and customers can install and use them directly.

For more detailed product information, please refer to the engineering drawing.




Strip the insulation layer off the cable.
051/052 terminal stripping length $14.5\pm 0.5\text{mm}$.




Insert the stripped cable into the male terminal until the insulation layer touches the terminal, and use a crimping machine to perform hexagonal crimping.



Insert the crimped terminal into the socket until you hear a "click" sound. Pull the cable back slightly to confirm that the terminal is firmly in place.




Use heat shrink tubing to completely wrap the exposed terminal, and wrap the cable about 30mm, and use a hot air gun to shrink the heat shrink tubing.

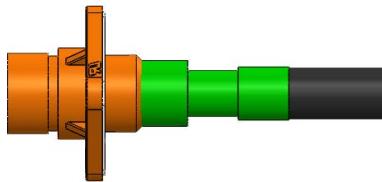



Assembly Process

Socket Mounting Method

Use M4 combination screws to lock the socket connector on the panel with waterproof pads (recommended torque is 0.80-1N.m).

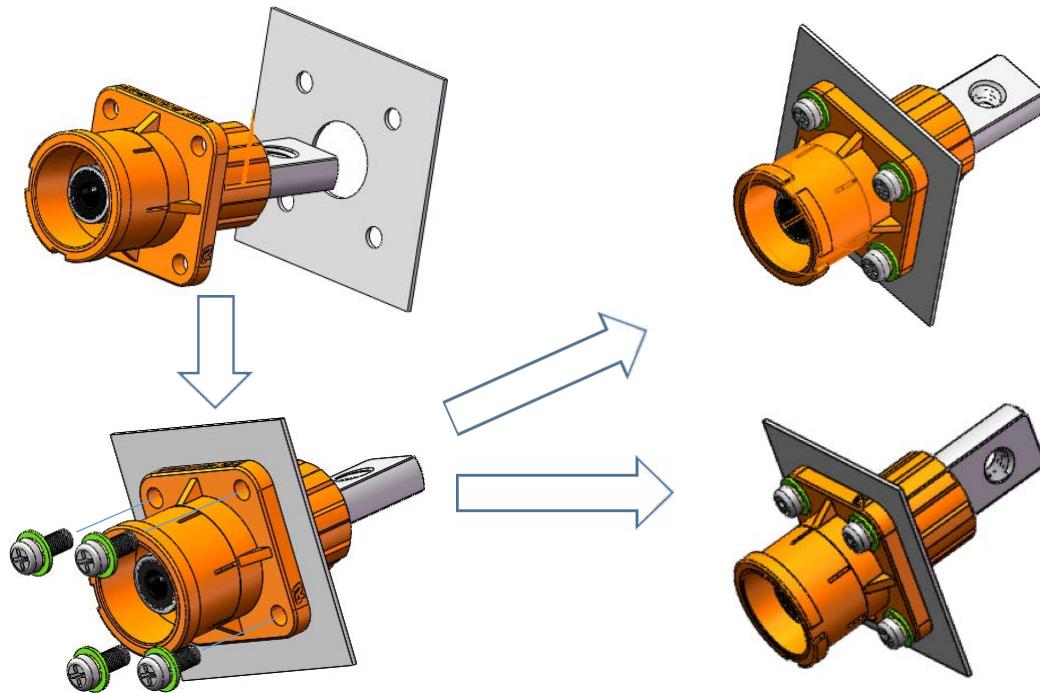

Note: Please use recommended screw torque.

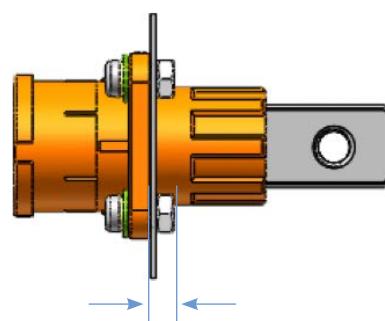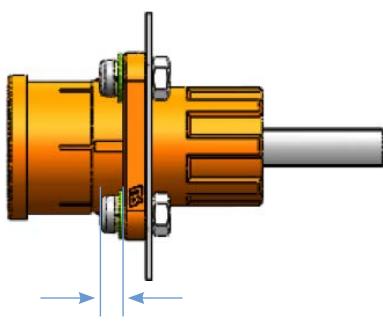


Note: If there are special requirements, the fasteners need to be added with an insulating layer.

Assembly Process

Male and Female Connector Mating


Manually mate the plug connector to the corresponding socket connector according to the customer's installation angle until a "click" sound is heard.

Connect receptacle terminal with customer's busbar contact.

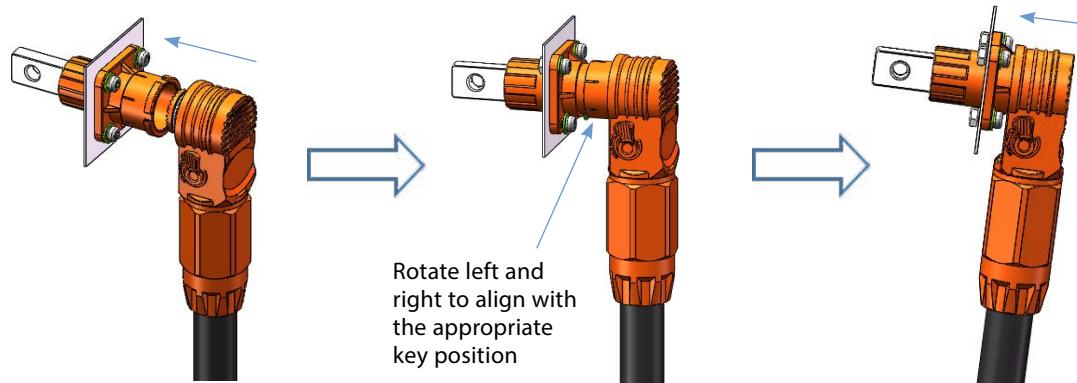

Connecting to Busbar

Use bolt, spring washer and flat washer.

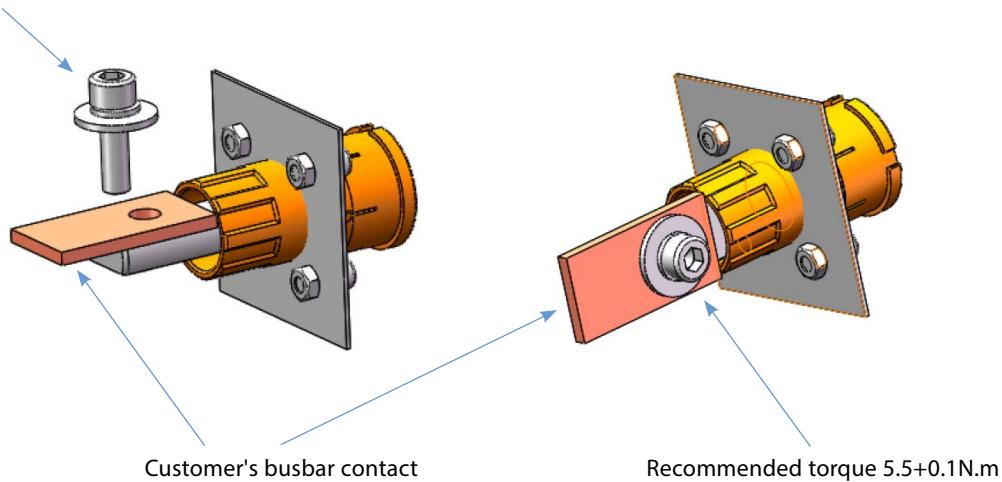

Note: Please use the recommended torque and verify it if modified.



To contact us, scan the QR
code to reach our website
inquiry form.

adam-tech.com