

6

5

4

3

2

1

D

D

C

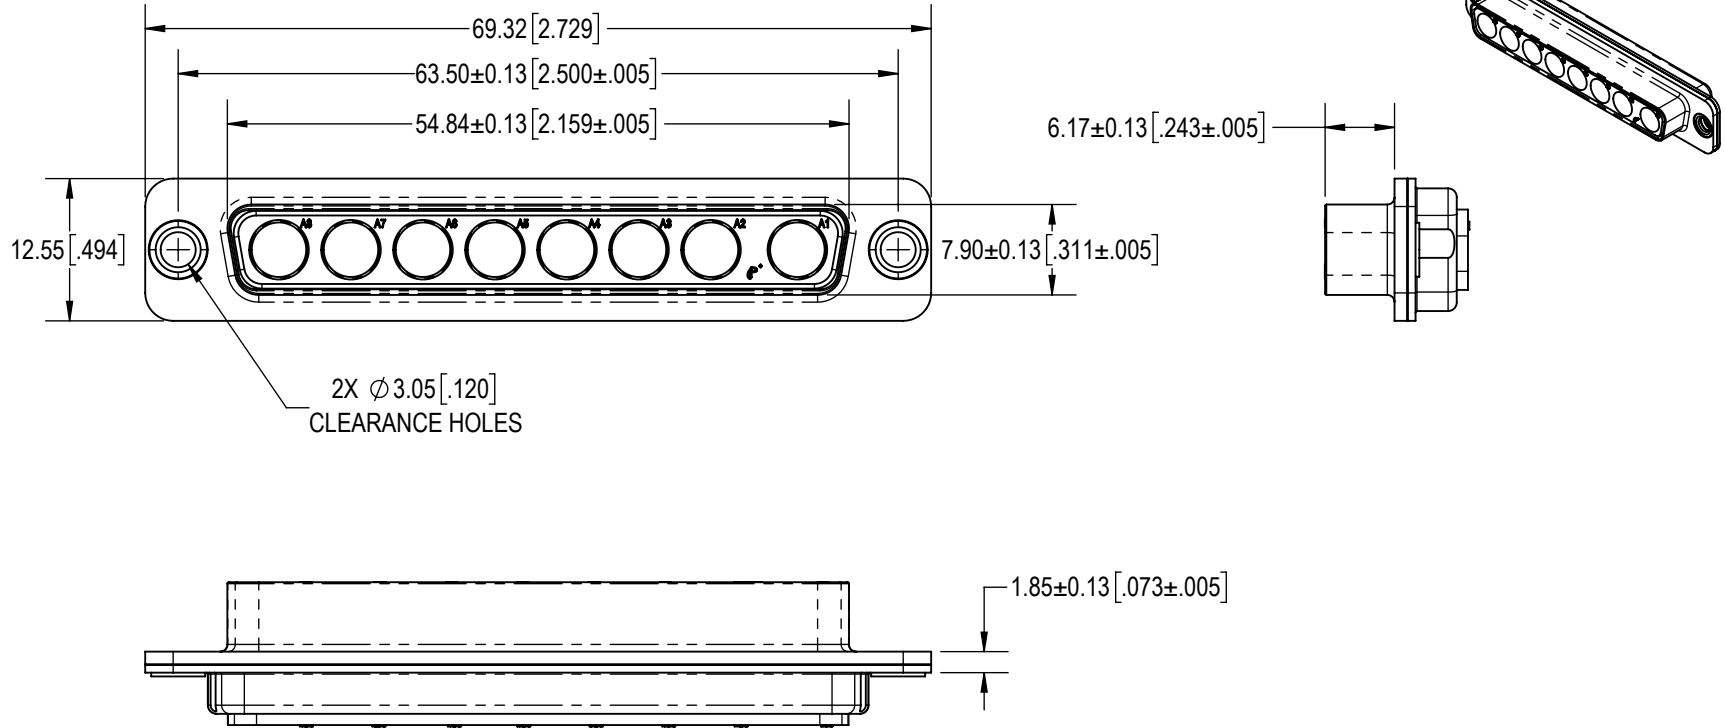
C

B

B

A

A

**NOTES:**

- MATERIAL AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM-D-5927, UL 94V-0, COLOR: BLUE.
SHELLS: PRECISION-MACHINED ALUMINUM, ELECTROLESS NICKEL PLATE.
RIVETS: STAINLESS STEEL, PASSIVATED.
- DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY MACH-D PRODUCT PUBLIATION AT CONNECTPOSITRONIC.COM.
- CONNECTORS ARE COMPLIANT TO THE CURRENT RoHS DIRECTIVE.

BY SS	CHK AP	3RD ANGLE 	POSITRONIC RELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.	
APR AB	RELEASED DATE: 2024-07-17	SCALE NTS		
TOLERANCES ±0.03mm [.001 INCHES]FOR MALE CONTACT MATING DIAMETERS ±0.08mm [.003 INCHES]FOR CONTACT TERMINATION DIAMETERS ±0.13mm [.005 INCHES]FOR ALL OTHER DIAMETERS ±0.38mm [.015 INCHES]FOR ALL OTHER DIMENSIONS ±5° FOR ALL ANGLES DIMENSION ARE IN MILLIMETERS [INCHES]		PART NUMBER MCBX8W8S0000K/AA	SERIES MCBX	
		TITLE MCBX8W8S0000K/AA		
CREATED ON: 2024-07-17		SHEET SHEET 1 OF 1	REV A	

6

5

4

3

2

1