

6

5

4

3

2





1

D

C

B

A

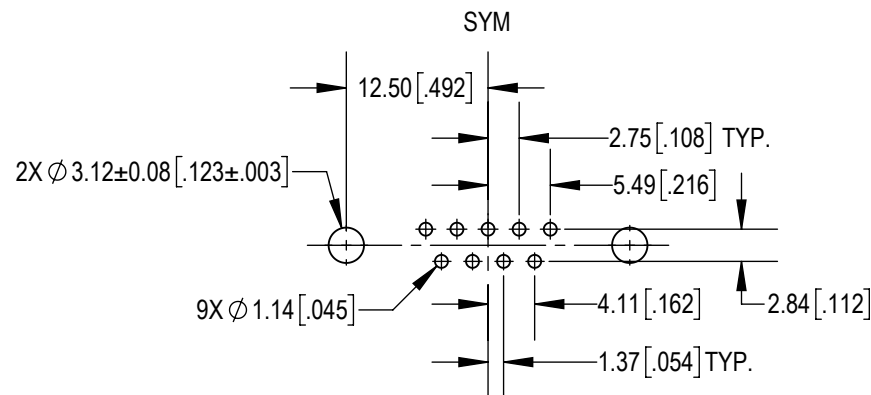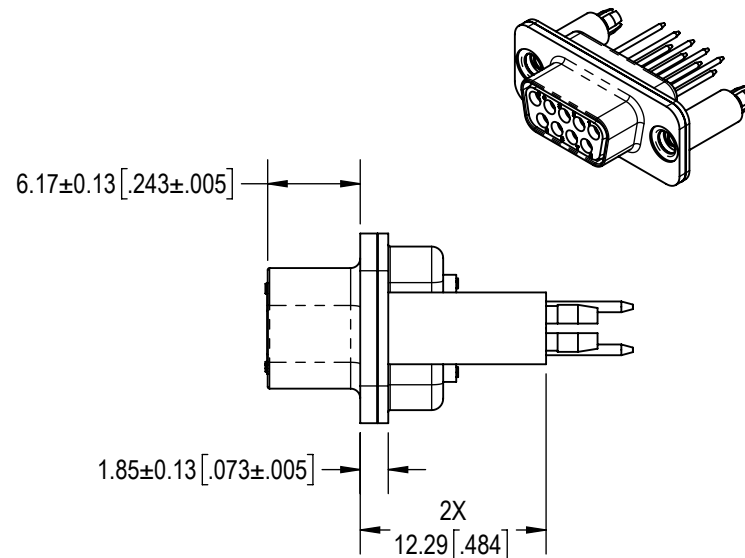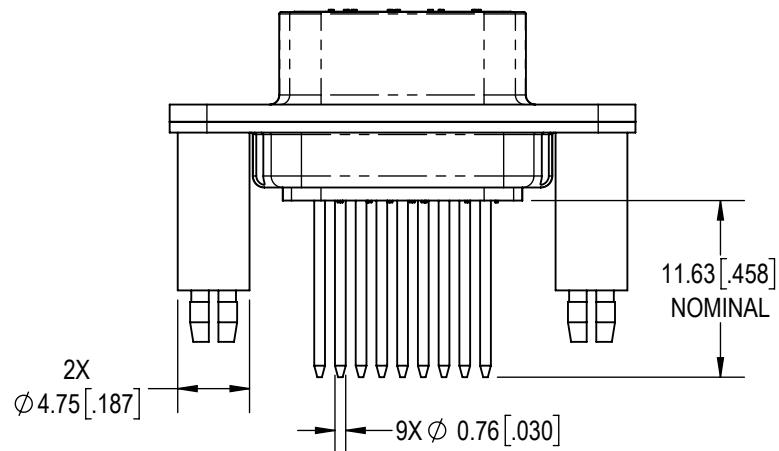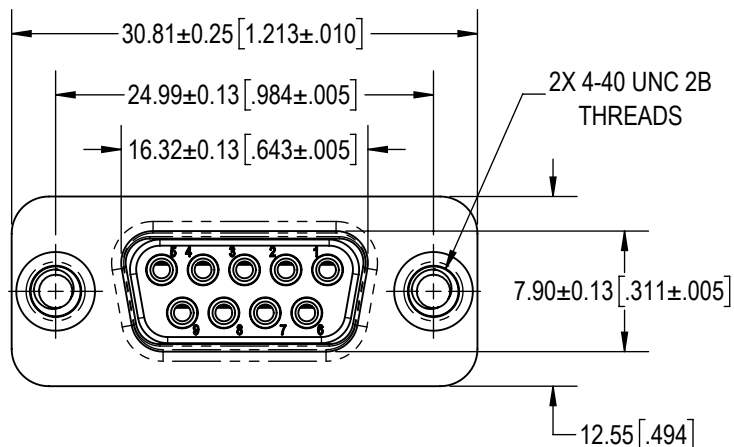

## CONTACT HOLE PATTERN


## NOTES:

## 1. MATERIAL AND FINISHES:

INSULATOR: GLASS-FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE  
CONTACTS: PRECISION MACHINED COPPER ALLOY, 1.27μ [.000050] GOLD OVER NICKEL PLATE.  
SHELLS: PRECISION-MACHINED ALUMINUM, ELECTROLESS NICKEL PLATE.  
PUSH FASTENERS: PHOSPHOR BRONZE, 1.27μ [.000050] GOLD OVER NICKEL PLATE.

## 2. DETAILED PRODUCT, ELECTRICAL AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY MACH-D PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.

## 3. CONNECTOR IS COMPLIANT TO CURRENT RoHS DIRECTIVES.

BY	GJ	CHK	AP	3RD ANGLE	POSITRONIC BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.	 <b>Positronic®</b> CONNECTPOSITRONIC.COM
APR	AB	RELEASED DATE:	2024-09-12	SCALE		
TOLERANCES				NTS		
+0.03mm [.001 INCHES] FOR MALE CONTACT MATING DIAMETERS +0.08mm [.003 INCHES] FOR CONTACT TERMINATION DIAMETERS +0.13mm [.005 INCHES] FOR ALL OTHER DIAMETERS +0.38mm [.015 INCHES] FOR ALL OTHER DIMENSIONS +5° FOR ALL ANGLES DIMENSION ARE IN MILLIMETERS [INCHES]				PART NUMBER	MCD9S39S600K/AA-15	SERIES MACH-D
				TITLE	MCD9S39S600K/AA-15	
				CREATED ON:	2024-09-12	SHEET SHEET 1 OF 1
						REV A