

6

5

4

3

2

1

D

D

C





C

B

B

A

A

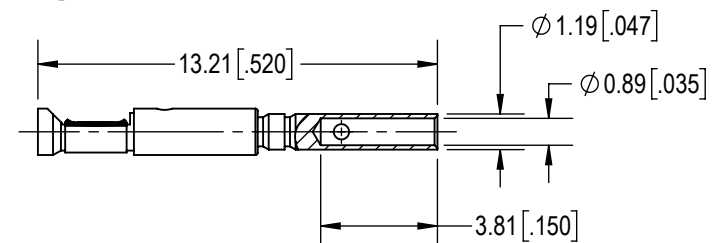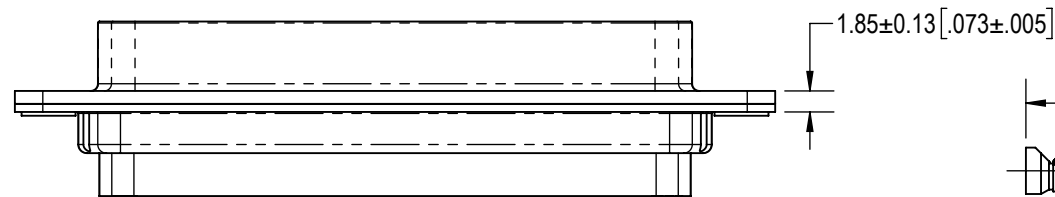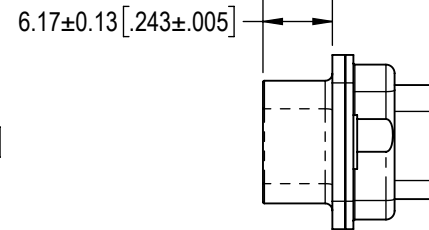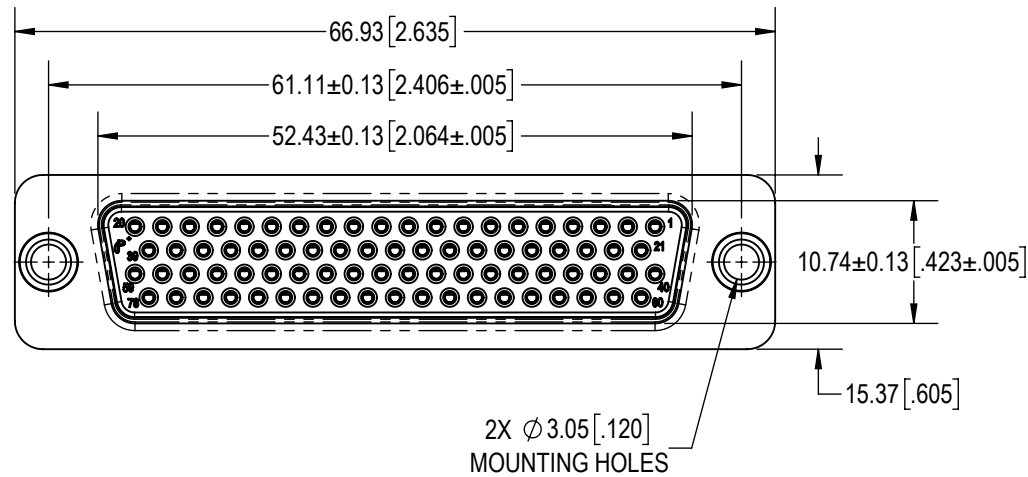

78X FEMALE CONTACT

NOTES:

1. MATERIAL AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE.

CONTACTS: PRECISION MACHINED COPPER ALLOY, 1.27µ [.000050] GOLD OVER NICKEL PLATE.

SHELLS: PRECISION-MACHINED ALUMINUM, ELECTROLESS NICKEL PLATE.

RIVETS: STAINLESS STEEL, PASSIVATED.

2. DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY MACH-D PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.3. CRIMPING TOOL INFORMATION IS AVAILABLE AT WWW.CONNECTPOSITRONIC.COM/CrimpToolCrosslist.

4. CONNECTORS ARE COMPLIANT TO THE CURRENT RoHS DIRECTIVE.

BY SB		CHK AP		3RD ANGLE 		POSITRONIC BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.		 Positronic® CONNECTPOSITRONIC.COM			
APR AB		RELEASED DATE: 2024-04-25		SCALE NTS							
TOLERANCES +0.03mm [.001 INCHES]FOR MALE CONTACT MATING DIAMETERS +0.08mm [.003 INCHES]FOR CONTACT TERMINATION DIAMETERS +0.13mm [.005 INCHES]FOR ALL OTHER DIAMETERS +0.38mm [.015 INCHES]FOR ALL OTHER DIMENSIONS +5° FOR ALL ANGLES DIMENSION ARE IN MILLIMETERS [INCHES]					PART NUMBER MCDD78S1000K/AA-15		SERIES MACH-D				
TITLE MCDD78S1000K/AA-15						CREATED ON: 2024-04-24		SHEET SHEET 1 OF 1		REV A	

6

5

4

3

2

1