



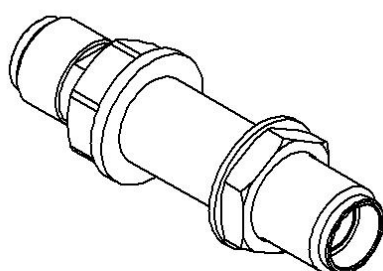


PAGE 1/2	ISSUE 28-09-22A	SERIES ATTENUATOR	PART NUMBER R429820000
----------	--------------------	----------------------	-------------------------------

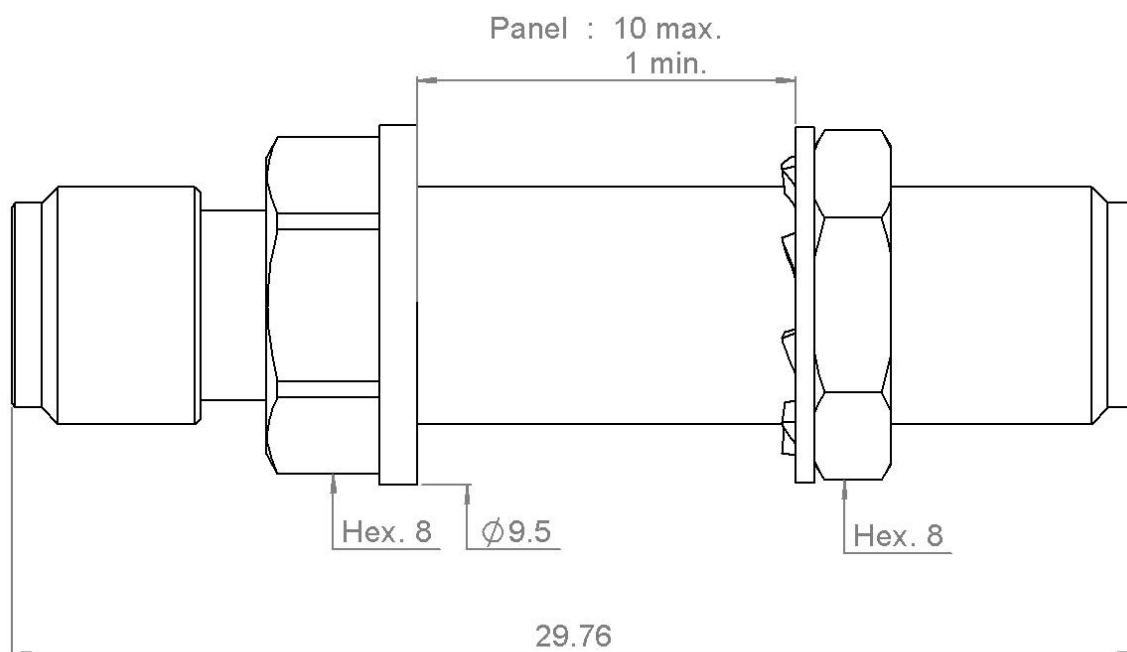

Panel cutout
Panel thickness : 10 max.
1 min.

All dimensions are in mm. Tolerances according ISO 2768 c-K



COMPONENTS	MATERIALS	PLATING (µm)
Body	BRASS.	BBR
Male center contact	BERYLIUM COPPER	GOLD OVER NICKEL
Female center contact	BERYLIUM COPPER	GOLD OVER NICKEL
Outer contact		
Insulator	PTFE	
Gasket	SILICONE RUBBER	
Substrate	ALUMINIUM NITRIDE	
Resistor	THIN FILM	
Others parts		-

PAGE 2/2	ISSUE 28-09-22A	SERIES ATTENUATOR	PART NUMBER R429820000
----------	--------------------	----------------------	-------------------------------

ELECTRICAL CHARACTERISTICS

Frequency (GHz)	DC - 2	2 - 4	4 - 8	8 - 12.4	2
V.S.W.R (\leq)	1.1	1.15	1.2	1.25	1.35
Deviation(\pm dB)	0.6	0.6	0.6	0.6	0.6


Operating Frequency Range	DC - 18	GHz
Impedance	50	Ω
Nominal Attenuation	20	dB
Peak power at 25°C (1 μ s, 1%)	100	W
Average power at 25°C	2	W (Free Air Cooled)
		W (Conduction Cooled)

MECHANICAL CHARACTERISTICS

Connectors	SMA	Female Female	MIL C39012
Weight (\pm 15%)	6,6920	g	

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range	10mK/+125 °C
Storage temperature range	10mK/+125 °C

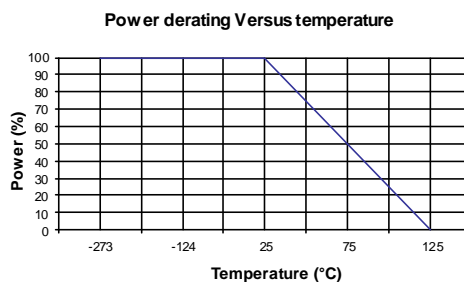

SPECIFICATION

OTHER CHARACTERISTICS