

# 3M™ Dynatel™ Triple Play Customer Service Test Set INS970

## Advanced Diagnostics Software Options – DELT, SELT and Spectral Analysis

The INS970 Test Set has the ability to run “advanced diagnostics” in different scenarios to help the technician troubleshoot problems with both active and inactive pairs.

The DELT (Dual Ended Line Tests) functionality leverages the power of the DSLAM to conduct a two-ended analysis of the line. This is extremely useful for several reasons:

- It saves valuable time, as it doesn't require the DSLAM to be disconnected in order to test the line, saving an extra truck roll.
- It analyzes the line through measurement, which is both more accurate and more realistic, as it tests the line in its final configuration.
- It effectively analyzes the line from both ends in one test, increasing the identification resolution.

When a DSLAM is not available on the pair to be tested, the SELT (Single Ended Line Test) feature set is used. This enables the INS970 test set to test a vacant pair to ensure it is capable of delivering the required service. One of the key features is the data rate estimation (and the associated impairment rate reduction quantification). This is important because the presence of impairment does not necessarily mean the pair is not capable of carrying a particular service. This, in turn, allows the technician to reduce the “false rejection rate” and helps reduce the workload on the cable repair crew.

### Dual Ended Line Tests

The DELT tests are designed to help the technician characterize line quality impairments on pairs that are currently in service but that do not meet the service standards required. For these tests, a DSLAM is required on the other end of the pair as a link partner.




3M™ Dynatel™ Triple Play Customer Service  
Test Set INS970



## Line Attenuation

Line attenuation is a graphical representation of the ability of a pair to conduct signals at different frequencies. In DSL technology, data is transmitted at different frequencies, throughout the available spectrum. Signals at different frequencies are affected differently by things like cable length, bridged taps and splices. The attenuation measurements are plotted by frequency, and the data is then automatically interpreted to determine things like bridged tap presence and data rate reductions.

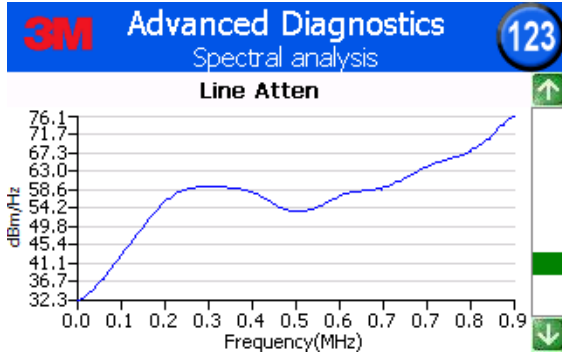


## Single Ended Line Test

The SELT is designed to help the technician “pre-qualify” pairs that are currently not in service, in order to connect new customers or to replace existing customer lines.

## Bridged Taps

Bridged taps can be serious concerns for high speed data delivery, as they rob the line of precious bandwidth. The 3M™ Dynatel™ Triple Play Customer Service Test Set INS970 can detect the presence of a bridged tap, its length and distance from the unit, and quantify its impact in data rate loss.

Since the line is not terminated (vacant), two scenarios are presented to the technician, as it is not logically possible to determine which leg is the bridged tap and which leg belongs to the main path; example:

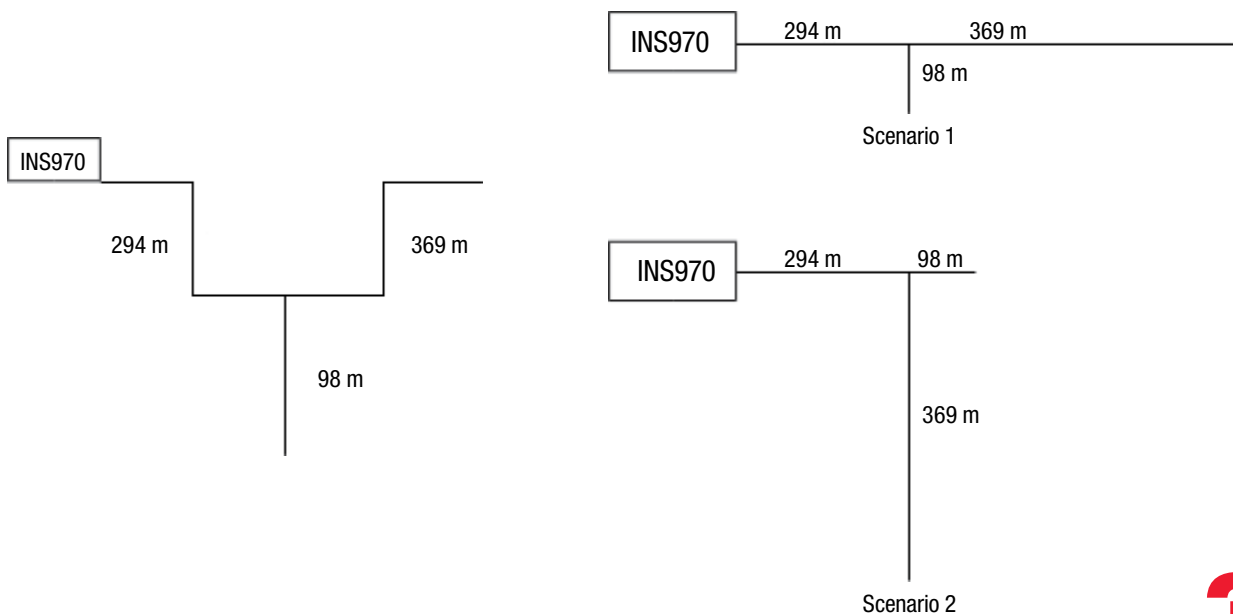


Each scenario is then analyzed and an estimate of the bridged taps rate reduction impact and the achievable data rate, based on the service selected (ADSL or VDSL2), is provided:

<div style="display: flex; justify-content: space-between; align-items: center;"> <span style="font-size: 24px; font-weight: bold;">P</span> <span style="font-weight: bold;">Single-ended Line Test</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px 5px; font-weight: bold;">123</span> </div> <div style="text-align: center; font-size: 12px; color: white;">Scenario1 Detail</div>	
Loop Length	663m
Distance to bridge tap	294m
BridgedTap Length	98m
<b>Data Rate estimate</b>	
Upstream	27216 kbps
Bridged Taps Reduction	5096 kbps
Downstream	66204 kbps
Bridged Taps Reduction	5216 kbps

<div style="display: flex; justify-content: space-between; align-items: center;"> <span style="font-size: 24px; font-weight: bold;">P</span> <span style="font-weight: bold;">Single-ended Line Test</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px 5px; font-weight: bold;">123</span> </div> <div style="text-align: center; font-size: 12px; color: white;">Scenario2 Detail</div>	
Loop Length	392m
Distance to bridge tap	294m
BridgedTap Length	369m
<b>Data Rate estimate</b>	
Upstream	46676 kbps
Bridged Taps Reduction	4116 kbps
Downstream	76280 kbps
Bridged Taps Reduction	7376 kbps



### Noise

Just like bridge taps, noise can really impair the ability of an otherwise good pair to deliver data at its best. The 3M™ Dynatel™ Triple Play Customer Service Test Set INS970 detects noise by scanning the entire active DSL spectrum (the spectrum used by the current connection) and then plotting it in a frequency based domain (Spectrum Analyzer).

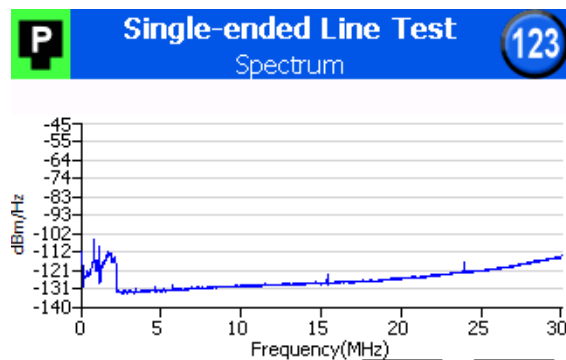

### Line Attenuation

Line attenuation is a graphical representation of the ability of a pair to conduct signals at different frequencies. Just like for the rate estimation, line attenuation plots are provided on a per-scenario basis.

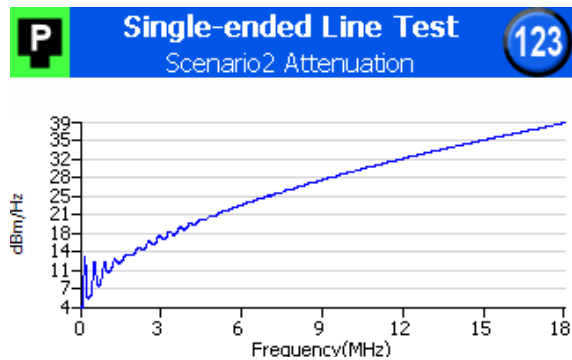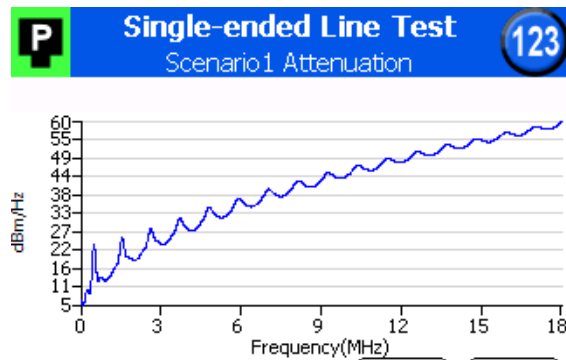

## 3M™ Dynatel™ Accessories

### DELT Diagnostics

Loop Analysis	Bridge tap and noise impairment on the line, noise/crosstalk disturbers
Attenuation Analysis	Line attenuation graph (30 MHz)
Spectrum Analysis	SELT and DELT (30 MHz) spectrum analyzer graphs

### Ordering Information

Product Number	Product Description	3M ID	UPC	Min. Order
INS970-ADV-OPTION	Advanced xDSL Diagnostics Software Option	CE100736632	0-00-51115-54366-1	1

3M and Dynatel are trademarks of 3M Company.

Note: Product specifications and descriptions in this document are subject to change.

### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

#### Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of 12 months from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether indirect, special, incidental or consequential regardless of the legal theory asserted.**



#### Communication Markets Division

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/426 8688  
Fax 800/626 0329  
www.3M.com/Telecom

Please recycle. Printed in USA.  
© 3M 2010. All rights reserved.  
80-6113-8329-2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

3M:

[7000132690](#) [7000132980](#)