

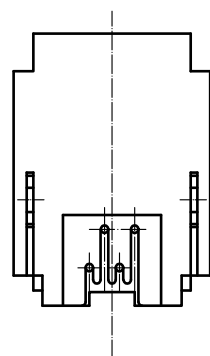
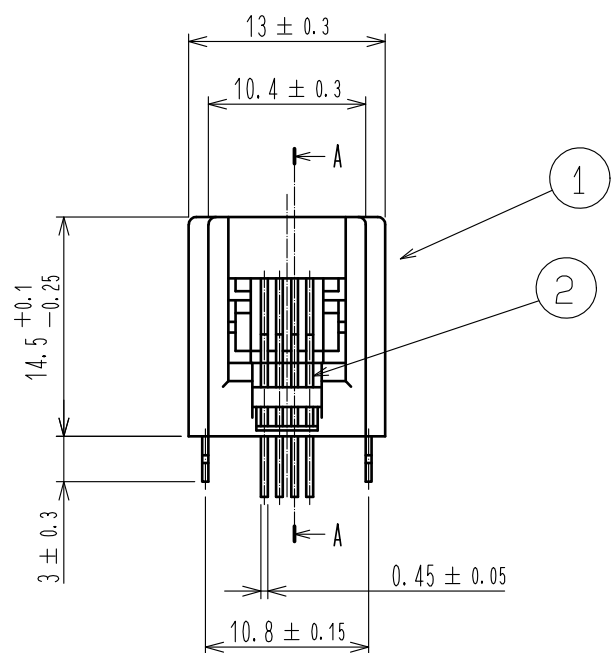
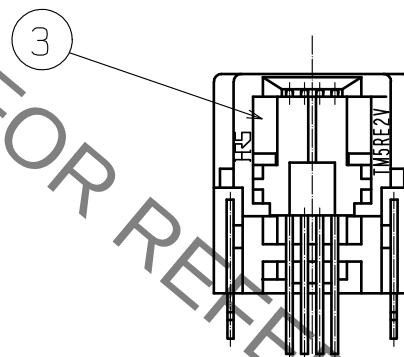



Jun.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

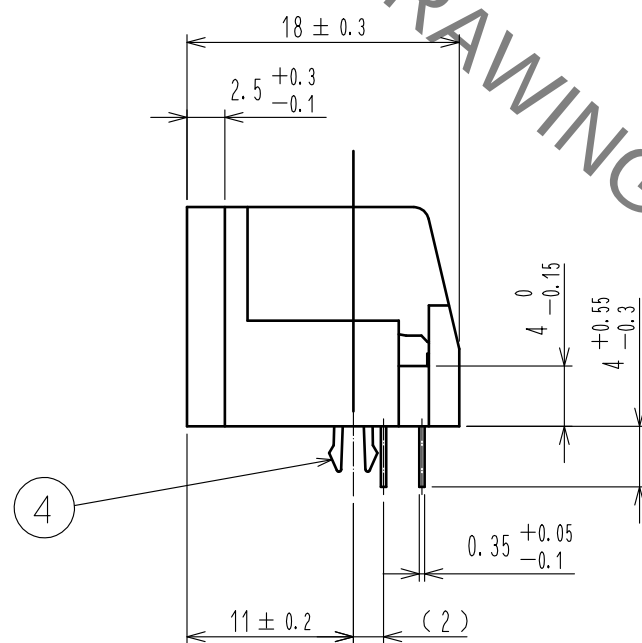

Contact mounting
A-A



1 PC board pattern

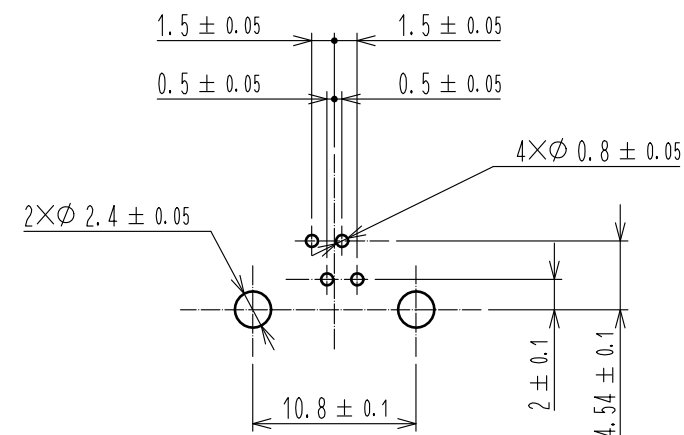

Notes 1 Dimensions are viewed from the connector mounting side on PCB.
2. PC board thickness 1.6mm.

2	Phosphor bronze	Contact area : Gold plating 0.4μm min. Lead : Gold plating 0.03μm min. Under : Nickel plating 1.27μm min.	4	Phosphor bronze	Tin plating 1μm min.		
1	PBT	Dark gray . UL94V-0	3	PBT	Black . UL94V-0		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	18.06.12	DRAWING NO.	EDC-041453-20-05		
		CHECKED : RI. TAKAYASU	18.06.12	PART NO.	TM5RE2V-44(20)		
		DESIGNED : MO. SHIMOYAMA	18.06.12	CODE NO.	CL222-2079-5-20		
		DRAWN : SJ. SATO	18.06.12	1			