



Mini-Circuits

HAND
FLEX™

Coaxial Cable

047-6SMP+

50Ω 6 inch DC to 18 GHz SMP-Female

THE BIG DEAL

- Wideband frequency coverage, DC to 18 GHz
- Low Loss, 0.57 dB at 18 GHz
- Excellent Return Loss, 22 dB at 18 GHz
- Hand formable to almost any custom shape without special bending tools
- 3.2mm bend radius for tight installations
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

Model No.	047-6SMP+
Case Style	BZ2551-6
Connectors	SMP-Female

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Replacement for custom bent 0.047" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

PRODUCT OVERVIEW

The 047 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems in tight spaces. The outer shield is tin plated copper braid and tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. The 047 Series Hand-Flex™ Cables features gold plated beryllium copper construction. The 047 Series Hand-Flex™ cables are available in variety of length to meet your requirements.

KEY FEATURES

Feature	Advantages
Hand-Formable RF Cables	The 047 Series Hand-Flex™ cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius, 3.2mm	Capable of only 3.2mm bend radius, the 047 Hand Flex series is able to make connections in tight spaces making these cables ideal for dense system integration
Excellent Return Loss, <ul style="list-style-type: none">• 31 dB at 6 GHz• 22 dB at 18 GHz	The 047 Series Hand-Flex™ Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.
Good Power Handling Capability: <ul style="list-style-type: none">• 22.5 W at 0.5 GHz• 4.50 W at 18 GHz	Mini-Circuits' 047 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path.
SMP-F blind Mate push-on/snap-on connector on one side	Quick connect/disconnect saving time.

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
ECO-016814
047-6SMP+
MCL NY
240311

PAGE 1 OF 4



Mini-Circuits

HAND
FLEX™

Coaxial Cable

047-6SMP+

50Ω 6 inch DC to 18 GHz SMP-Female

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC	-	18	GHz
Length ¹		6			inches
Insertion Loss	DC - 2	—	0.21	0.52	dB
	2 - 6	—	0.37	0.97	
	6 - 10	—	0.57	1.22	
	10 - 18	—	0.72	1.66	
Return Loss	DC - 2	20	30	—	dB
	2 - 6	20	28	—	
	6 - 10	17	32	—	
	10 - 18	17	27	—	

1. Custom sizes available, consult factory.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-45°C to 85°C
Storage Temperature	-45°C to 85°C
Power Handling at +25°C, Sea Level	22.5 W at 0.5 GHz
	15.5W at 1 GHz
	11W at 2 GHz
	5.5W at 6 GHz
	4.6W at 10 GHz
	4.5W at 18 GHz

Permanent damage may occur if any of these limits are exceeded.





Mini-Circuits


HAND
FLEX™

Coaxial Cable


047-6SMP+

50Ω 6 inch DC to 18 GHz SMP-Female

CABLE CONSTRUCTION

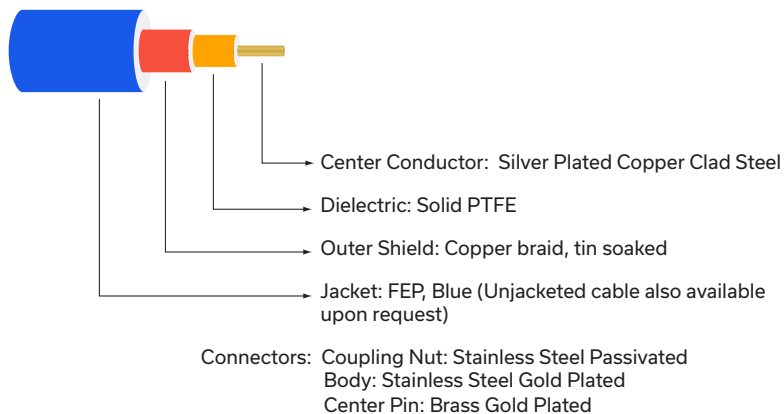

OUTLINE DRAWING

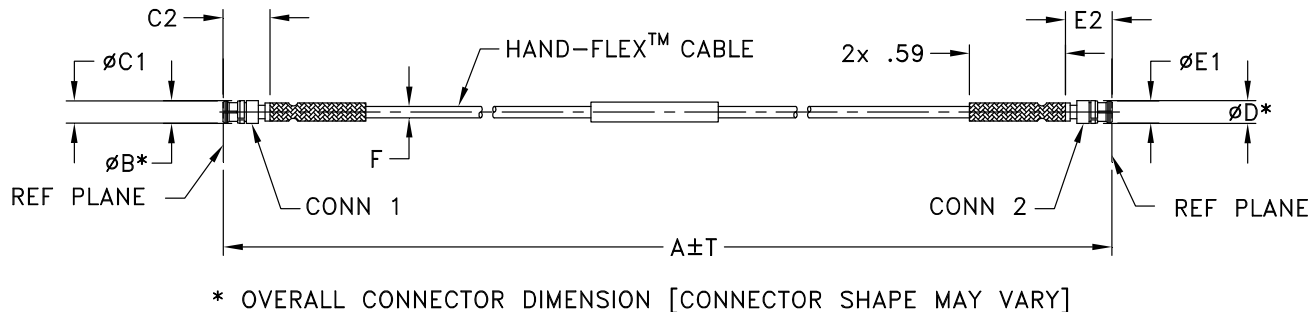

OUTLINE DIMENSIONS

A	B	C1	C2	D	E1	E2	F	T	wt grams
6.0	.14	.135	.287	.14	.135	.289	.069	0.05	2.24
152.40	3.56	3.43	7.29	3.56	3.43	7.34	1.75	1.27	





Mini-Circuits

HAND
FLEX™



Coaxial Cable

047-6SMP+

50Ω 6 inch DC to 18 GHz SMP-Female

TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		SMP-Female	SMP-Female
100	0.06	35.1	34.6
1000	0.21	26.3	26.1
2000	0.31	32.8	31.0
2500	0.33	26.8	26.5
4000	0.42	30.7	28.7
5000	0.44	25.6	22.4
6000	0.52	33.2	31.6
7000	0.56	29.7	29.1
8000	0.61	28.4	31.9
9000	0.64	60.7	31.0
10000	0.65	29.1	26.3
12000	0.61	22.1	25.7
14000	0.70	29.3	31.2
17000	0.88	24.7	23.1
18000	0.57	22.9	25.0

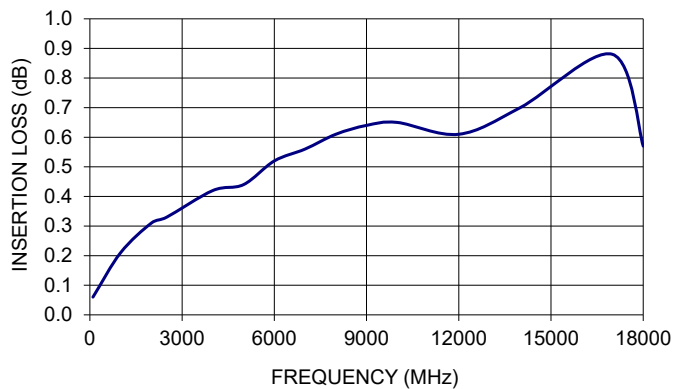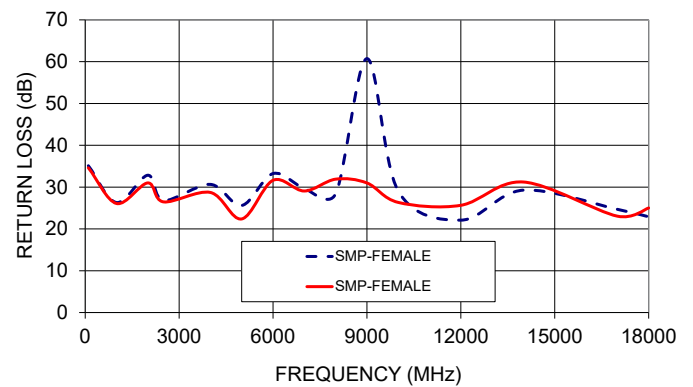047-6SMP+
INSERTION LOSS047-6SMP+
RETURN LOSS

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[047-6SMP+](#)