



Mini-Circuits

HAND  
FLEX™

# Coaxial Cable

086-6SBMMCR+

50Ω 6 inch DC to 6 GHz SMA-Female Bulkhead to Right Angle MMCX-Male

## THE BIG DEAL

- Wideband frequency coverage, DC to 6 GHz
- Low Loss, 0.37 dB at 6 GHz
- Excellent Return Loss, 18 dB at 6 GHz
- Hand formable to almost any custom shape without special bending tools
- 6mm bend radius for tight installations
- Insulated outer jacket standard<sup>1</sup>
- Connector interface, meets MIL-STD-348
- Ideal for interconnect of assembled systems



Generic photo used for illustration purposes only

Model No.	086-6SBMMCR+
Case Style	KP2016-6
Connectors	SMA-Female Bulkhead to Right Angle MMCX-Male

## +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## APPLICATIONS

- Replacement for custom bent 0.086" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

## PRODUCT OVERVIEW

The 086 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems in tight spaces. The construction includes a silver-plated copper steel wire center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. SMA-F connector have passivated stainless steel coupling nut over a gold plated connector body and Beryllium copper over a gold plated center contact. MMCX-M connector has gold plated, brass body and center conductor. The 086 Series hand-Flex cables are available in variety of length to meet your requirements.

## KEY FEATURES

Feature	Advantages
Hand-Formable RF Cables	The 086 Series Hand-Flex™ cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies.
Tight Bend Radius	Capable of only 6 mm bend radius, the 086 Hand-Flex™ series is able to make connections in tight spaces making these cables ideal for dense system integration
SMA-F bulkhead connector at one end	Mounts directly on equipment racks eliminating need for bulkhead adapter, thereby improving reliability
MMCX-M blind Mate Right angle push-on/snap-on	Quick connect/disconnect snap-on mating reduces installation time
Excellent Return loss, <ul style="list-style-type: none"><li>• 22 dB typ. at 3 GHz</li><li>• 18 dB typ. at 6 GHz</li></ul>	The 086 Series Hand-Flex Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A  
ECO-017668  
086-6SBMMCR+  
MCL NY  
240315

PAGE 1 OF 4



Mini-Circuits

HAND  
FLEX™

# Coaxial Cable

086-6SBMMCR+

50Ω 6 inch DC to 6 GHz SMA-Female Bulkhead to Right Angle MMCX-Male

## ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		6	GHz
Length <sup>1</sup>			6		inches
Insertion Loss	DC - 2	—	0.1	0.4	dB
	2 - 4	—	0.3	0.7	
	4 - 6	—	0.3	0.7	
Return Loss	DC - 2	17	38	—	dB
	2 - 4	17	25	—	
	4 - 6	17	21	—	

1. Custom sizes available, consult factory.

## ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to +105°C
Storage Temperature	-55°C to +105°C
Power Handling at +25°C, Sea Level	50 W at 2 GHz

Permanent damage may occur if any of these limits are exceeded.





Mini-Circuits

**HAND  
FLEX™**

# Coaxial Cable

**086-6SBMMCR+**

50Ω 6 inch DC to 6 GHz SMA-Female Bulkhead to Right Angle MMCX-Male

## CABLE CONSTRUCTION




- Center Conductor: Silver Plated Copper Clad Steel
- Dielectric: Solid PTFE
- Outer Shield: Copper Braid, Tin Soaked
- Jacket: FEP, Blue (Unjacketed cable also available upon request)

SMA-F Bulkhead Connector: Hex Nut: Stainless Steel Gold Plated Body: Stainless Steel Gold Plated Socket: BeCu, Gold Plated

MMCX-Male Connector: Body: Brass, Gold Plated Center Pin: Brass, Gold Plated

## OUTLINE DRAWING

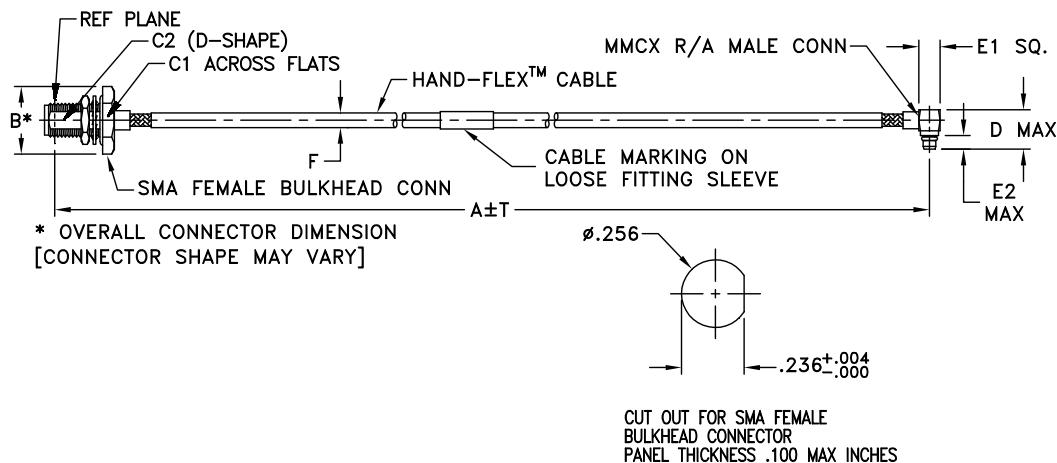

## OUTLINE DIMENSIONS ( $\frac{\text{Inch}}{\text{mm}}$ )

A	B	C1	C2	D	E1	E2	F	T	wt
6.0	.51	.433	.232	.30	.158	.138	.108	0.05	grams
152.40	12.95	11.00	5.89	7.62	4.01	3.51	2.75	1.27	6.86





Mini-Circuits

HAND  
FLEX™



# Coaxial Cable

086-6SBMMCR+

50Ω 6 inch DC to 6 GHz SMA-Female Bulkhead- Right Angle MMCX-Male

## TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	
		SMA-Female Bulkhead	Right Angle MMCX-Male
10	0.01	50.58	57.16
100	0.04	43.17	49.04
500	0.1	38.55	36.12
1000	0.15	31.19	30.5
1500	0.19	28.43	27.04
2000	0.21	32.75	27.64
2500	0.25	24.15	22.82
3000	0.27	22.72	23.14
3500	0.26	27.29	29.17
4000	0.29	23.11	24.69
4500	0.32	19.84	21.7
5000	0.33	20.91	22.22
5500	0.34	20.66	21.51
6000	0.37	18.89	18.62

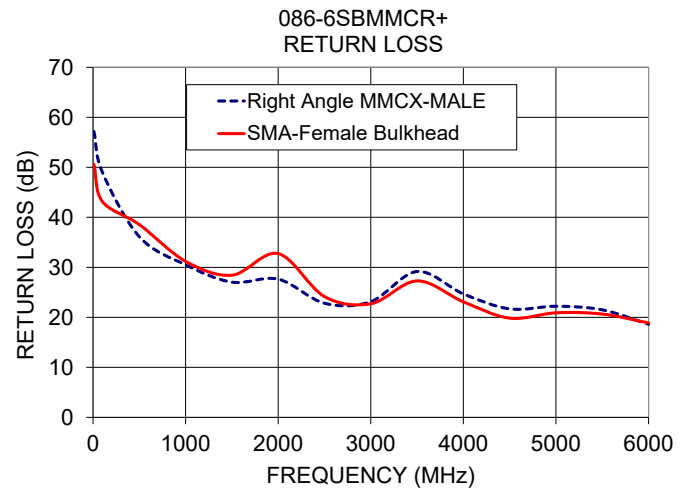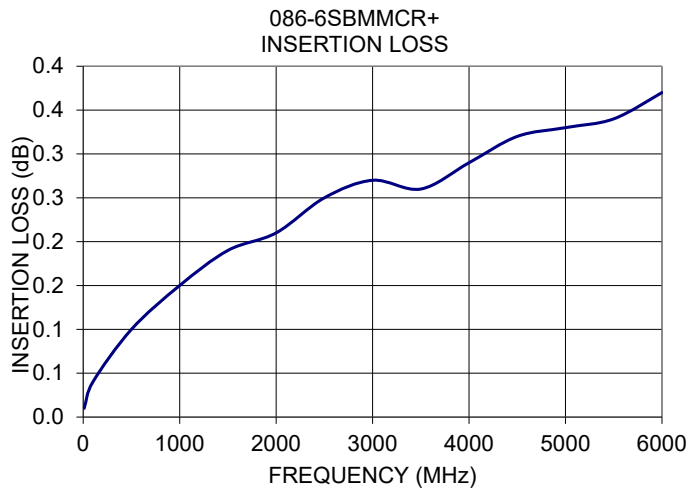

### NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[086-6SBMMCR+](#)