



### THE BIG DEAL

- Standard small 1008 (2.5mm x 2.0mm) case style
- Low Insertion Loss – Mid band 1.5 dB typical
- Shielded construction preventing filter from de-tuning
- Reduced footprint area by employing LGA (land grid array)
- Surface mountable pick and place standard case style
- Patent pending



Generic photo used for illustration purposes only

CASE STYLE: NL1008C-6

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### APPLICATIONS

- Test and Measurement

### PRODUCT OVERVIEW

The BFCQ-2702+ LTCC Band Pass Filter achieves a miniature size and high repeatability of performance by utilizing a proprietary LTCC material system and distributed filter topology. The typical passband loss at 22.0 – 31.0 GHz is as low as 1.5 dB, with typical stopband rejections at 43 dB up to 48 GHz. This model handles up to 1W RF input power, and provides a wide operating temperature range from -55 to +125°C. Utilizing a proprietary LTCC material system and a distributed filter topology, this filter is able to achieve repeatable performance on a lot-to-lot basis.

### KEY FEATURES

Feature	Advantages
Cost effective	LTCC is scalable technology that is cost effective due to ease of production in high quantities.
Small size (2.5mm x 2.0mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Surface Mountable	Suitable for very high volume automated assembly process.



CERAMIC

# Bandpass Filter

**BFCQ-2702+****ELECTRICAL SPECIFICATIONS<sup>1</sup> AT 25°C**

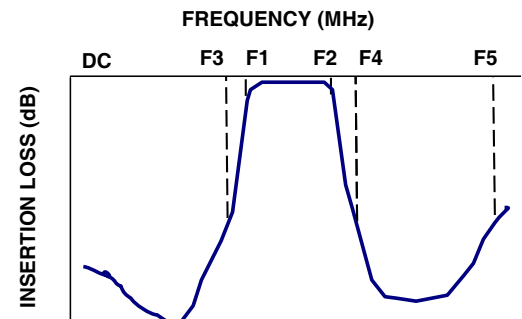
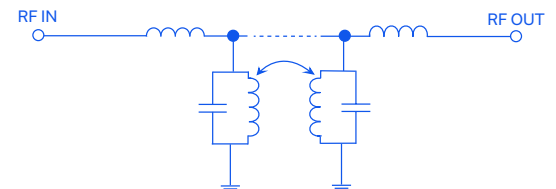
Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	—	—	—	26.1	—	GHz
	Insertion Loss	F1-F2	22 – 31	—	1.5	2.75	dB
	Return Loss	F1-F2	22 – 31	—	11	—	dB
Stop Band, Lower	Insertion Loss	DC-F3	0.1 – 14	32	42	—	dB
			14 – 17.1	20	27	—	
Stop Band, Upper	Insertion Loss	F4-F5	35.7 – 38	20	43	—	dB
			38 – 48	33	43	—	

1. Measured on Mini-Circuits Test Board TB-BFCQ-2702C+ with connectors and feedlines de-embedded.

**MAXIMUM RATINGS**

Parameter	Ratings
Operating temperature	-55°C to +125°C
Storage temperature	-55°C to +125°C
RF Power Input	1W

Permanent damage may occur if any of these limits are exceeded.

**TYPICAL FREQUENCY RESPONSE****FUNCTIONAL SCHEMATIC**



Mini-Circuits®

CERAMIC

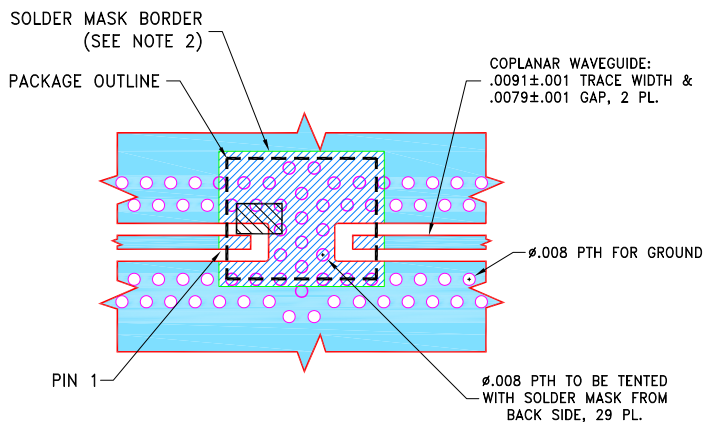
## Bandpass Filter

BFCQ-2702+

## PAD CONNECTIONS



INPUT	1
OUTPUT	2
GROUND	3

PRODUCT MARKING: UN

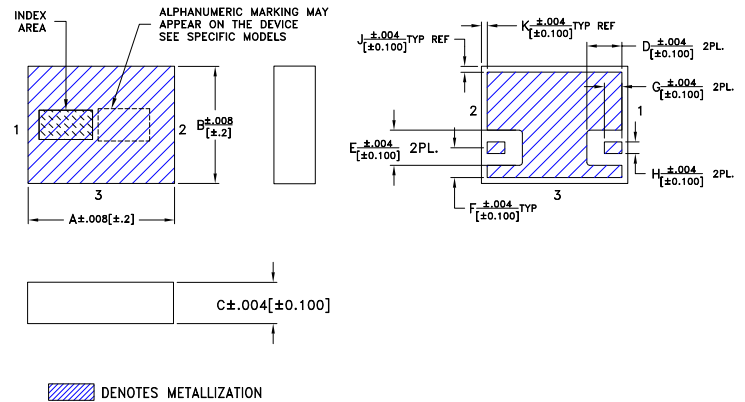
DEMO BOARD MCL P/N: TB-BFCQ-2702C+  
SUGGESTED PCB LAYOUT (PL-707)

## NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR MEGTRON-7 R5785(N); DIELECTRIC THICKNESS: .0049±.001; CLOTH STYLE: 2116; COPPER: HVLP/HVLP. FOR OTHER MATERIALS LINE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. SOLDER MASK OPENING FOR COMPONENT SOLDERING HAS BEEN INCREASED AGAINST PCB LAND PATTERN RECOMMENDATIONS PER NL1008C-6 AND CAN BE DEVIATED FROM THIS DRAWING TO COMPLY WITH CUSTOMERS' DESIGN RULES.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

## OUTLINE DRAWING

OUTLINE DIMENSIONS (Inches)  
mm

A	B	C	D	E	F	G	H	J	K	wt
.098	.079	.028	.024	.024	.020	.012	.008	.004	.004	grams
2.49	2.01	0.71	0.6	0.6	0.51	0.3	0.2	0.1	0.1	.019

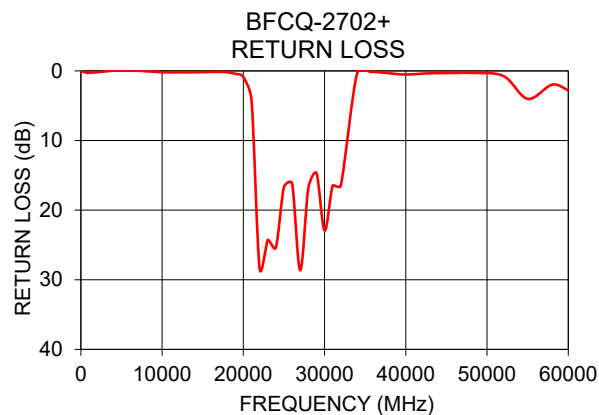
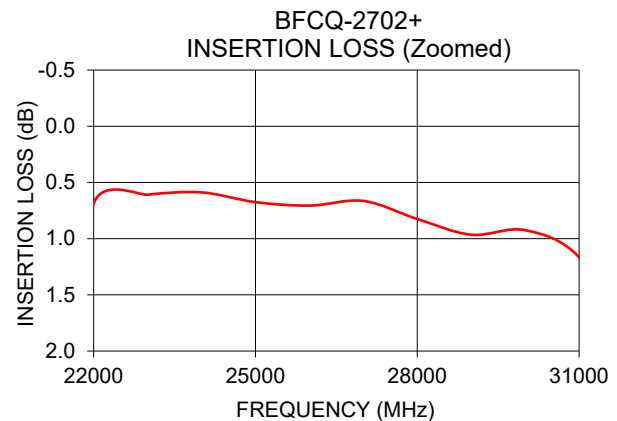
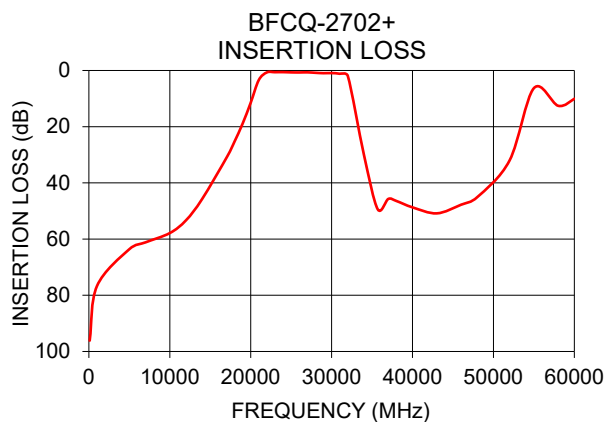


CERAMIC

# Bandpass Filter

**BFCQ-2702+****TYPICAL PERFORMANCE DATA AT 25°C**

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
100	96.13	0.06
1000	76.71	0.26
5000	63.60	-0.11
10000	57.87	0.20
14000	45.73	0.20
17100	30.59	0.14
22000	0.69	28.36
26000	0.71	16.17
28000	0.83	16.80
31000	1.17	16.47
32000	1.93	16.47
35700	49.40	0.14
37000	45.72	0.23
38000	46.43	0.34
40000	48.71	0.52
46000	47.77	0.30
48000	45.07	0.29

**NOTES**

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BFCQ-2702+](#)