

The Big Deal

- Innovative and industry leading
- 5G n260 bandpass filter
- Low Insertion Loss – Mid band 2.5dB typical
- Surface mountable pick and place standard case style
- Small size 2.5mm x 2.0mm
- High quality distributed filter topology
- Wide rejection band



CASE STYLE: NL1008C-6

Product Overview

The BFCQ-3852A+ LTCC Bandpass Filter covers the 5G n260 band. This corresponds to a passband of 37 to 40 GHz, with as low as 2.5dB passband loss, and up to 40dB stopband rejection. This model handles up to 1W RF input power and provides a wide operating temperature range from -55 to +125°C. Utilizing a proprietary LTCC material system and a distributed filter topology, this filter is able to achieve repeatable performance on a lot-to-lot basis, up to mmWave frequencies.

Key Features

Feature	Advantages
5G n260 band compatible	Designed for 5G Telecommunications, n260 band, 37 – 40 GHz
Proprietary mmWave compatible LTCC material system	Low loss and repeatable performance on a lot-to-lot basis up to mmWave frequencies.
Cost effective	LTCC is scalable technology that allows for cost reduction at volume.
Small size (2.5mm x 2.0mm)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Surface Mountable	Suitable for very high volume automated assembly process.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Ceramic Bandpass Filter

50Ω 37 to 40 GHz

BFCQ-3852A+



Generic photo used for illustration purposes only

CASE STYLE: NL1008C-6


Features

- Standard miniature 1008 package case style
- 5G n260 band compatible
- Shielded construction preventing filter from de-tuning
- Reduced footprint area by employing LGA (land grid array)
- Suited for very high-volume production
- Surface mountable

Applications

- 5G Telecommunications

Functional Schematic

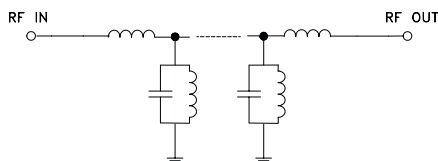

Electrical Specifications¹ at 25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	38.5	—	GHz
	Insertion Loss	F1-F2	37 - 38.6	2.9	—	dB
	Return Loss (In)	F1-F2	38.6 - 40	2.5	3.4	dB
	Return Loss (Out)	F1-F2	37 - 40	10	—	dB
Stop Band, Lower	Insertion Loss	DC-F3	0.1 - 28	45	55	dB
Stop Band, Upper	Insertion Loss	F4-F5	28 - 33.2	30	45	dB
		F4-F5	44.8 - 47	20	25	dB
		F4-F5	47 - 54	30	36	dB
Stop Band, Upper	Insertion Loss	F4-F5	54 - 58	20	30	dB

1. Measured on Mini-Circuits Test Board TB-BFCQ-3852AC+ with feedline losses removed by normalization of S12 and S21 traces to measurement of TB thru-line.

Maximum Ratings





Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input	1W

Permanent damage may occur if any of these limits exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	85.26	0.05
5000	70.51	0.38
10000	64.52	0.57
20000	73.53	0.88
25000	75.86	1.30
30000	60.17	1.15
34000	51.82	1.82
37000	2.10	13.39
38500	1.60	13.18
40000	1.61	14.39
45000	36.70	1.57
45000	36.70	1.57
50000	48.91	1.59
58000	36.29	2.03
60000	31.74	2.27

Typical Frequency Response

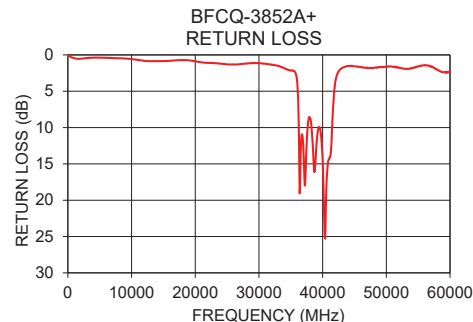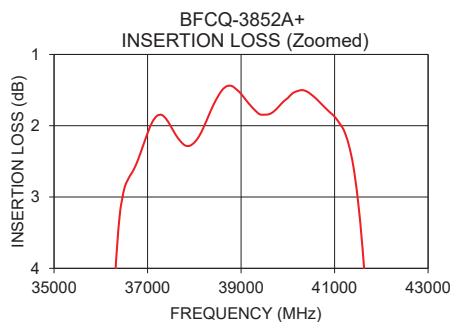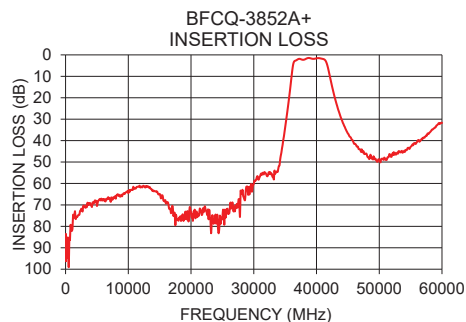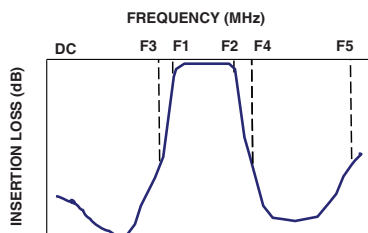

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. OR
ECO-007929
BFCQ3852A+
DL/CP
210614
Page 2 of 3

Pad Connections

INPUT	1
OUTPUT	2
GROUND	3

Product Marking: NS


Evaluation Board MCL P/N: TB-BFCQ-3852AC+
Suggested PCB Layout (PL-707)

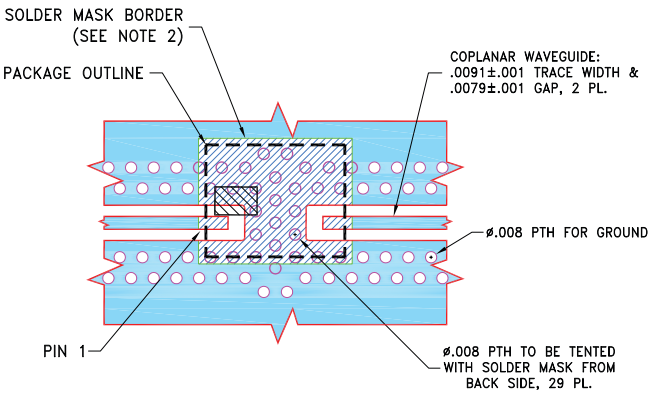

- NOTES:
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR MEGTRON-7 R5785(N); DIELECTRIC THICKNESS: .0049±.001; CLOTH STYLE: Z116; COPPER: HVLP/HVLP. FOR OTHER MATERIALS LINE WIDTH & GAP MAY NEED TO BE MODIFIED.
 2. SOLDER MASK OPENING FOR COMPONENT SOLDERING HAS BEEN INCREASED AGAINST PCB LAND PATTERN RECOMMENDATIONS PER NL1008C-6 AND CAN BE DEVIATED FROM THIS DRAWING TO COMPLY WITH CUSTOMERS' DESIGN RULES.
 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Outline Drawing

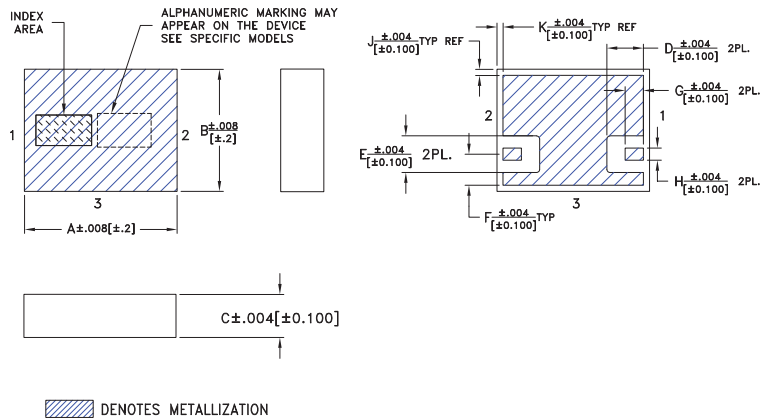

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	wt
.098	.079	.028	.024	.024	.020	.012	.008	.004	.004	grams
2.49	2.01	0.71	0.6	0.6	0.51	0.3	0.2	0.1	0.1	.019

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BFCQ-3852A+](#)