


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

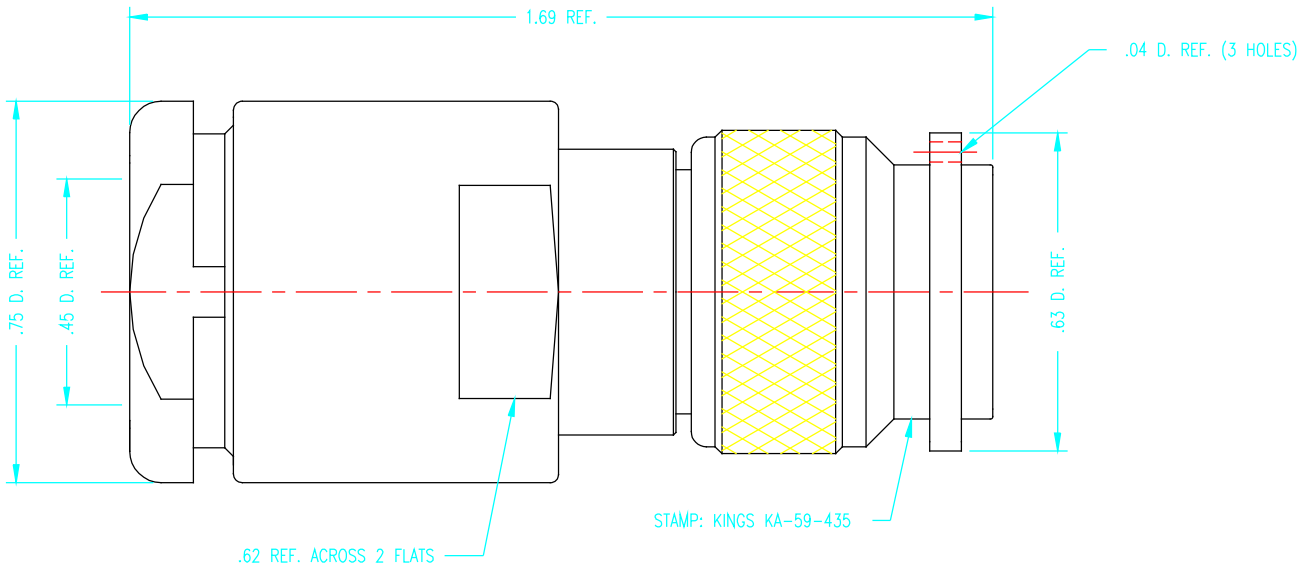

- NOTES:
1. FOR USE WITH RG-214 & 9/U CABLE.
 2. FOR CABLING INSTRUCTIONS SEE CP-230A.
 3. FOR CRIMPING USE DIE KTH-2004
 4. INTERFACE PER MIL-STD-348, FIG. 313-1.
 5. MARKING PACKAGE: 30-085-3
KINGS KA-59-435
XXXX (DATE CODE)
 6. MATERIALS:
INSULATORS: PTFE, ASTM-D-4894
K-GRIP SLEEVE: COMMERCIAL BRONZE, ASTM-B-135
GASKETS: SILICONE RUBBER, ZZ-R-765
OUTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
 7. FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
 8. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz

GSD

KA-59-435

REVISIONS	
ISSUE	CHANGES
1	CN 37201 A REDRAWN KH 11/25/96
C	UPDATED NOTES 1 & 6 ER062813 JI 04/27/16
D	UPDATED REF ER063704 JI 07/15/16

KAM6875

SCALE	4:1
APPROX SURFACE AREA	
USED ON	
REF: BELL HELICOPTER 30-085-3 REV. J	
PLUG, TNC	
DRAWN KH	DATE 11/25/96
DESIGN PB	DATE 1126/96
APPR.	DATE
KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
KA-59-435	

GSD