

# Surface Mount Coaxial-Ceramic Resonator Filters and Multiplexers

50Ω DC to 6 GHz

## The Big Deal

- Low insertion loss with excellent power handling
- Passbands up to 6 GHz
- Fractional bandwidth from <1 to 25%
- Low profile designs with min. height of 0.120"
- Excellent temperature stability
- Rugged construction to handle demanding environmental conditions



## Product Overview

Mini-Circuits' *Coaxial-Ceramic Resonator filters* offer low insertion loss in very small form factors, using ceramic material with high dielectric constant and superior Q factor. Bandpass and bandstop filters, diplexer and multiplexer designs can be constructed using this technology. Low insertion loss combined with excellent power handling makes these filters well suited for transmitter and receiver signal chains. Advanced filter design and construction can achieve stopband width greater than 3x the center frequency as high as 20 GHz.

All our coaxial-ceramic resonator filters are built with rugged construction, qualified to withstand multiple demanding reflow cycles. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in signal chain
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stop band	Wide spur-free stopband results in better receiver sensitivity
Excellent power handling	Well suited for transmitter applications
Rugged Construction	These filter assemblies have been qualified over a wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles
Small Size	Very well suited for high performance applications where size is a constraint.
Temperature stability	Very minimal change in electrical performance across temperature makes these filters suitable for a wide range of operating conditions.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Bandpass Filter

50Ω 1200 to 1400 MHz

## CBP2-1300BV+



Generic photo used for illustration purposes only  
CASE STYLE: WA3176-1

### Features

- Good Insertion loss, 2.1dB typ.
- Excellent Rejection, 55dB typ.
- Wide Stop band Rejection, 15\*fc
- Low-profile shielded package

### Applications

- Defense/Military
- Telecommunications & Broadband wireless

### Electrical Specifications<sup>1</sup> at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	-	-	-	1300	-	MHz
	Insertion Loss	F1-F2	1200 - 1400	-	2.1	3	dB
	VSWR	F1-F2	1200 - 1400	-	1.39	1.92	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC - 1000	55	65	-	dB
		F3-F4	1000 - 1090	20	27	-	dB
Stop Band, Upper	Insertion Loss	F5-F6	1515 - 1680	20	28	-	dB
		F6-F7	1680 - 3900	-	35	-	dB
		F7-F8	3900 - 20000	-	20	-	dB

1. Measured on Mini-Circuits Characterization Test Board TB-CBP2-1300BV+

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	6 W at 25°C


Permanent damage may occur if any of these limits are exceeded.

\*Passband rating


### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (ns)
10	86.71	607.62	1200	6.80
54	98.37	814.43	1210	6.46
104	106.16	1026.70	1220	6.19
500	76.00	357.37	1230	5.99
1000	62.74	60.46	1240	5.81
1090	28.91	23.58	1250	5.65
1108	20.24	15.01	1260	5.52
1152	3.03	1.41	1270	5.42
1200	2.01	1.16	1280	5.37
1250	1.80	1.25	1290	5.35
1300	1.66	1.07	1300	5.35
1350	1.74	1.28	1310	5.34
1400	1.96	1.22	1320	5.34
1428	3.08	1.86	1330	5.34
1484	20.49	29.63	1340	5.38
1515	29.39	48.03	1350	5.46
1680	67.40	81.00	1360	5.60
3900	57.75	7.45	1370	5.78
5000	56.80	7.61	1380	6.01
20000	33.42	2.54	1400	6.73

### Functional Schematic




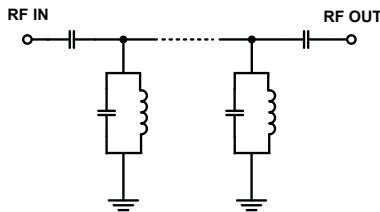


### Typical Frequency Response



#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

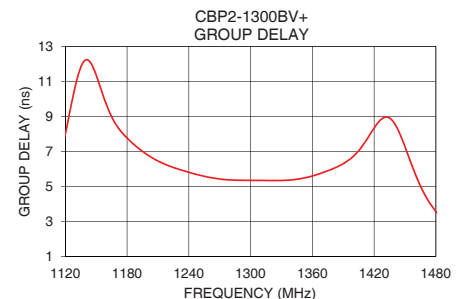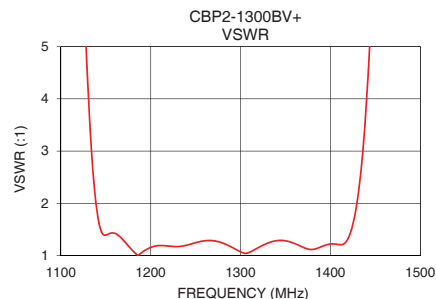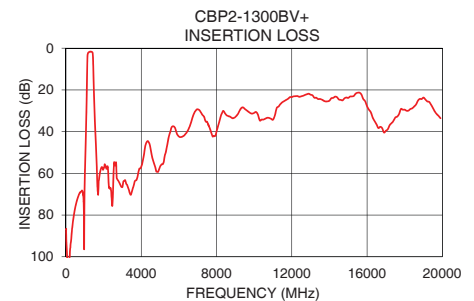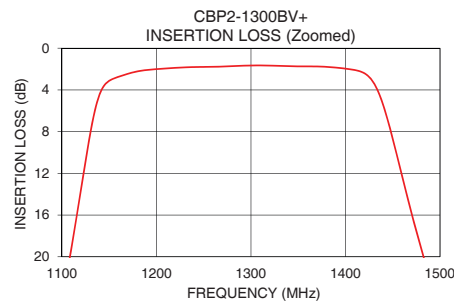

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp)




Pad Connections

INPUT	12
OUTPUT	7
GROUND	1,2,3,4,5,6,8,9,10,11,13,14

Demo Board MCL P/N: TB-CPB2-1300BV+  
Suggested PCB Layout (PL-722)


SUGGESTED MOUNTING CONFIGURATION FOR  
WA3176-1 CASE STYLE

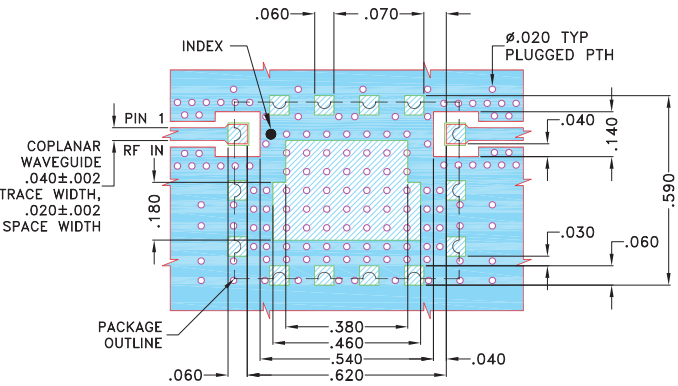

- NOTES:
1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS .020±.0015. COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC  
(SOLDER MASK OVER BARE COPPER)
- ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

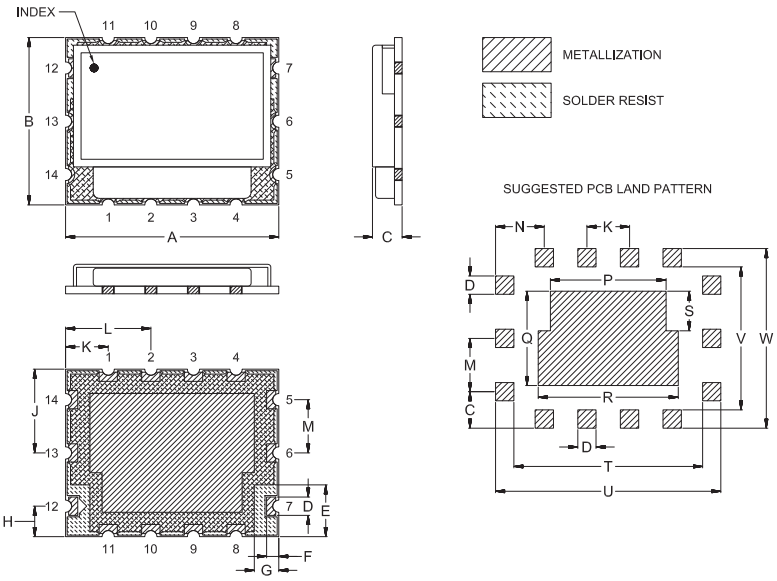

Outline Dimensions ( inch mm )

A	B	C	D	E	F	G	H	J	K	L	M
.700	.550	.120	.060	.170	.040	.080	.100	.275	.140	.280	.175
17.78	13.97	3.05	1.52	4.32	1.02	2.03	2.54	6.99	3.56	7.11	4.45
N	P	Q	R	S	T	U	V	W	Wt.		
.160	.380	.310	.460	.130	.620	.740	.470	.590	grams		
4.06	9.65	7.87	11.68	3.30	15.75	18.80	11.94	14.99	1.3		

Note: Please refer to case style drawing for details

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[CBP2-1300BV+](#)