


DASH NO.	M CODE	MADE FROM
----------	--------	-----------


GSD

KC-79-59

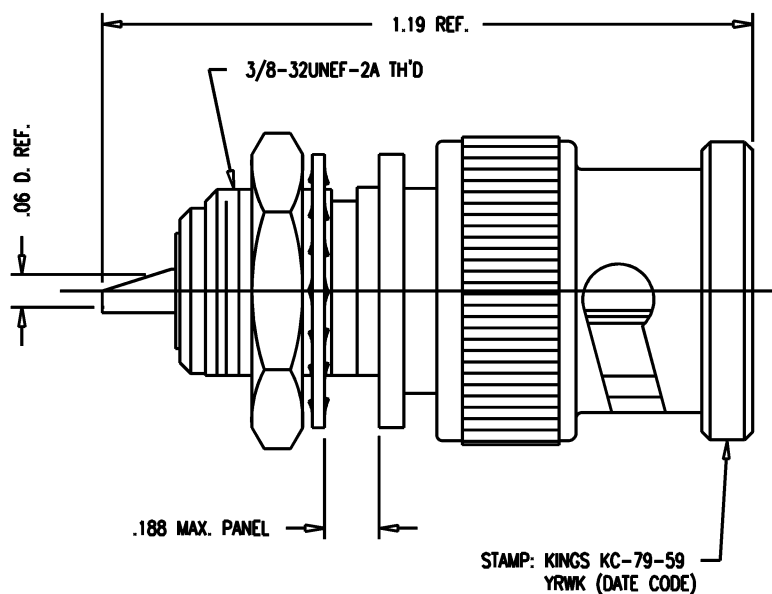

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 301-1.
2. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., ZZ-R-765
LOCKWASHER: PHOSPHOR BRONZE, QQ-B-750
SPRING WASHER: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16
3. FINISHES:
CONTACT } SILVER PLATE PER QQ-S-365
SPRING WASHER }
ALL METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz



MOUNTING HOLE

REVISIONS

ISSUE	CHANGES
5	CN 33610 E REDRAWN JCA 12/20/91
6	CN 38430 C TML 10/30/01

WAS:
JCA2329

KC-79-59S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

RECEPTACLE, BULKHEAD, BNC, M

DRAWN JCA	DATE 12/20/91
DESIGN MJB	DATE 12/20/91
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KC-79-59

GSD