

# Surface Mount Coaxial-Ceramic Resonator Filters and Multiplexers

50Ω DC to 6 GHz

## The Big Deal

- Low insertion loss with excellent power handling
- Passbands up to 6 GHz
- Fractional bandwidth from <1 to 25%
- Low profile designs with min. height of 0.120"
- Excellent temperature stability
- Rugged construction to handle demanding environmental conditions



## Product Overview

Mini-Circuits' *Coaxial-Ceramic Resonator filters* offer low insertion loss in very small form factors, using ceramic material with high dielectric constant and superior Q factor. Bandpass and bandstop filters, diplexer and multiplexer designs can be constructed using this technology. Low insertion loss combined with excellent power handling makes these filters well suited for transmitter and receiver signal chains. Advanced filter design and construction can achieve stopband width greater than 3x the center frequency as high as 20 GHz.

All our coaxial-ceramic resonator filters are built with rugged construction, qualified to withstand multiple demanding reflow cycles. Excellent repeatability across units is achieved through precise tuning and process control.

## Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in signal chain
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stop band	Wide spur-free stopband results in better receiver sensitivity
Excellent power handling	Well suited for transmitter applications
Rugged Construction	These filter assemblies have been qualified over a wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles
Small Size	Very well suited for high performance applications where size is a constraint.
Temperature stability	Very minimal change in electrical performance across temperature makes these filters suitable for a wide range of operating conditions.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Bandpass Filter

50Ω 1427 to 1525 MHz

## CBP-1476BD+



Generic photo used for illustration purposes only  
CASE STYLE: LW1611-1

### Features

- Low-profile shielded package
- Good VSWR, 1.38:1 typical in passband
- High rejection, 55 dB typ.
- Fast roll-off

### Applications

- Aeronautical radio navigation
- Aviation
- Transmitter/Receiver
- Digital audio broadcasting

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	-	-	1476	-	MHz
	Insertion Loss	F1-F2	-	2.6	3.5	dB
	VSWR	F1-F2	-	1.38	1.67	:1
Stop Band, Lower	Insertion Loss	DC-F3	60	70	-	dB
		F3-F4	20	26	-	dB
Stop Band, Upper	Insertion Loss	F5-F6	20	26	-	dB
		F6-F7	50	55	-	dB

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	5 W at 25°C

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

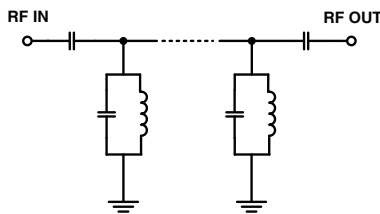

### Typical Frequency Response







### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (ns)
1	98.79	299.51	1427	9.09
10	110.07	434.30	1431	8.93
100	97.43	1085.74	1435	8.79
1100	68.11	78.26	1439	8.67
1250	67.42	43.77	1443	8.56
1331	33.22	17.64	1447	8.46
1340	28.36	14.34	1451	8.37
1407	3.04	1.45	1455	8.31
1427	2.46	1.29	1459	8.26
1451	2.14	1.06	1463	8.23
1476	2.08	1.08	1467	8.22
1501	2.20	1.18	1471	8.21
1525	2.58	1.03	1476	8.24
1535	3.11	1.20	1479	8.26
1590	28.08	22.95	1483	8.30
1600	32.82	28.54	1487	8.36
1680	69.26	58.40	1491	8.43
2000	56.32	86.00	1501	8.73
2300	56.08	89.09	1521	10.14
2500	56.28	78.61	1525	10.63

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

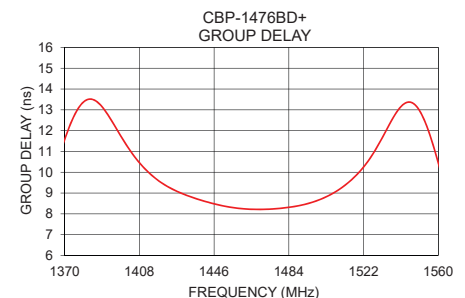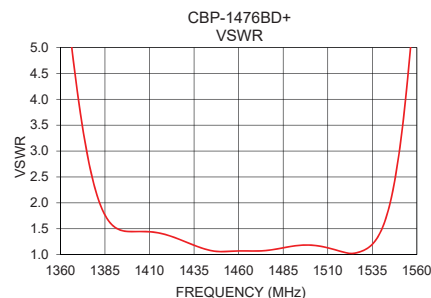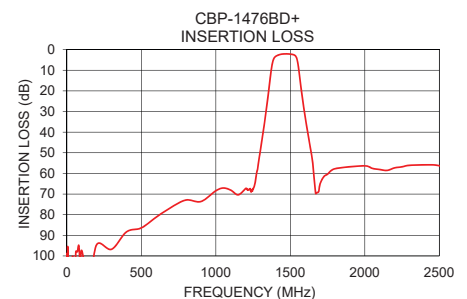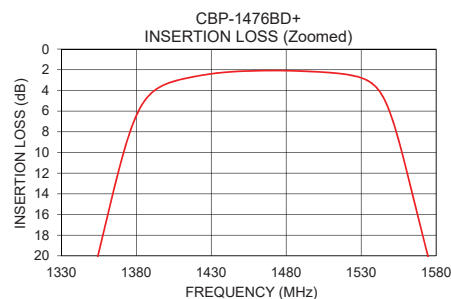

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)






[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Pad Connections


INPUT	1
OUTPUT	7
GROUND	2,3,4,5,6,8,9,10

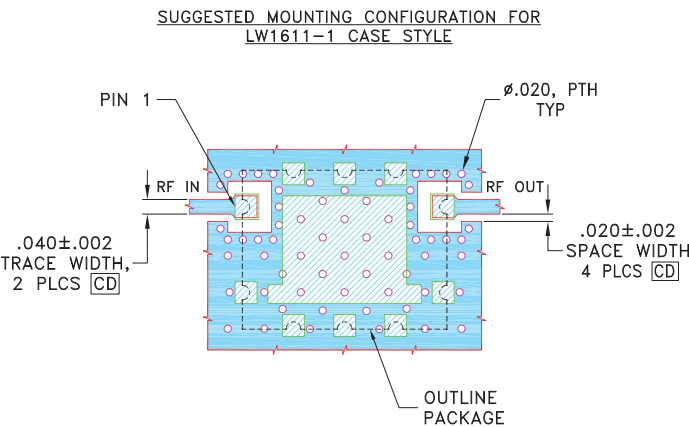Demo Board MCL P/N: TB-1100+  
Suggested PCB Layout (PL-634)



- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS (RO4350B) WITH DIELECTRIC THICKNESS .020"±.0015". COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

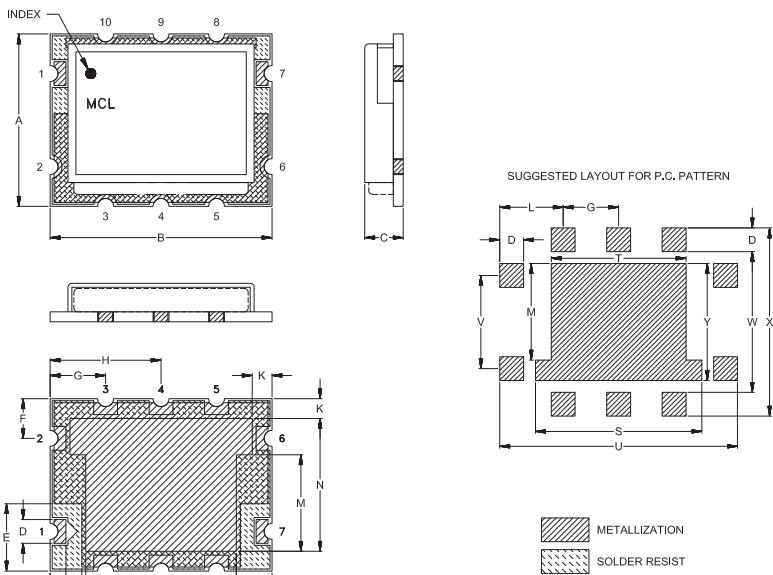

Outline Dimensions ( inch mm )

A	B	C	D	E	F	G	H	J	K	L	M
.435	.560	.120	.060	.170	.100	.140	.280	.040	.050	.160	.244
11.05	14.22	3.05	1.52	4.32	2.54	3.56	7.11	1.02	1.27	4.06	6.19
N	P	Q	R	S	T	U	V	W	X	Y	Wt.
.355	.080	.380	.090	.420	.340	.600	.235	.355	.475	.295	grams
8.51	2.03	9.65	2.29	10.67	8.64	15.24	5.97	9.02	12.07	7.49	1.0

Note: Please refer to case style drawing for details

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[CBP-1476BD+](#)