


# Surface Mount Bandpass Filter

## CBP-1645J+

50Ω 1622 to 1668 MHz

### The Big Deal

- Good Insertion Loss
- Low VSWR
- Miniature shielded package



Generic photo used for illustration purposes only  
CASE STYLE: MQ1770

### Product Overview

CBP-1645J+ is a ceramic coaxial resonator based bandpass filter in a shielded package fabricated using SMT technology. This filter has narrow passband and offers low insertion loss , low VSWR and high power handling for use in satellite communication.

### Key Features

Feature	Advantages
High Q	The CBP-1645J+ filter incorporates High-Q ceramic resonators that enables low insertion loss.
Low VSWR	This filter maintains typical VSWR over passband frequency range making this filter easier to integrate between other components.
Rugged construction	The CBP-1645J+ has been qualified over wide range of thermal, mechanical and environmental conditions including withstanding the stress of extensive solder reflow cycles.

#### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

50Ω 1622 to 1668 MHz

## CBP-1645J+



Generic photo used for illustration purposes only  
CASE STYLE: MQ1770

### Features

- Good Insertion loss
- Low VSWR
- Miniature shielded package

### Applications

- Satellite communication
- Radio astronomy

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	1645	—	MHz
	Insertion Loss	F1-F2	—	1.3	2.0	dB
	VSWR	F1-F2	—	1.5	2.32	:1
Stop Band, Lower	Insertion Loss	DC-F3	20	27.7	—	dB
	VSWR	DC-F3	—	20	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	20	27.1	—	dB
	VSWR	F4-F5	—	20	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	8 W

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

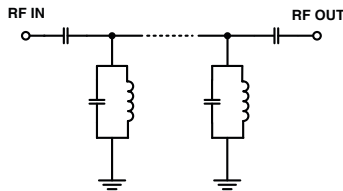

### Typical Frequency Response







### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	100.66	350.26	1622	6.93
100	110.58	593.87	1624	6.80
400	95.75	968.56	1626	6.69
800	75.52	395.09	1628	6.59
1000	67.99	232.74	1630	6.52
1515	30.50	52.78	1632	6.45
1520	29.15	49.53	1636	6.36
1548	20.30	30.47	1638	6.31
1548	20.30	30.47	1640	6.29
1590	3.64	3.32	1642	6.26
1622	1.17	1.26	1644	6.24
1645	1.02	1.11	1646	6.23
1668	1.15	1.19	1650	6.23
1692	3.45	3.45	1654	6.26
1765	20.25	58.70	1658	6.34
1820	27.76	97.31	1660	6.39
1850	30.93	107.47	1662	6.46
2200	65.71	118.55	1664	6.55
3000	37.22	111.45	1666	6.63
4000	38.32	58.17	1668	6.73

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

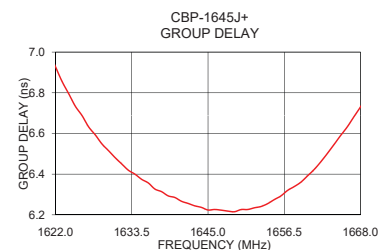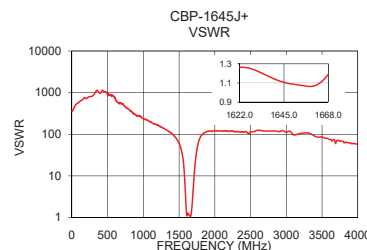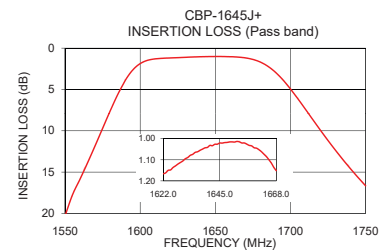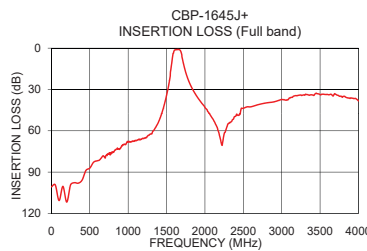

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

REV.A  
M174392  
CBP-1645J+  
EDU1737/1  
URJ  
200813  
Page 2 of 3



Pad Connections

INPUT	1
OUTPUT	9
GROUND	2,3,4,5,6,7,8,10,11

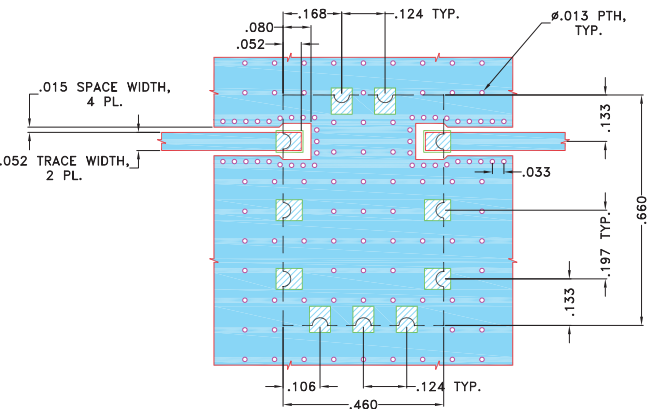
Demo Board MCL P/N: TB-692+  
Suggested PCB Layout (PL-375)



- NOTES:
- 1. TRACE WIDTH IS SHOWN FOR ROGERS (RO4350B) WITH DIELECTRIC THICKNESS .030"±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

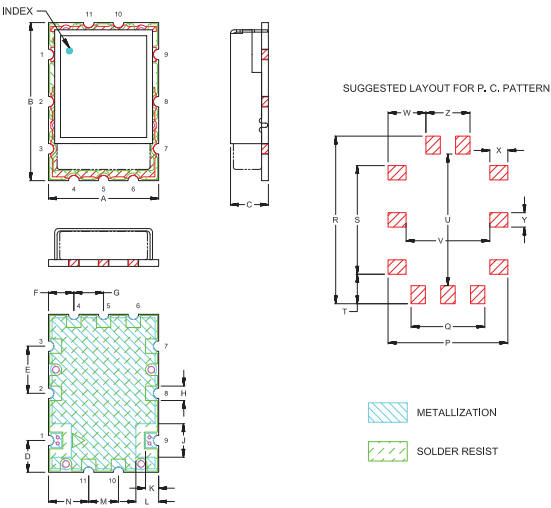

Outline Dimensions ( inch mm )

A	B	C	D	E	F	G	H	J	K	L	M	N
.460	.660	.175	.133	.197	.106	.124	.060	.140	.055	.095	.124	.168
11.68	16.76	4.45	3.38	5.00	2.69	3.15	1.52	3.56	1.40	2.41	3.15	4.27
P	Q	R	S	T	U	V	W	X	Y	Z	WT.GRAMS	
.500	.308	.700	.454	.123	.550	.350	.158	.075	.060	.184	1.8	
12.70	7.82	17.78	11.53	3.12	13.97	8.89	4.01	1.91	1.52	4.67		

Note: Please refer to case style drawing for details.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[CBP-1645J+](#)