

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.164 ohms ±10%
D.C. RESISTANCE	3-4 @20°C	0.164 ohms ±10%
INDUCTANCE	1-2 10kHz, 50mVAC, Ls	3.3mH -30%/+50%
INDUCTANCE	3-4 10kHz, 50mVAC, Ls	3.3mH -30%/+50%
SATURATION CURRENT	1-4 tie(2+3), 20% rolloff from initial	5.0A
LEAKAGE INDUCTANCE	1-4 tie(2+3), 10kHz, 50mVAC, Ls	90uH min.
6C/6B DIELECTRIC	1-Core tie(1+4), 1875VAC, 1 second	1500VAC, 1 minute
6C DIELECTRIC	1-4 2514VAC, 1 second	2011VAC, 1 minute
URNS RATIO	(1-2):(4-3)	1:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.





Rated Current: 2.0A (where DC current through both windings raises temperature of part by 40°C).

-Current must be de-rated when ambient temperature is above 85°C.

Designed to meet UL Recognized Insulation System M7-130(B), E106391.

6C/6B Designed to comply with UL 1993 for 347VACrms or VDC.

6C Designed to comply with UL 840 for 347VACrms or VDC for Overvoltage Category II and Pollution Degree II.

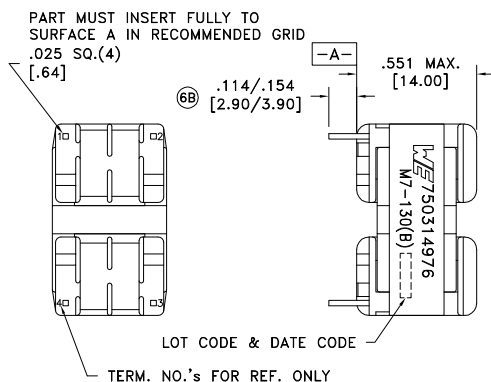

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [1.3] Footprint: ±.001 [1.3]	DRAWING TITLE 6C FILTER COMMON MODE CHOKE eiSos p/n: 750314976	PART NO. 750314976
6C	8/15	Method: Tray PKG-0822 www.we-online.com/midcom				
6B	6/15					
6A	5/15	SEE REVISION SHEET FOR REVISION LEVEL				



SPECIFICATION SHEET 1 OF 1