
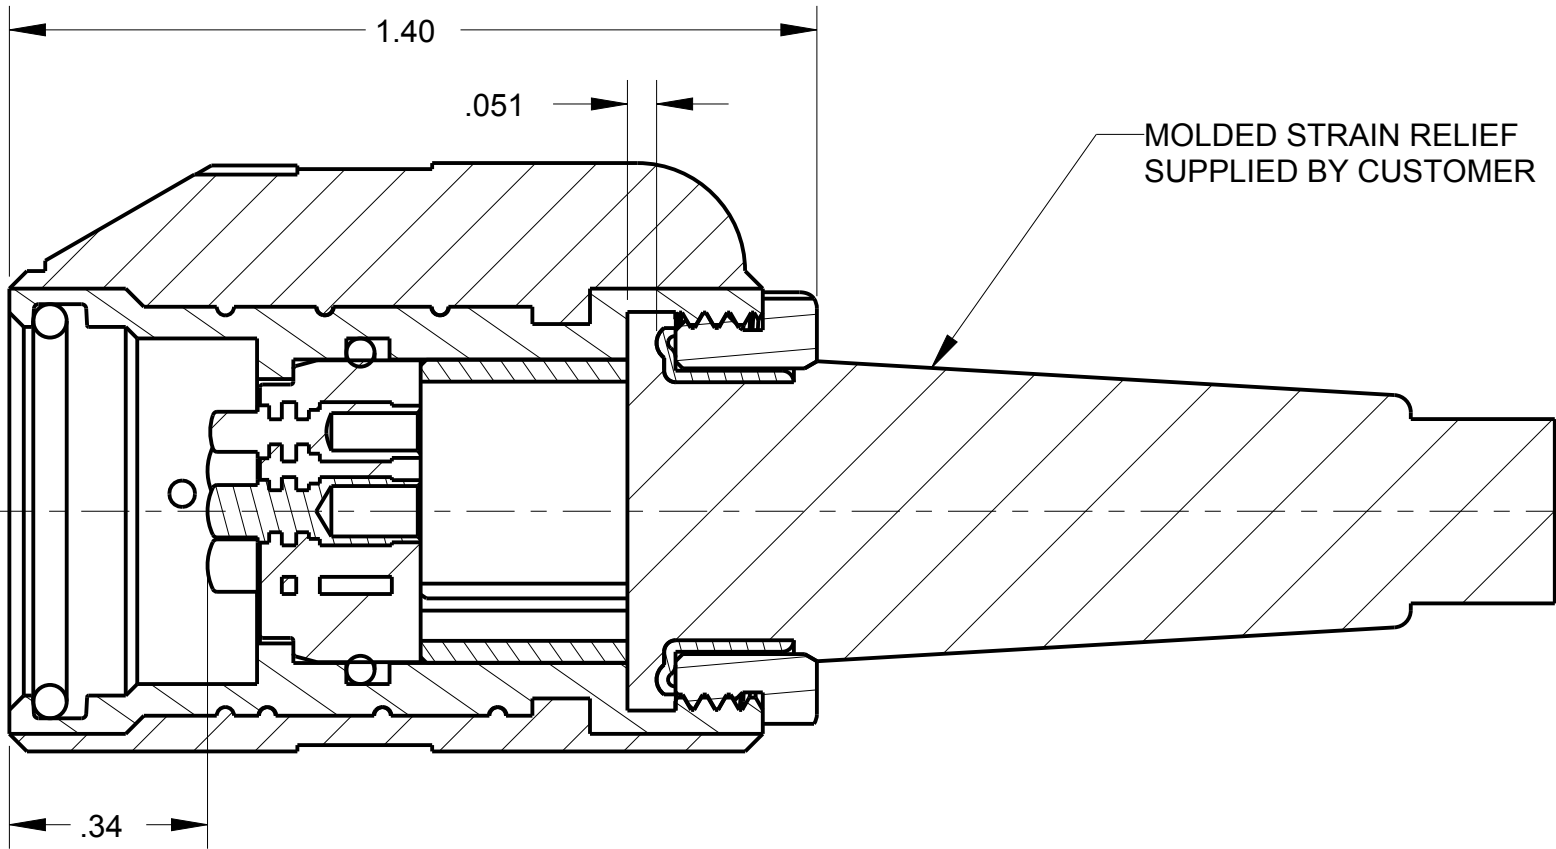
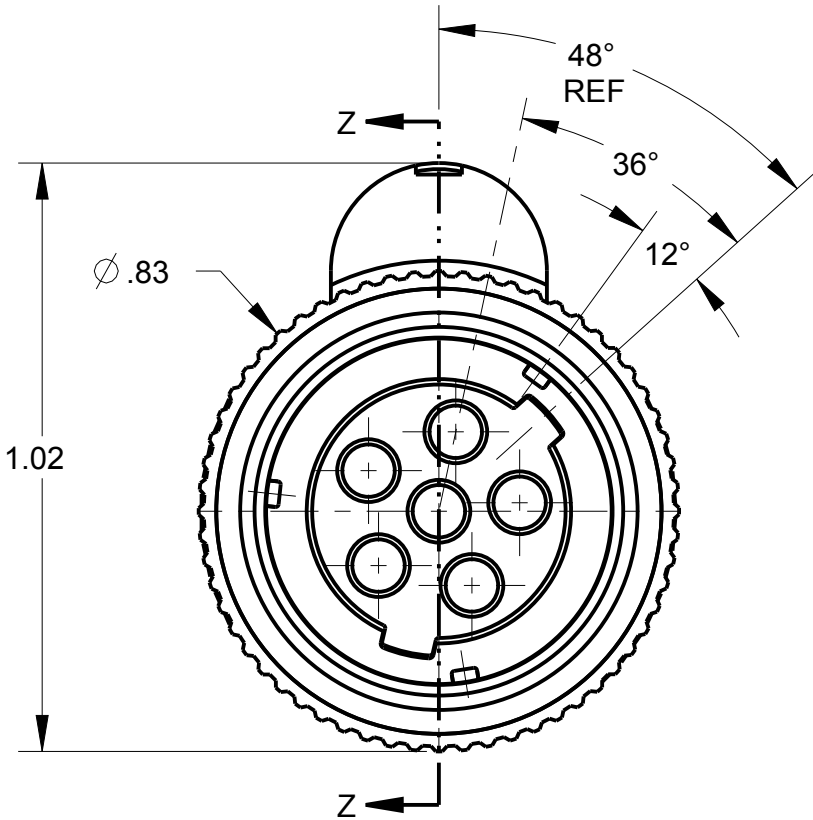


ITEM #	PART #	QTY	DESCRIPTION	MATERIAL
1	SEE TABLE #1	1	SHELL ASS'Y	GLASS FILLED NYLON & 303 SS
2	AP-126-6	1	INSERT ASS'Y	DIALLYPHTHALATE, TYPE SDGF & GOLD PLATED BRASS
3	AP-105-5	1	STRAIN RELIEF	NYLON
4	AP-105-6	1	FERRULE	STAINLESS STEEL
5	AP-105-8	1	NUT CLAMP	NYLON, BLACK PER MIL-P-17091

C AP-156-CP

TABLE #1			
AUDIO PLUG #	MILITARY PART #	SHELL ASS'Y	Ø CABLE
AP-156/6-1	M55116/6-1	AP-156-1	Ø .165 ± .010
AP-156/6-2	M55116/6-2	AP-156-2	Ø .228 ± .010
AP-156/6-3	M55116/6-3	AP-156-3	Ø .250 ± .010
AP-156/6-4	M55116/6-4	AP-156-4	Ø .290 ± .010
AP-156/6-5	M55116/6-5	AP-156-5	Ø .320 ± .010

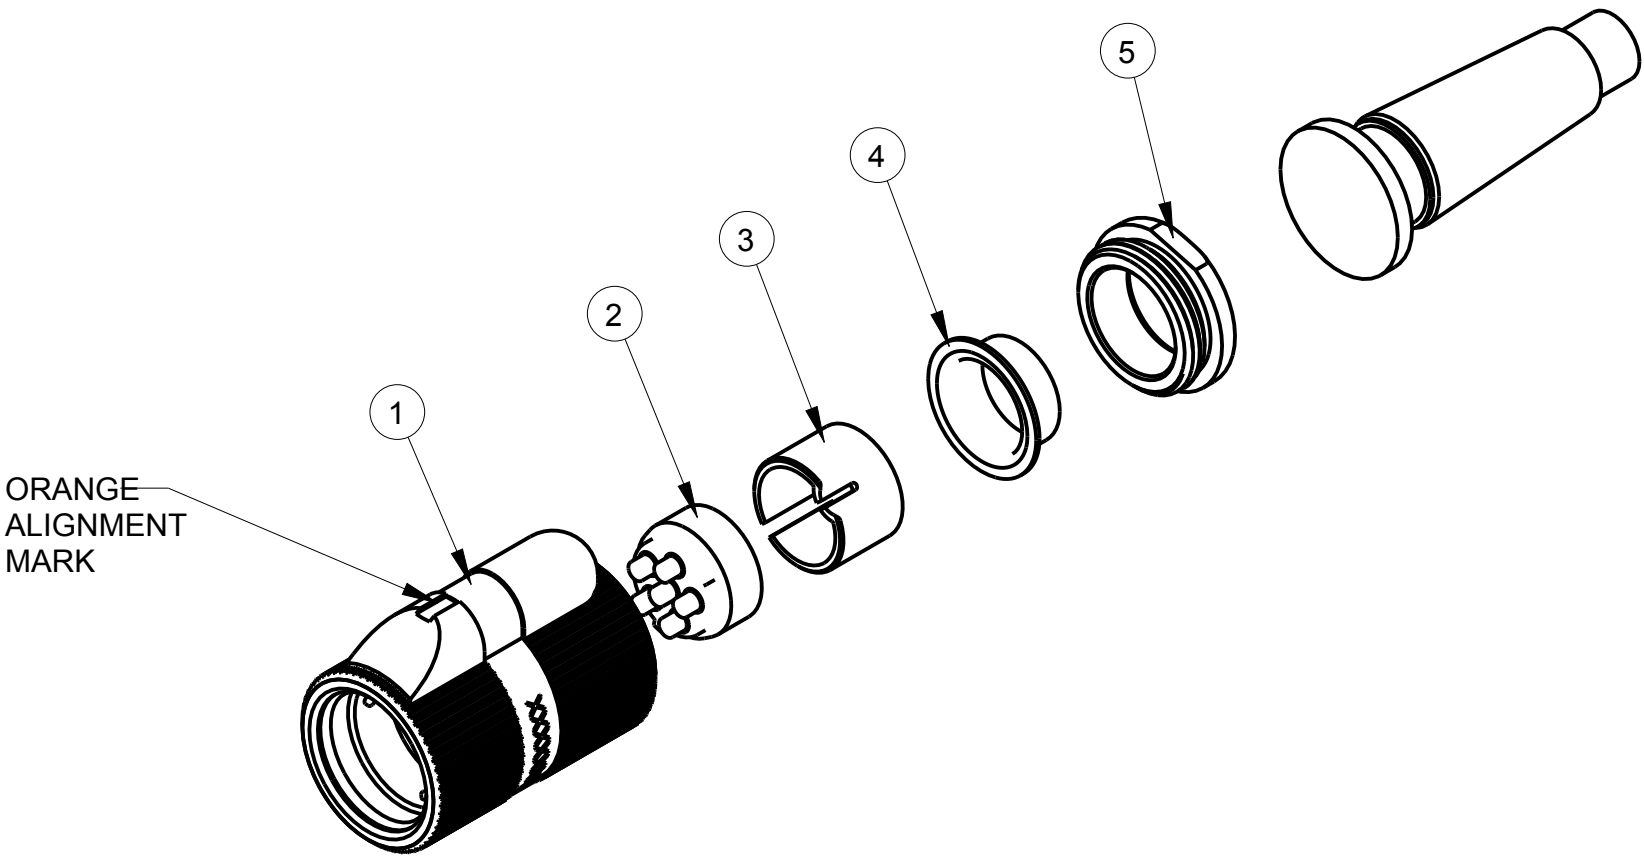

SECTION Z-Z

NOTES:
1) UNLESS OTHERWISE SPECIFIED, CONNECTOR MEETS ALL GENERAL REQUIREMENTS & SPECIFICATIONS OF MIL-C-55116
2) THE DASH NUMBERS AGREE WITH CUSTOMER SUPPLIED MOLDED STRAIN RELIEF

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

					DWN.BY	MNF	DATE	MATERIAL		
					CHECKED BY	L SMITH	DATE	FINISH		
D	DEL: 12° ; 36° , ADD: 36° ; 48° REF: 1.40	226	8/31 2015	HR	APPR.BY	L SMITH	DATE	WEIGHT	SCALE = 1.00 :1	NEXUS STAMFORD,CONN
C	ADD: AP-156/6-2, /6-3, /6-4, & /6-5	209	11/13 2014	HR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & OR (mm)		TITLE			
B	ADD P/N'S IN P/L	101	2/25 2011	HR	TOLERANCES: DECIMAL: ±.XX(X.X) ±.XXX(X.XX) ±.XXXX(X.XXX) ±.0X(0.X) ±.00X(0.0X) ±.000X(0.0XX)		AUDIO PLUG			
A	REVISED & REDRAWN ON CAD	0259	2/24 1997	LS	FRACTION: ±X/XX ± X/XX ANGLES: ±X ° ±X °		DO NOT SCALE DWG. SHEET 1 OF 1			
LET.	REVISION	CN #	DATE	CHK	C AP-156-CP					