

Power Splitter/Combiner

JPS-3-1

3 Way-0° 50Ω 5 to 300 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1	6
PORT 2	4
PORT 3	3
GROUND	2,5


Outline Drawing

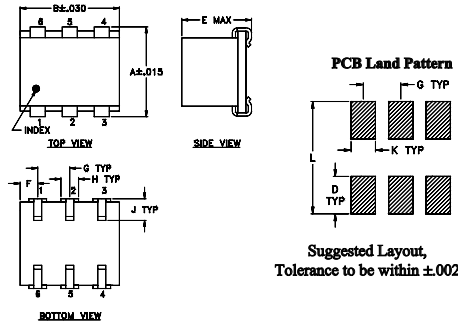

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-211
Suggested PCB Layout (PL-097)

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030\"

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 5 to 300 MHz
- high isolation, 33 dB typ.
- low insertion loss, 0.3 dB typ.

Applications

- VHF
- defense & federal communications
- amateur & FM radio



Generic photo used for illustration purposes only

CASE STYLE: BH292

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _l -f _u																		
5-300	34	25	33	23	32	20	0.3	0.6	0.3	0.7	0.5	1.4	2.0	4.0	6.0	0.4	0.4	0.6

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
5.00	4.96	5.08	5.03	0.12	36.91	33.62	35.80	0.62	1.09	1.11	1.13	1.16
8.00	4.93	5.07	5.00	0.14	37.89	34.24	35.50	0.52	1.07	1.08	1.10	1.14
10.00	4.94	5.04	5.00	0.11	38.11	34.35	35.29	0.36	1.06	1.07	1.10	1.13
20.00	4.95	5.04	4.99	0.09	37.92	34.31	34.69	0.22	1.04	1.06	1.08	1.12
35.00	4.98	5.06	5.02	0.08	37.22	33.58	33.72	0.13	1.04	1.05	1.07	1.11
50.00	4.99	5.08	5.05	0.09	36.36	33.15	32.78	0.13	1.03	1.04	1.06	1.11
65.00	5.01	5.10	5.04	0.08	35.45	32.52	31.94	0.25	1.03	1.04	1.05	1.11
80.00	5.03	5.11	5.06	0.08	34.62	31.74	31.15	0.26	1.04	1.04	1.05	1.10
95.00	5.05	5.13	5.08	0.08	34.24	31.40	30.56	0.14	1.04	1.04	1.05	1.09
110.00	5.08	5.15	5.10	0.07	34.06	31.26	30.29	0.23	1.04	1.04	1.05	1.09
130.00	5.11	5.17	5.12	0.06	34.13	31.25	29.99	0.37	1.05	1.04	1.05	1.08
170.00	5.18	5.22	5.16	0.05	33.68	30.69	28.91	0.41	1.03	1.03	1.07	1.07
210.00	5.24	5.27	5.22	0.05	35.00	30.99	28.88	0.54	1.07	1.01	1.07	1.07
250.00	5.34	5.32	5.27	0.07	40.60	33.64	29.78	0.57	1.12	1.02	1.08	1.08
300.00	5.50	5.45	5.37	0.12	41.62	40.75	30.25	0.91	1.11	1.02	1.12	1.11

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

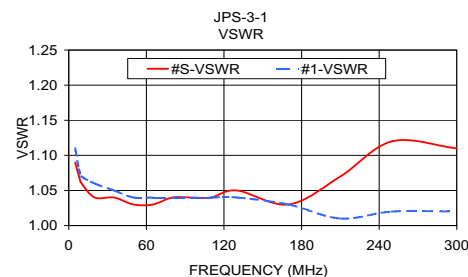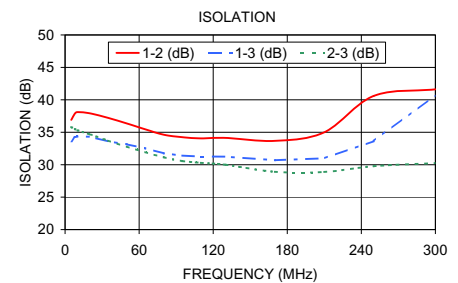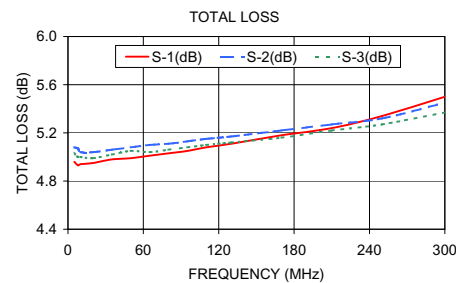

electrical schematic

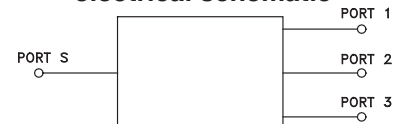

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[JPS-3-1+](#)