




Mini-Circuits

DESIGNER'S KIT K1-MCA+

Frequency Mixers

50Ω 500 to 5000 MHz

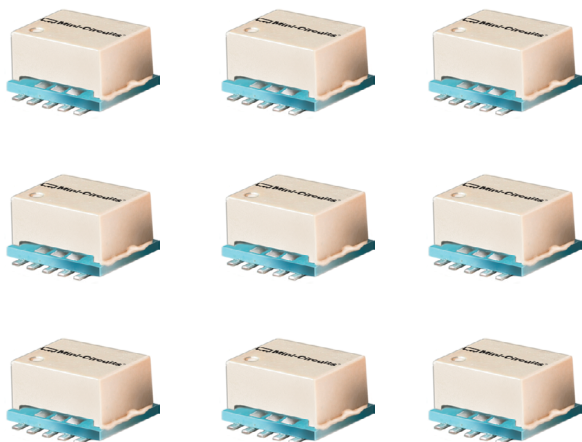

FEATURES

- Triple balanced, wide bandwidth
- Excellent isolation, 30dB
- Large selection of models, LO levels 10,13 and 17dBm
- Low conversion loss, 7dB
- Very good matching, 2:1 VSWR typ.
- Small size 0.25"x 0.3"x 0.19"

 MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION


K1-MCA+ ELECTRICAL SPECIFICATIONS

(6 models, 5 of each, 30 total)

Model	LO level (dBm)	Frequency (MHz)		Conversion Loss (dB)	RF In @ 1 dB Compr. (dBm)	IP3 (dBm)	LO-RF Isolation (dB)	LO-IF Isolation (dB)
		LO/RF	IF					
MCA-35LH+	10.0	500-3500	10-1500	6.9	6.0	16	32	30
MCA-50LH+	10.0	1000-5000	10-1500	7.3	6.0	18	35	32
MCA-35MH+	13.0	500-3500	10-1500	6.9	9.0	20	29	29
MCA-50MH+	13.0	1000-5000	10-1500	7.3	9.0	21	34	30
MCA-35H+	17.0	500-3500	10-1500	6.9	14.0	24	30	30
MCA-50H+	17.0	1000-5000	10-1500	7.3	14.0	23	30	30

Protected under U.S. Patent 6,917,796

 REV. A
 ECO-009343
 K1-MCA+
 MCL NY
 210820

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[K1-MCA+](#)