



THE BIG DEAL

- Low Insertion Loss, 1.6 dB Typ.
- Good Return Loss, 12 dB Typ.
- Stop Band Rejection, 35 dB Typ.
- Small size, 1210



Generic photo used for illustration purposes only

CASE STYLE: JV1210C-13

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Test & Measurement Equipment
- Communications, Radar, EW and ECM Defense Systems

PRODUCT OVERVIEW

LFCV-2002+ is a miniature low temperature co-fired ceramic (LTCC) low pass filter with a DC to 20 GHz passband supporting a variety of applications. This model provides 1.6 dB typical insertion loss over a wide band due to its rugged monolithic construction. Housed in a small 1210 ceramic form factor, the filter is ideal for dense signal chain PCB layouts where it complements MMIC size and performance. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well suited for environmental extremes of high humidity and temperature.

KEY FEATURES

Feature	Advantages
Ultra-wide Stopband	The LTCC lowpass filter provides a very good stopband rejection to 50 GHz suitable for high end applications.
LTCC Construction	Provides repeatable performance in a rugged, ceramic package well suited for tough environments such as high humidity and temperature extremes.
Small footprint (1210)	Allows for high layout density of circuit boards, while minimizing effects of parasitics.
Good power handling, 1W	Supports a wide range of system power requirements.



LTCC SMT

Low Pass Filter

LFCV-2002+

Mini-Circuits

50Ω

DC to 20 GHz

ELECTRICAL SPECIFICATIONS^{1,2} AT 25°C

Parameter		F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	F1 - F2	DC-20	—	1.6	2.0	dB
	Return Loss	F1 - F2	DC-20	—	12.0	—	dB
Stop Band	Insertion Loss	F3 - F4	25.8-40	—	36	—	dB
		F4 - F5	40-50	—	25	—	

1. Measured on Mini-Circuits Test Board TB-LFCV-2002C+ with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method

2. DC blocking capacitors are required in Applications where DC voltage and/or current is present at either RF1 or RF2 ports. Please contact Mini-Circuits for alternatives if DC pass from RF1-RF2 is required.


ABSOLUTE MAXIMUM RATINGS¹

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
RF Power Input ²	1W max.


1. Permanent damage may occur if any of these limits are exceeded.

2. Derate linearly to 0.5 W at 125°C.

TYPICAL FREQUENCY RESPONSE



FUNCTIONAL SCHEMATIC

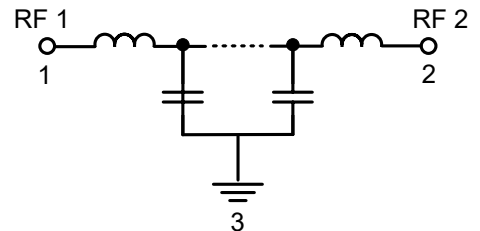



Low Pass Filter

LFCV-2002+

RF 1	1
RF 2	2
GROUND	3



CERAMIC

Low Pass Filter

LFCV-2002+



Mini-Circuits

50Ω

DC to 20 GHz

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (GHz)	Insertion Loss (dB)	Return Loss (dB)
0.05	0.04	39.22
0.5	0.06	34.47
1.0	0.09	32.60
5.0	0.29	23.34
6.0	0.31	21.58
7.0	0.31	19.90
8.0	0.32	17.92
9.0	0.43	15.75
10	0.54	15.25
15	0.56	20.14
20	1.08	25.91
25	41.60	1.10
30	45.03	7.50
40	43.98	0.70
50	30.61	2.44

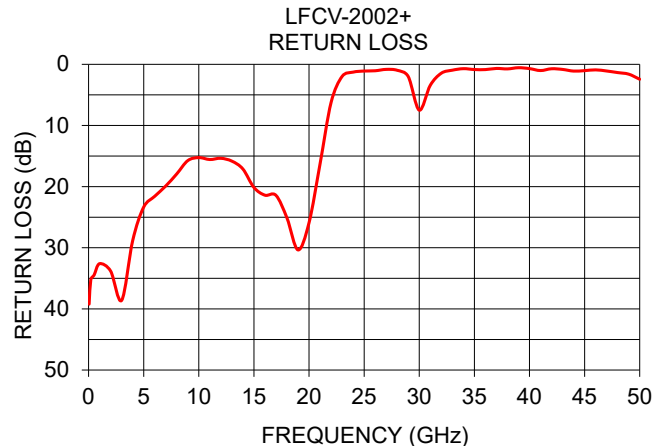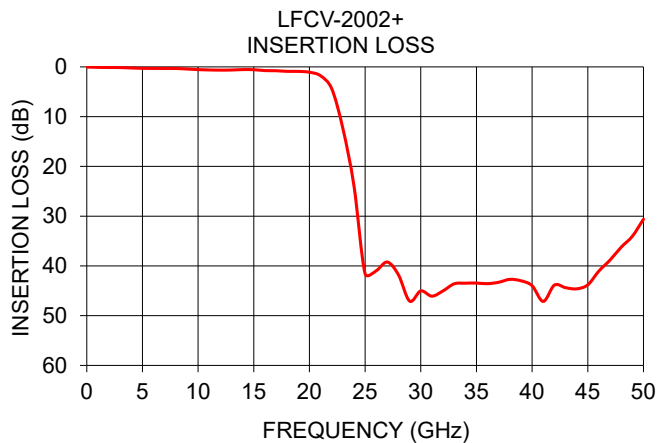

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[LFCV-2002+](#)