
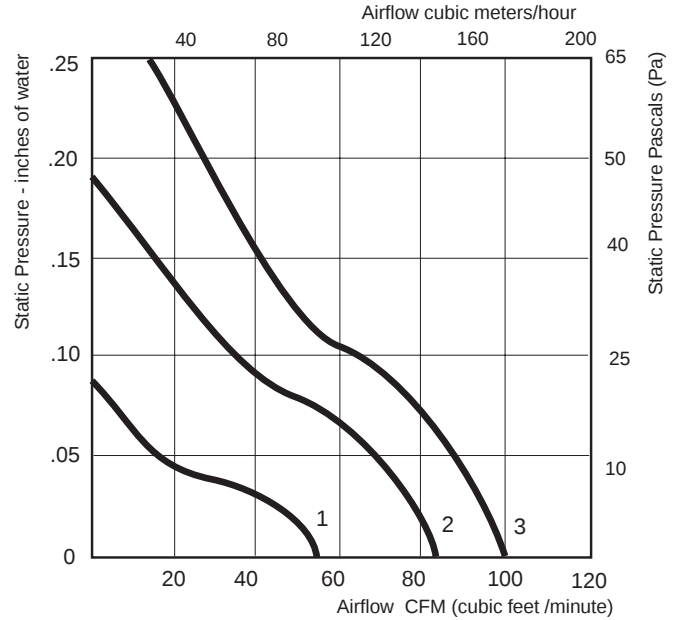


119 x 32 mm (4.7" X 1.3") Brushless DC

4300 Series

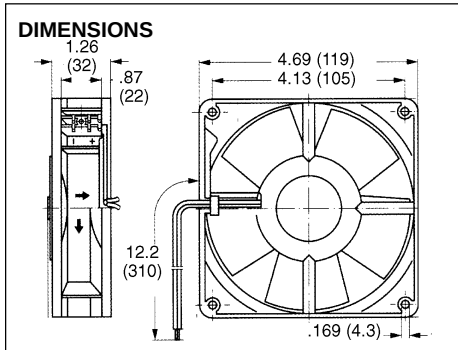

4.69" X 4.69" X 1.26" Brushless DC, Plastic, Air Exhaust – Over Struts

Curve	PART NUMBER	Type of Bearing	DC Volts	Voltage Range	Watts	CFM @ 0"	dBA	Temp. Max °C	Wgt. (oz)	Features	Approvals*		
1	4312L	Ball	12	6 - 15	1.2	56	30	75	8	22 AWG 12.2" Leads	✓	✓	✓
1	4312LS	Ball	12	6 - 15	1.2	56	30	75	8	Leads, Hall Effect	✓	✓	✓
1	4392L	Ball	12	6 - 15	1.2	56	30	75	8	.110" x .02" Terminals	✓	✓	✓
2	4312M	Ball	12	6 - 15	2.6	82	39	75	8	22 AWG 12.2" Leads	✓	✓	✓
2	4312MS	Ball	12	6 - 15	2.6	82	39	75	8	Leads, Hall Effect	✓	✓	✓
2	4392M	Ball	12	6 - 15	2.6	82	39	75	8	.110" x .02" Terminals	✓	✓	✓
3	4312	Ball	12	6 - 15	5.0	100	45	75	8	22 AWG 12.2" Leads	✓	✓	✓
3	4312S	Ball	12	6 - 15	5.0	100	45	75	8	Leads, Hall Effect	✓	✓	✓
3	4392	Ball	12	6 - 15	5.0	100	45	75	8	.110" x .02" Terminals	✓	✓	✓
1	4314L	Ball	24	12 - 28	1.2	56	30	75	8	22 AWG 12.2" Leads	✓	✓	✓
1	4314LS	Ball	24	12 - 28	1.2	56	30	75	8	Leads, Hall Effect	✓	✓	✓
1	4394L	Ball	24	12 - 28	1.2	56	30	75	8	.110" x .02" Terminals	✓	✓	✓
2	4314M	Ball	24	12 - 28	2.6	82	39	75	8	22 AWG 12.2" Leads	✓	✓	✓
2	4394M	Ball	24	12 - 28	2.6	82	39	75	8	.110" x .02" Terminals	✓	✓	✓
3	4314	Ball	24	12 - 28	5.0	100	45	75	8	22 AWG 12.2" Leads	✓	✓	✓
3	4314S	Ball	24	12 - 28	5.0	100	45	75	8	Leads, Hall Effect	✓	✓	✓
3	4314/12	Ball	24	12 - 28	5.0	100	45	75	8	Leads, Hall Effect	✓	✓	✓
3	4374	Ball	24	12 - 28	5.0	100	45	75	8	.110" x .03" Terminals	✓	✓	✓
3	4394	Ball	24	12 - 28	5.0	100	45	75	8	.110" x .02" Terminals	✓	✓	✓
3	4318	Ball	48	36 - 53	5.0	100	45	75	8	22 AWG 12.2" Leads	✓	✓	✓
3	4318/2	Ball	48	36 - 53	5.0	100	45	75	8	Leads, Hall Effect	✓	✓	✓
3	4378/2	Ball	48	36 - 53	5.0	100	45	75	8	.03" Term, Hall Effect	✓	✓	✓
3	4398	Ball	48	36 - 53	5.0	100	45	75	8	.110" x .02" Terminals	✓	✓	✓

* UL yellow card E38324, CSA file 27697, VDE file 1887

CONSTRUCTION
MOUNTING &
CONNECTION

Mounting: From either face using four .169" (4.3 mm) holes

Weight: 8 ounces (220g)

Housing: Plastic with plastic impeller

Connection: Lead wires color coded, red (+), blue (-) / black (-)

Terminals: .110" x .03" or .02" (2.8 x .76 or .5 mm)

Options: Hall Effect monitor