



Mini-Circuits

LTCC SURFACE MOUNT

# Low Pass Filter

50Ω

DC to 23.8 GHz

LFCV-2402+

## THE BIG DEAL

- Stop Band Rejection, up to 38dB Typ.
- Pass Band Return Loss, 13dB Typ.
- Rugged Ceramic Construction
- Small Size, 1210 Surface Mount Footprint




Generic photo used for illustration purposes only

## APPLICATIONS

- Radar, EW, and ECM Defense Systems
- Test & Measurement Equipment

## FUNCTIONAL DIAGRAM

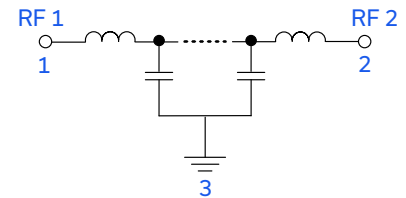

## PRODUCT OVERVIEW

Mini-Circuits' LFCV-2402+ is a miniature low-temperature co-fired ceramic (LTCC) low pass filter with a DC to 23.8GHz passband that supports a variety of applications. This model provides 2.8dB typical insertion loss over a wide band due to its rugged monolithic construction. Housed in a small 1210 ceramic form factor, the filter is ideal for dense signal chain PCB layouts, where it complements MMIC size and performance. The LTCC fabrication process assures minimal RF performance variation while delivering a product that is well-suited for environmental extremes of high humidity and temperature.

## KEY FEATURES

Feature	Advantages
Ultra-wide Stopband	Provides excellent stopband rejection to 56GHz and beyond, suitable for wide band applications.
LTCC Construction	The use of LTCC technology allows for repeatable performance in a rugged ceramic package, well suited for tough environments such as high humidity and temperature extremes. See Mini-Circuits Environmental Rating ENV06T10 for more information.
Excellent Performance for Size	Offers best-in-class performance relative to larger-size alternative technologies. This mmWave multi-layer surface mount LTCC filter in a 1210 package allows for space to be saved in dense circuit board layouts, while also minimizing the effects of parasitics.





LTCC SURFACE MOUNT

# Low Pass Filter

**LFCV-2402+**

50Ω DC to 23.8 GHz

## ELECTRICAL SPECIFICATIONS<sup>1,2,3</sup> AT 25°C

Parameter	F#	Frequency (GHz)	Min.	Typ.	Max.	Units
Passband	Insertion Loss	DC-F1	DC - 23.8	—	2.8	4
	Freq. Cut-Off <sup>4</sup>	Fc	24	—	3	—
	Return Loss	DC-F1	DC - 23.8	—	13	—
Stop Band	Rejection	F2-F3	33 - 48	33	38	—
		F3-F4	48 - 56	29	34	—
		F4-F5	56 - 67	—	24	—

1. Tested on Evaluation Board P/N TB-LFCV-2402C+ with the connector and feedline effects de-embedded using the 2XThru IEEE P370 method.

2. Bi-directional RF1 and RF2 ports can be interchanged.

3. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

4. Typical variation  $\pm 3\%$


## ABSOLUTE MAXIMUM RATINGS<sup>5</sup>

Parameter	Ratings
Operating Temperature	-55°C to +125°C
Storage Temperature	-55°C to +125°C
RF Power Input <sup>6</sup>	1W

5. Permanent damage may occur if any of these limits are exceeded.

6. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.5W at +125°C.

## TYPICAL FREQUENCY RESPONSE AT 25°C

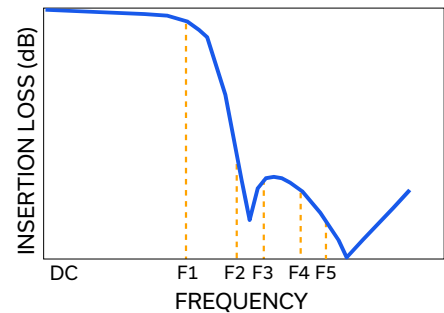



LTCC SURFACE MOUNT

# Low Pass Filter




**LFCV-2402+**

Mini-Circuits

50 $\Omega$

DC to 23.8 GHz

## TYPICAL PERFORMANCE GRAPHS AT 25°C

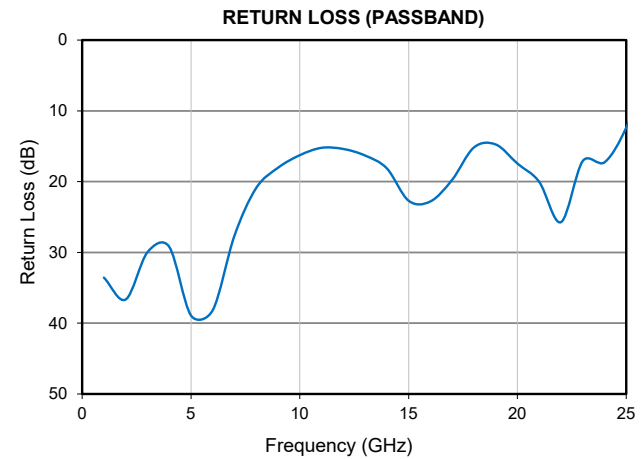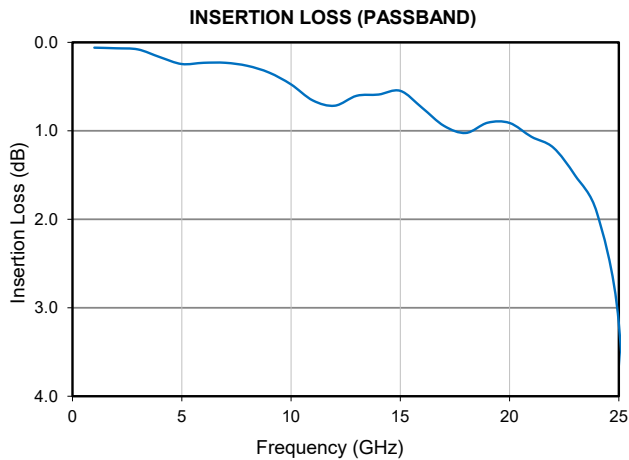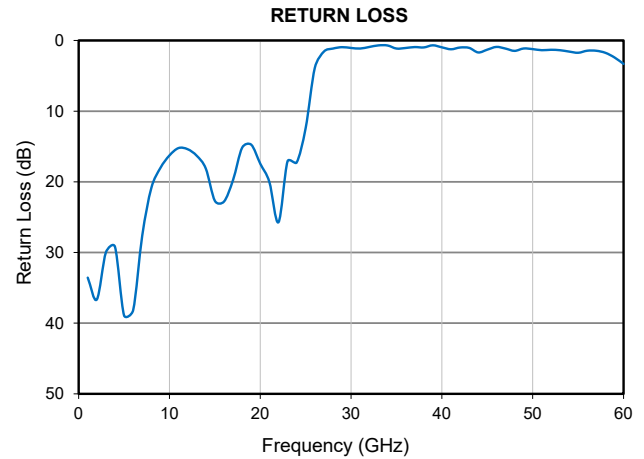



Mini-Circuits

LTCC SURFACE MOUNT

## Low Pass Filter

LFCV-2402+

50Ω

DC to 23.8 GHz

## FUNCTIONAL DIAGRAM


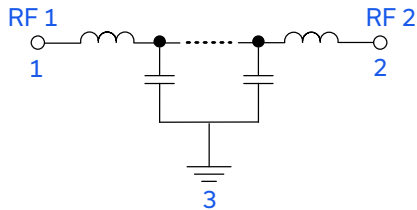


Figure 1. LFCV-2402+ Functional Diagram


## PAD DESCRIPTION

Function	Pad Number	Description
RF1 <sup>2</sup>	1	Connects to RF Input Port
RF2 <sup>2</sup>	2	Connects to RF Output Port
GROUND	3	Connects to Ground on PCB, (See drawing PL-743)

## SUGGESTED PCB LAYOUT (PL-743)

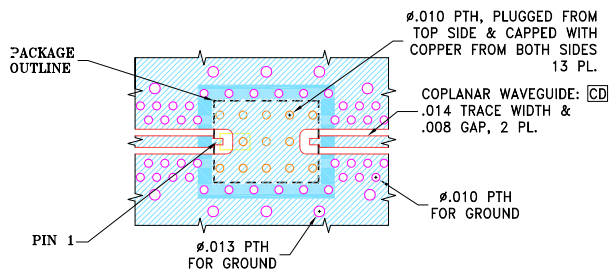

## STACK-UP DIAGRAM

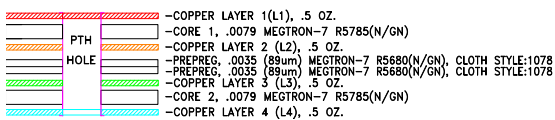

1. TOTAL FINISHED THICKNESS  $0.026 \pm 10\%$ .
2. PTH PRESENT FROM COPPER LAYER 1 TO COPPER LAYER 4.
3. INDICATED ON TOP VIEW PTH'S ARE PLUGGED WITH EPOXY AND CAPPED WITH COPPER FROM TOP SIDE.
4. L2, L3 AND L4 ARE CONTINUOUS GROUND PLANES.


## NOTES:

1. PCB IS MULTILAYER PCB, SEE STACK-UP DIAGRAM.
2. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR MEGTRON-7 R-5785(N/GN), WITH DIELECTRIC THICKNESS .0079; COPPER: 1/2 OZ.
- FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Figure 2. Suggested PCB Layout PL-743

## OUTLINE DRAWING

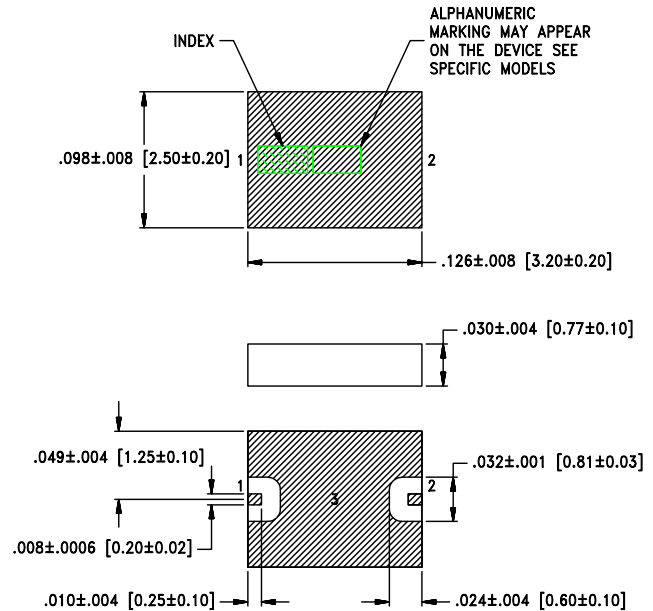

METALLIZATION

Weight: .024 grams

Dimensions are in inches [mm]. Tolerances: 2 Pl.  $\pm .010$ ; 3 Pl.  $\pm .005$ 

## PRODUCT MARKING\*: WK

\*Marking may contain other features or characters for internal lot control.



Mini-Circuits®

LTCC SURFACE MOUNT

# Low Pass Filter

**LFCV-2402+**

50Ω

DC to 23.8 GHz

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file) De-embedded to device pads
Case Style	JV1210C-13      Lead Finish: Gold Plate over Nickel Plate
RoHS Status	Compliant
Tape and Reel	F74
Suggested Layout for PCB Design	PL-743
Evaluation Board	TB-LFCV-2402C+ Gerber File
Environmental Ratings	ENV06T10

## NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[LFCV-2402+](#)