

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

**Nominal data**

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | R3G310-RR05-H1    |            |
| Motor                    | M3G084-DF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 277 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed                    | min <sup>-1</sup> | 2360       |
| Power input              | W                 | 500        |
| Current draw             | A                 | 2.2        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit

Subject to alterations

**Data according to ErP directive**

|                       |        |
|-----------------------|--------|
| Installation category | A      |
| Efficiency category   | Static |
| Variable speed drive  | Yes    |
| Specific ratio*       | 1.00   |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

|                                |                   | Actual | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | %                 | 66.2   | 44.4         | 48.4         |
| Efficiency grade N             |                   | 79.8   | 58           | 62           |
| Power input $P_{ed}$           | kW                | 0.51   |              |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 2400   |              |              |
| Pressure increase $p_{fs}$     | Pa                | 462    |              |              |
| Speed n                        | min <sup>-1</sup> | 2360   |              |              |

Data definition with optimum efficiency.

LU-151718


The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



## Technical features


|                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                               | 4.7 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Size                                                               | 310 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Surface of rotor                                                   | Coated in black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Material of electronics housing                                    | Die-cast aluminium                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Material of impeller                                               | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Number of blades                                                   | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Direction of rotation                                              | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Type of protection                                                 | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Insulation class                                                   | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Humidity class                                                     | F3-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Condensate discharge holes                                         | Rotor-side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Operation mode                                                     | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Motor bearing                                                      | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Technical features                                                 | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- PFC, active</li> <li>- RS485 MODBUS RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC interference immunity                                          | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| EMC harmonics                                                      | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| EMC interference emission                                          | Acc. to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Motor protection                                                   | Thermal overload protector (TOP) wired internally                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Cable exit                                                         | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Protection class                                                   | I (if protective earth is connected by customer at the connection point of the housing)                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Product conforming to standard                                     | EN 61800-5-1; EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Approval                                                           | EAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## Product drawing

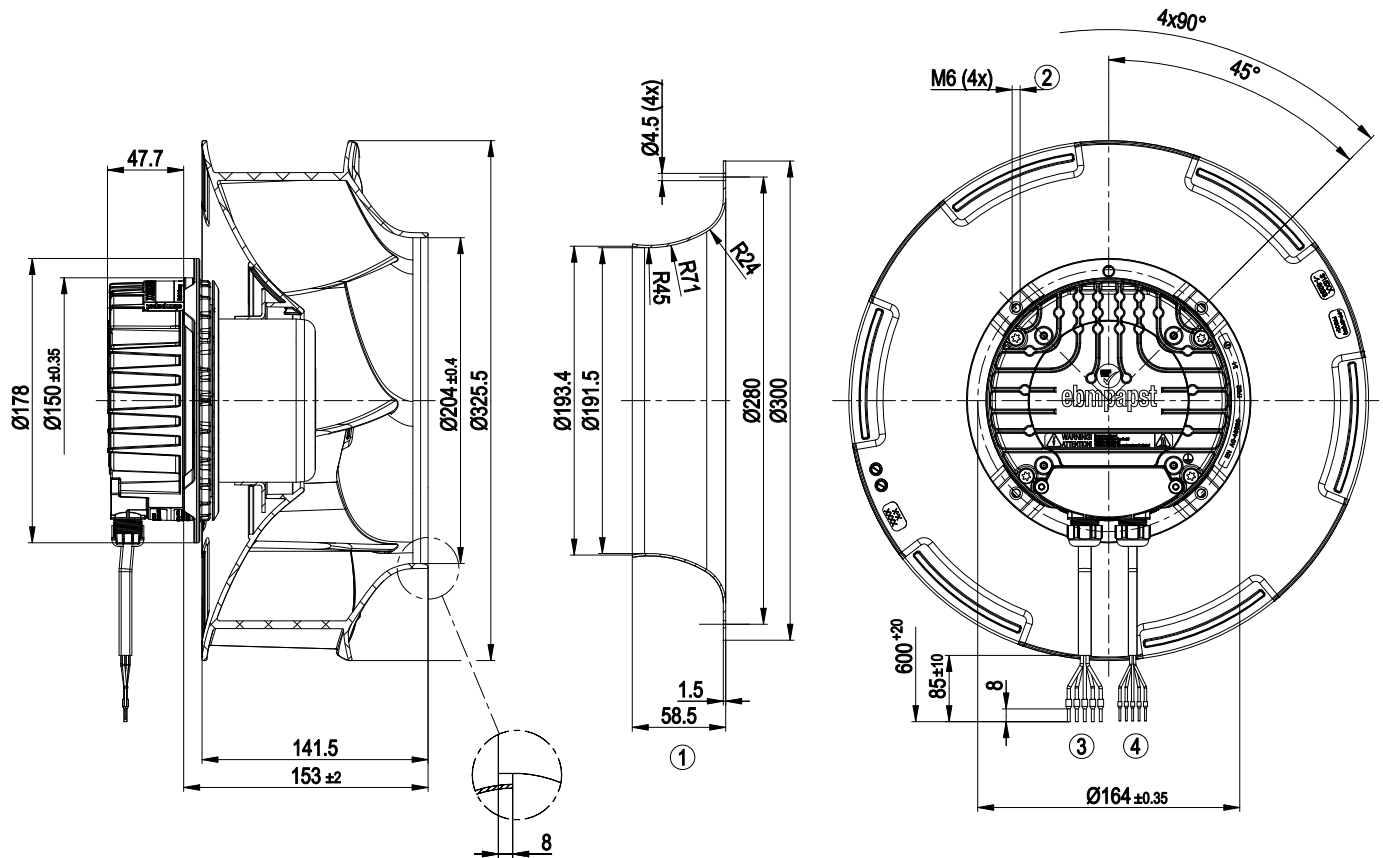


|   |                                                                             |
|---|-----------------------------------------------------------------------------|
| 1 | Accessory part: inlet nozzle 31000-2-4013 not included in scope of delivery |
| 2 | Depth of screw max. 16 mm                                                   |
| 3 | Connection line PVC AWG18, 5x crimped core-end sleeves                      |
| 4 | Connection line PVC AWG22, 5x crimped core-end sleeves                      |

## Connection screen

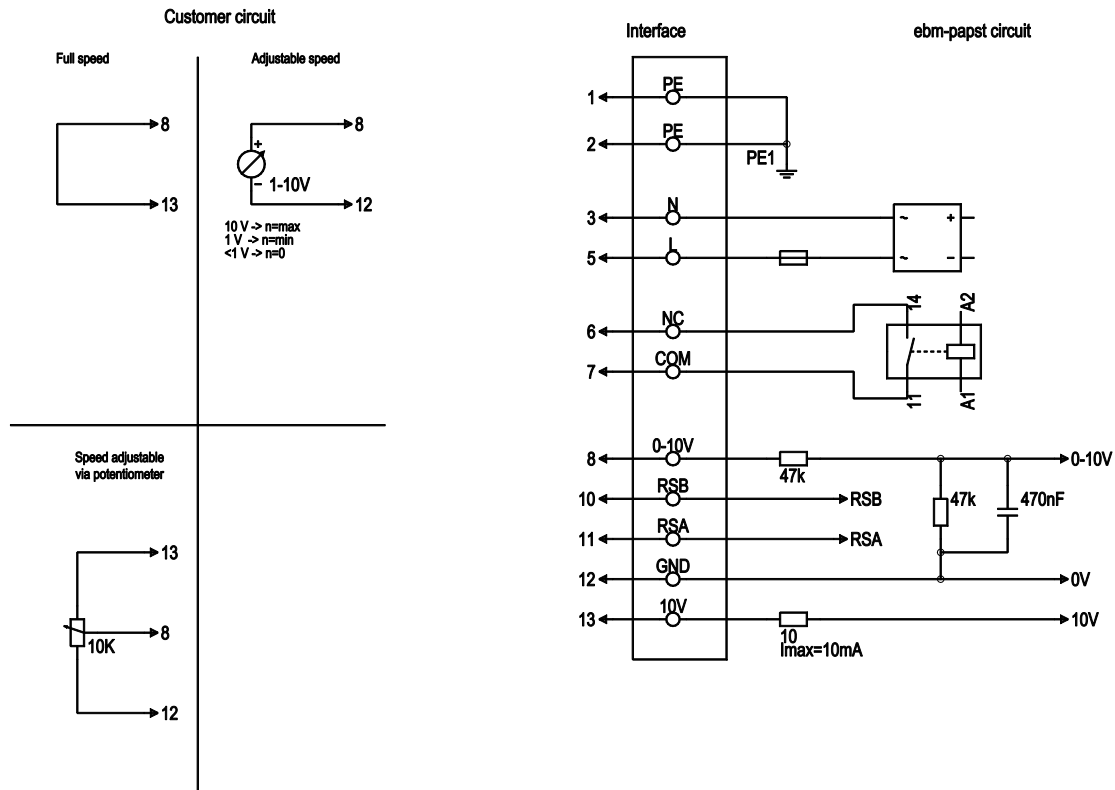

| No. | Conn. | Designation | Colour       | Function / assignment                                                                                                                                                                      |
|-----|-------|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 1, 2  | PE          | green/yellow | Protective earth                                                                                                                                                                           |
| 1   | 3     | N           | blue         | Supply voltage, neutral conductor, 50/60 Hz                                                                                                                                                |
| 1   | 5     | L           | black        | Supply voltage, phase, 50/60 Hz                                                                                                                                                            |
| 1   | 6     | NC          | white 1      | Status relay, floating status contact; break for failure, contact rating 250 VAC / 2A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side |
| 1   | 7     | COM         | white 2      | Status relay, floating status contact; common connection, contact rating 250 VAC / 2A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side |
| 2   | 8     | 0-10V       | yellow       | Analogue input 1 (set value); 0-10 V; Ri=100kΩ; parametrisable curve                                                                                                                       |
| 2   | 10    | RSB         | brown        | RS485 interface for Modbus, RSB                                                                                                                                                            |
| 2   | 11    | RSA         | white        | RS485 interface for Modbus, RSA                                                                                                                                                            |
| 2   | 12    | GND         | blue         | Reference ground for control interface, SELV                                                                                                                                               |
| 2   | 13    | +10V        | red          | Fixed voltage output 10 VDC; +10 V +/-3%; max. 10 mA; short-circuit-proof; power supply for external devices (e.g. potentiometer)                                                          |

## Charts: Air flow 50 Hz

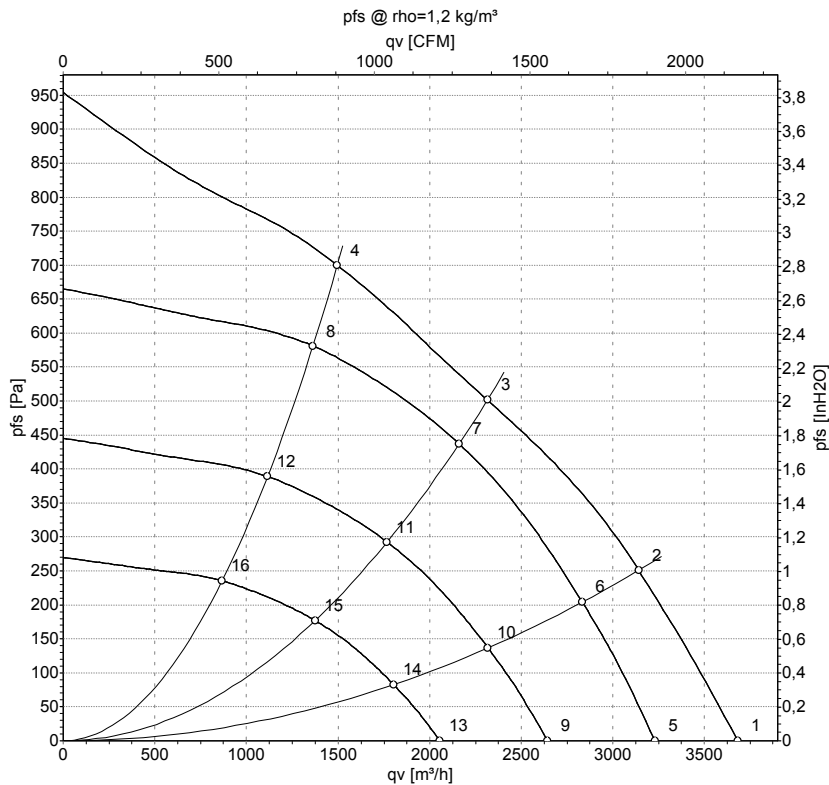

Measurement: LU-151718

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | qv   | p <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h | Pa              |
| 1  | 230 | 50 | 2510              | 430             | 1.88 | 74                | 81                | 3680 | 0               |
| 2  | 230 | 50 | 2440              | 500             | 2.20 | 69                | 76                | 3140 | 250             |
| 3  | 230 | 50 | 2360              | 500             | 2.20 | 65                | 72                | 2315 | 500             |
| 4  | 230 | 50 | 2410              | 500             | 2.20 | 70                | 77                | 1495 | 700             |
| 5  | 230 | 50 | 2200              | 291             | 1.27 | 71                | 78                | 3230 | 0               |
| 6  | 230 | 50 | 2200              | 373             | 1.62 | 67                | 74                | 2835 | 204             |
| 7  | 230 | 50 | 2200              | 420             | 1.83 | 63                | 70                | 2160 | 437             |
| 8  | 230 | 50 | 2200              | 393             | 1.71 | 67                | 75                | 1365 | 583             |
| 9  | 230 | 50 | 1800              | 159             | 0.70 | 66                | 73                | 2645 | 0               |
| 10 | 230 | 50 | 1800              | 204             | 0.89 | 62                | 69                | 2320 | 137             |
| 11 | 230 | 50 | 1800              | 230             | 1.00 | 58                | 65                | 1770 | 293             |
| 12 | 230 | 50 | 1800              | 215             | 0.94 | 62                | 70                | 1115 | 391             |
| 13 | 230 | 50 | 1400              | 75              | 0.33 | 59                | 67                | 2055 | 0               |
| 14 | 230 | 50 | 1400              | 96              | 0.42 | 55                | 63                | 1805 | 83              |
| 15 | 230 | 50 | 1400              | 108             | 0.47 | 52                | 59                | 1375 | 177             |
| 16 | 230 | 50 | 1400              | 101             | 0.44 | 56                | 63                | 870  | 236             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · qv = Air flow  
p<sub>fs</sub> = Pressure increase

