
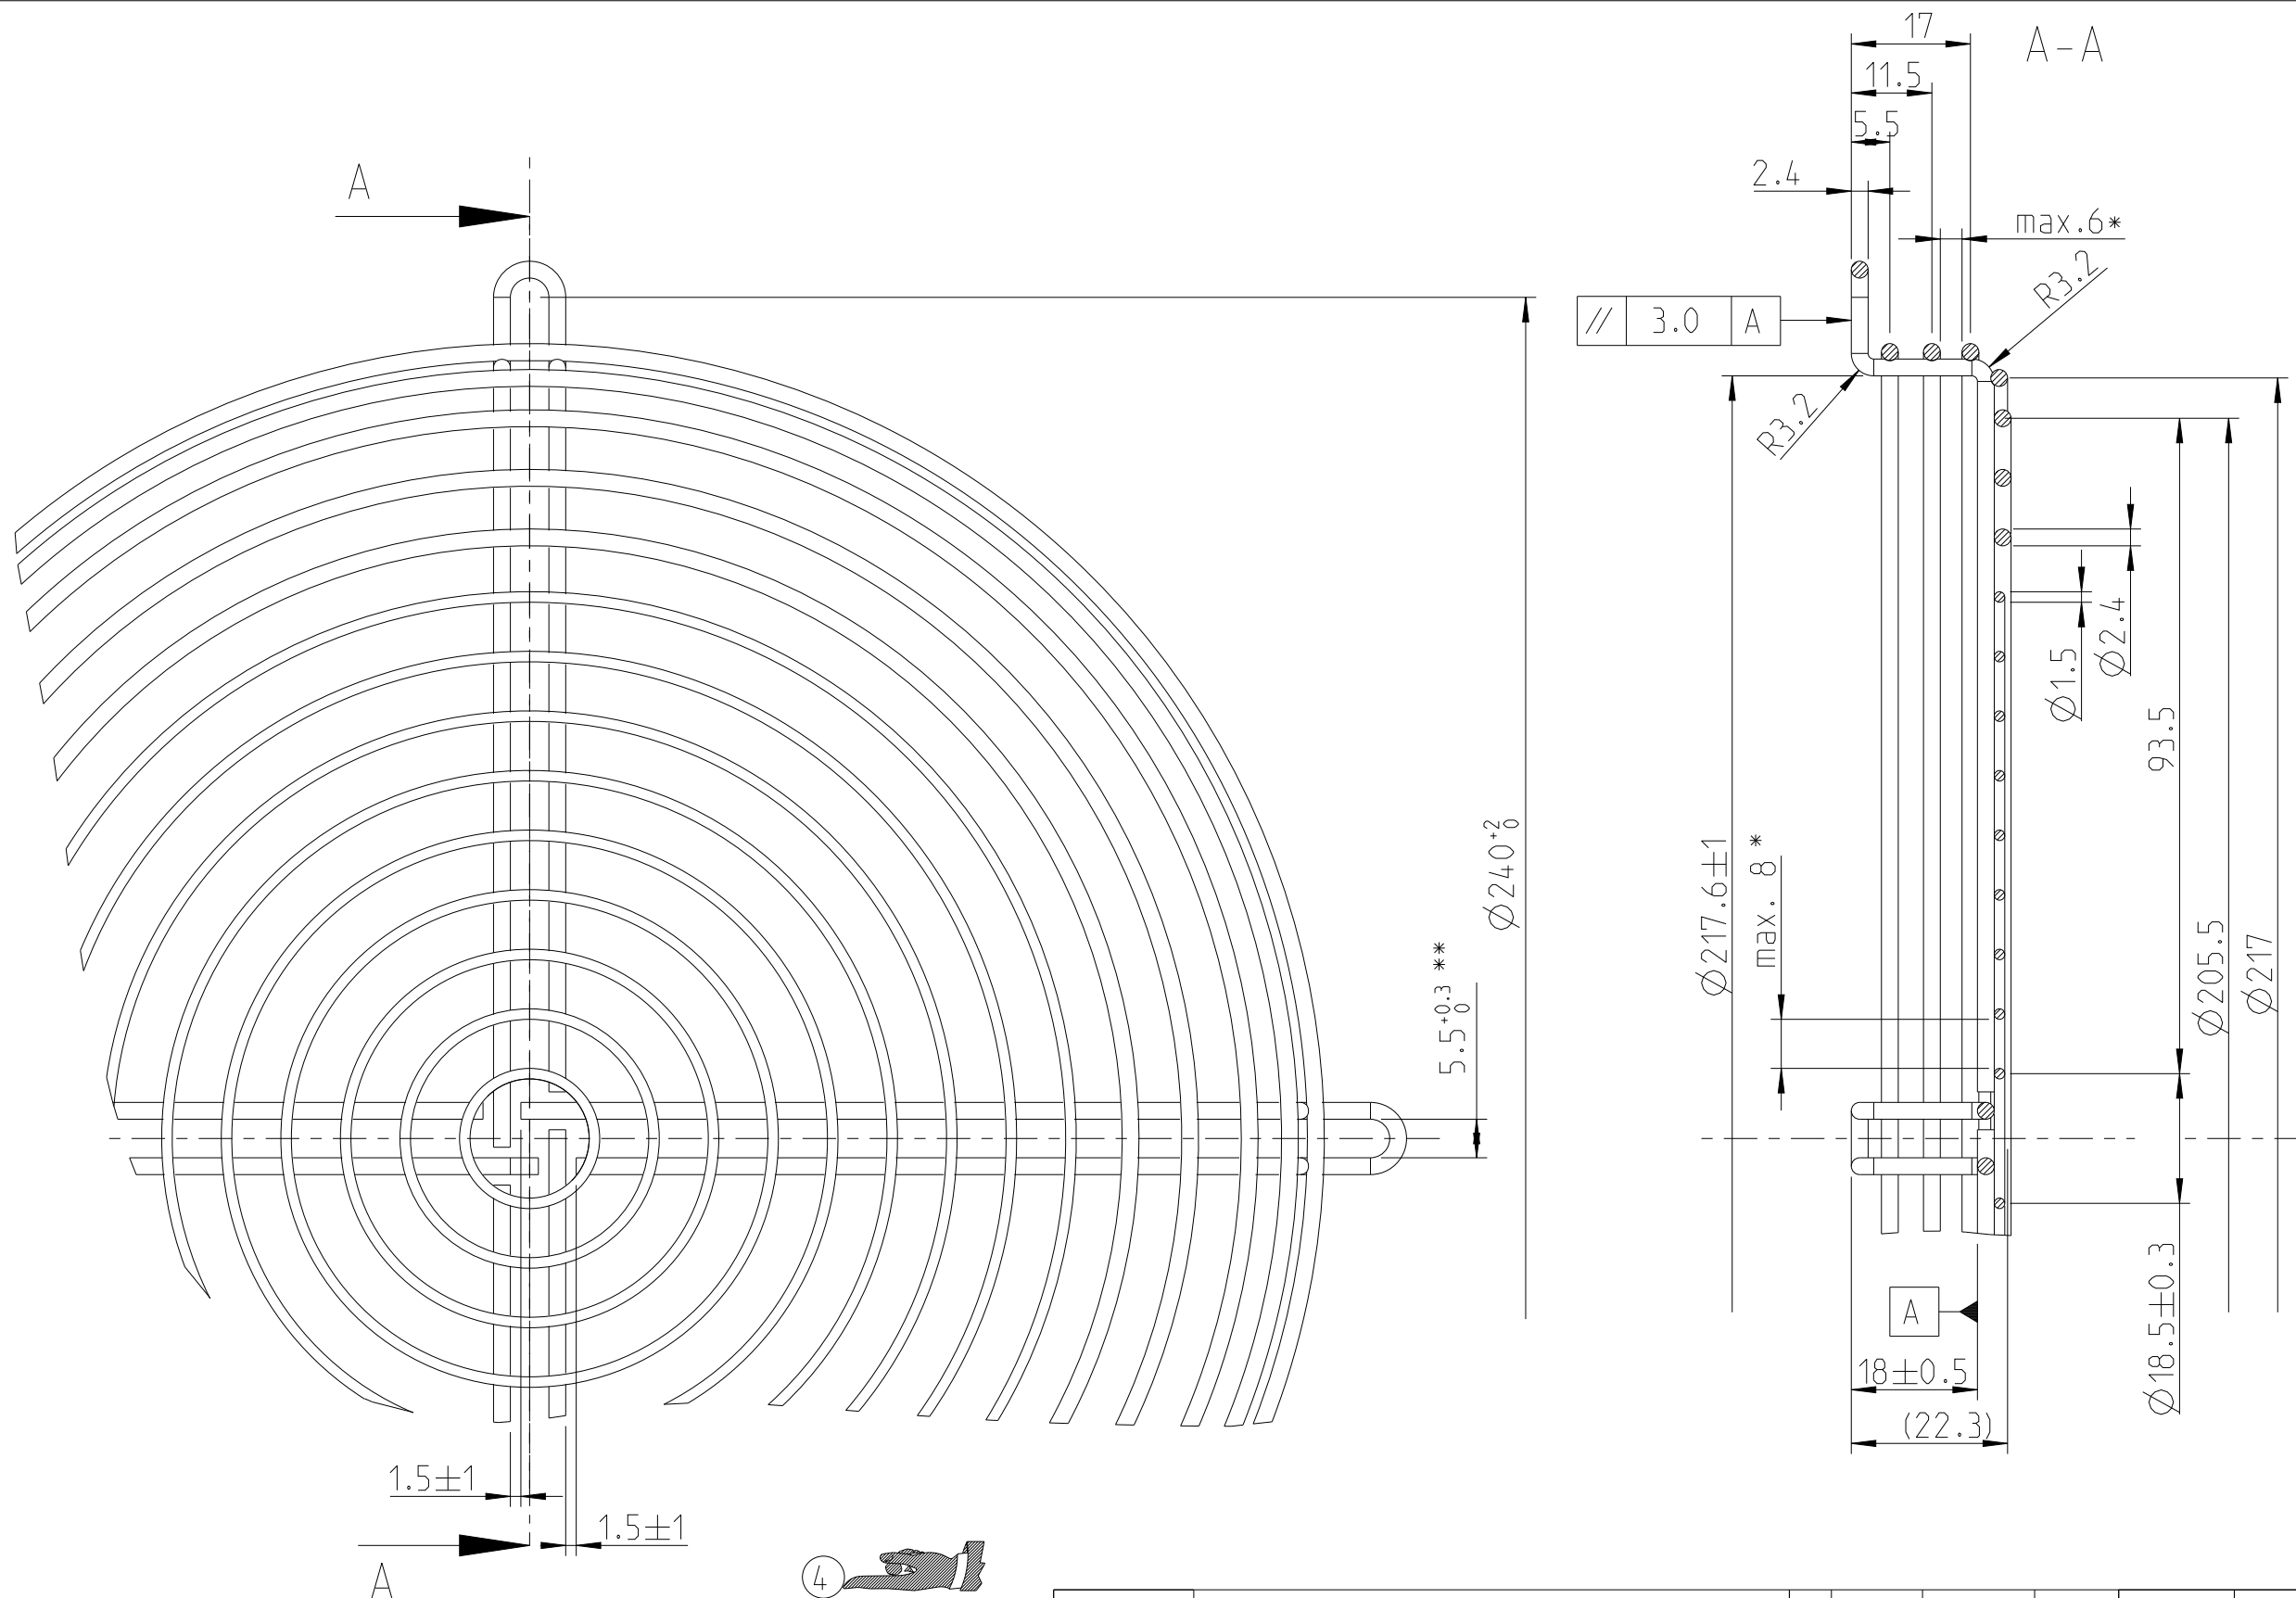


Werkstoff nach Werkstoffanweisung 58000-5-9950
Oberfläche: entsprechend Lackieranweisung 26304-5-9918
(Farbe: RAL 9006 Weißaluminium)
* Dieser Sicherheitsabstand muss zwischen allen Ringen eingehalten werden.
** Diese Maße müssen mit Prüflöhre kontrolliert werden.
Stoßkante der Ringe geschweißt
Maße in unbeschichtetem Zustand
unbemaßte Biegeradien R2,5

A

material according to material instruction 58000-5-9950
surface: according to varnishing instruction 26304-5-9918
(colour: RAL 9006 white aluminium)
* This safety margin must be kept between all rings.
** These dimensions must be controlled by gauge.
Joint edges of the rings are welded
Dimensions for uncoated condition
Undimensioned bend radii R2.5



Tolerances	ebmpapst										
ISO 2768 -mK-E	ebm-papst Mulfingen GmbH & Co. KG										
Scale	Schutzgitter								Fit	Deviations	
1:1	Korb (Ansaug)				4	100173	05.10.18	ScT			
					3	64477	14.07.18	JE			
Size	35139-2-4039				2	57901	24.08.06	JE			
					1	46701	10.01.03	CW			
Distribution					Ind.	KM-Nr.	Date	Name			
					2D-CAD: 0102129				3D-CAD: 0102095		
									Sheet 1 of 1		