



Mini-Circuits®

CERAMIC BALUN

RF Transformer

NCS2-62+

50Ω 390 to 590 MHz 1:2 Ratio

FEATURES

- Low phase unbalance 5 deg. and amplitude unbalance, 0.5 dB typ.
- Miniature size 0805, 0.079"x0.049"x0.033"
- LTCC construction
- Low cost
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-9

APPLICATIONS

- VHF/UHF
- Signal process
- Instrumentation

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (Secondary/Primary)		2			
Frequency Range		390		2815	MHz
Insertion Loss ¹	460 - 470	—	0.6	1.0	dB
	390 - 590	—	0.8	—	
Amplitude Unbalance	460 - 470	—	0.5	1.0	dB
	390 - 590	—	0.8	—	
Phase Unbalance ²	460 - 470	—	3	8	Degree
	390 - 590	—	5	—	

1. Reference Demo Board TB-755+

2. Relative to 180°


MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power ³	2W at 25°C

3. Passband rating, derate linearly to 1W at 125°C ambient.

Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION J

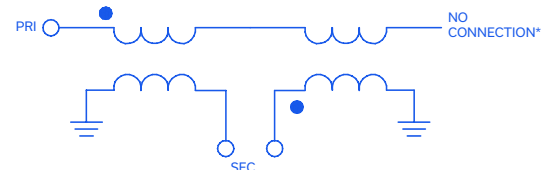

*Internal open circuit

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

 REV. C
 ECO-010420
 NCS2-62+
 MCL NY
 211112

PAGE 1 OF 3



Mini-Circuits®

CERAMIC BALUN

RF Transformer


NCS2-62+

PAD CONNECTIONS

PRIMARY DOT (Unbalanced Port)	4
PRIMARY (GND)	2,6
SECONDARY DOT (Balanced)	1
SECONDARY (Balanced)	3
NO CONNECTION	5


PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-755+ SUGGESTED PCB LAYOUT (PL-438)

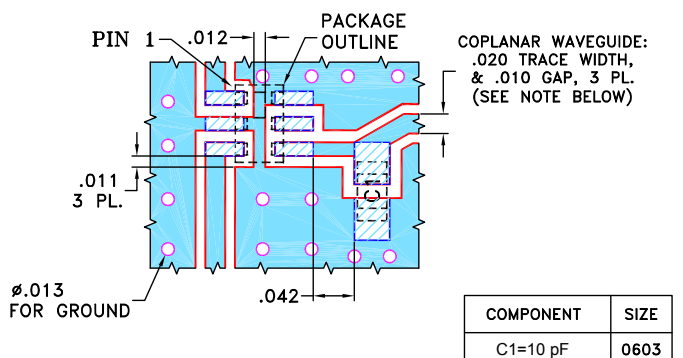

- NOTES:**
1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH THICKNESS .010" $\pm$.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
 2. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-755+.
 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

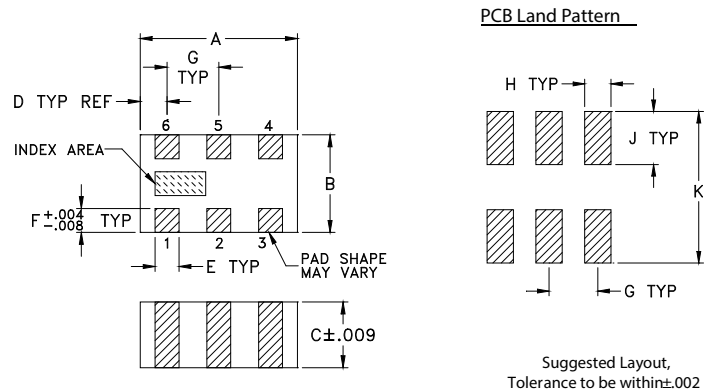

OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.0	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	




TAPE & REEL INFORMATION: F74

Mini-Circuits®

TYPICAL PERFORMANCE DATA³

Frequency (MHz)	Insertion Loss (dB)	Input Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
390	0.78	10.62	0.31	1.24
410	0.59	12.87	0.34	1.42
430	0.46	15.47	0.37	1.63
460	0.37	18.26	0.43	1.96
470	0.37	17.45	0.46	2.10
500	0.41	15.45	0.50	2.53
520	0.47	13.50	0.53	2.88
540	0.56	11.90	0.56	3.22
570	0.73	10.04	0.61	3.87
590	0.85	9.09	0.64	4.29

3. Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

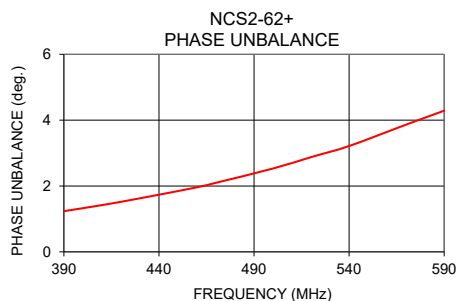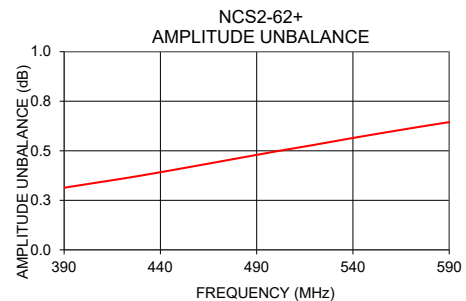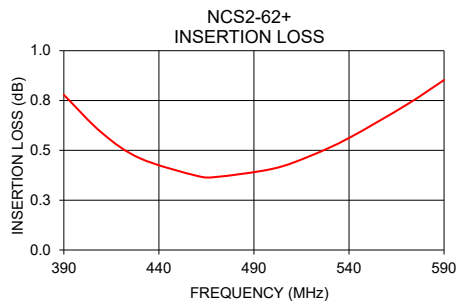

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[NCS2-62+](#)