

# X5 Frequency Multiplier

RMK-5-52+

50Ω      Output 250 to 500 MHz

## The Big Deal

- Low conversion loss, 22 dB typ.
- High harmonic suppression: F4, 56 dBc; F6, 57 dBc
- Small size, 0.25 x 0.31 x 0.16"



CASE STYLE: TT1224

## Product Overview

Mini-Circuits' RMK-5-52+ frequency multiplier provides a multiplication factor of 5 converting input frequencies from 50 to 100 MHz into output frequencies from 250 to 500 MHz, supporting applications including synthesizers, local oscillators, satellite up and down converters and more. This model supports input power of +17 dBm with conversion loss of 22 dB and excellent harmonic suppression. The multiplier comes housed in a miniature surface-mount package (0.25 x 0.31 x 0.16"), ideal for dense circuit board layouts.

| Feature                                                                                                          | Advantages                                                                                                            |
|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Low conversion loss, 22 dB                                                                                       | With a low conversion loss, the unit produces higher output power, reducing the need for amplification.               |
| Very good harmonic suppression <ul style="list-style-type: none"><li>• F4, 56 dBc</li><li>• F6, 57 dBc</li></ul> | Reduces spurious signals and the need for additional filtering                                                        |
| Low cost                                                                                                         | Provides an easy, cost-effective solution for generating high-frequency signals from a lower frequency signal source. |
| Small size                                                                                                       | Measuring only 0.25 x 0.31 x 0.16", the RMK-5-52+ saves space in crowded PCB layouts.                                 |

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# X5 Frequency Multiplier

50Ω Output 250 to 500 MHz

RMK-5-52+


## Maximum Ratings

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| Operating Temperature                                           | -40°C to 85°C  |
| Storage Temperature                                             | -55°C to 100°C |
| RF Input Power                                                  | 20 dBm         |
| Permanent damage may occur if any of these limits are exceeded. |                |

## Pin Connections

|        |         |
|--------|---------|
| INPUT  | 1       |
| OUTPUT | 4       |
| GROUND | 2,3,5,6 |


## Outline Drawing

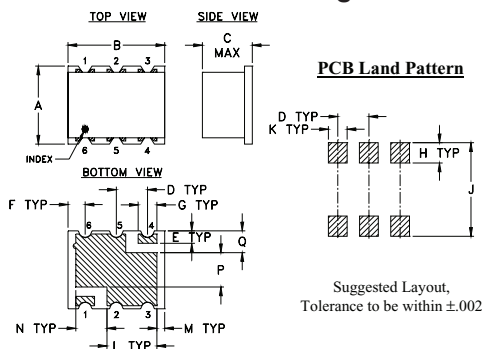

## Outline Dimensions (inch)

| A    | B    | C    | D    | E    | F    | G    | H     |
|------|------|------|------|------|------|------|-------|
| .25  | .31  | .16  | .100 | .040 | .055 | .060 | .065  |
| 6.35 | 7.87 | 4.06 | 2.54 | 1.02 | 1.40 | 1.52 | 1.65  |
| J    | K    | L    | M    | N    | P    | Q    | wt.   |
| .300 | .060 | .160 | .025 | .100 | .110 | .070 | grams |
| 7.62 | 1.52 | 4.06 | 0.64 | 2.54 | 2.79 | 1.78 | 0.16  |

## Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

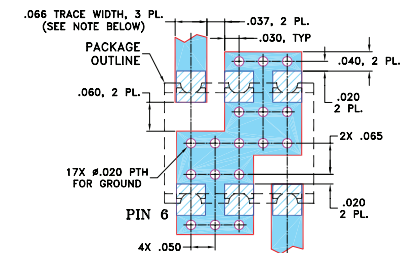

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Features

- low conversion loss, 22 dB typ.
- high rejection of adjacent harmonics, 56 dBc typ.
- aqueous washable

## Applications

- synthesizers
- local oscillators
- satellite up and down converters



Generic photo used for illustration purposes only  
CASE STYLE: TT1224

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

| Reel Size | Available Tape and Reel at no extra cost |
|-----------|------------------------------------------|
| 7"        | Devices/Reel                             |
| 13"       | 10, 20, 50, 100, 200                     |
|           | 500                                      |

## Electrical Specifications at 25°C

| Parameter                    | Min. | Typ. | Max. | Unit |
|------------------------------|------|------|------|------|
| Multiplier Factor            |      | 5    |      |      |
| Frequency Range, Input (F1)  | 50   | —    | 100  | MHz  |
| Frequency Range, Output (F5) | 250  | —    | 500  | MHz  |
| Input Power                  | —    | 17   | —    | dBm  |
| Conversion Loss              | —    | 22   | 26   | dB   |
| Harmonic Output*             |      |      |      | -dBc |
| F1                           | -8   | 2    | —    |      |
| F2                           | 40   | 63   | —    |      |
| F3                           | -12  | -2.5 | —    |      |
| F4                           | 40   | 56   | —    |      |
| F6                           | 40   | 57   | —    |      |
| F7                           | -1   | 6    | —    |      |

\* Harmonics of input frequency below the power level of F5








## Typical Performance Data

| Frequency   |              | Conv. Loss (dB) F5 | Harmonic Rejection Below F5, (dBc) at RF Input Power 17 dBm |        |       |        |        |       |
|-------------|--------------|--------------------|-------------------------------------------------------------|--------|-------|--------|--------|-------|
| Input (MHz) | Output (MHz) |                    | F1                                                          | F2     | F3    | F4     | F6     | F7    |
| 50.00       | 250.00       | 23.07              | -6.45                                                       | -67.76 | -0.52 | -58.93 | -57.16 | -2.62 |
| 55.00       | 275.00       | 22.66              | -5.39                                                       | -67.13 | 0.40  | -58.20 | -57.45 | -3.07 |
| 60.00       | 300.00       | 22.42              | -4.15                                                       | -66.99 | 1.16  | -57.78 | -58.29 | -4.13 |
| 65.00       | 325.00       | 21.86              | -3.35                                                       | -66.00 | 1.45  | -56.89 | -58.27 | -5.54 |
| 70.00       | 350.00       | 21.75              | -2.48                                                       | -65.07 | 2.35  | -56.43 | -57.84 | -5.08 |
| 75.00       | 375.00       | 21.82              | -1.30                                                       | -63.74 | 3.12  | -56.05 | -57.87 | -5.68 |
| 80.00       | 400.00       | 21.75              | -0.30                                                       | -63.04 | 3.62  | -55.86 | -58.08 | -5.99 |
| 85.00       | 425.00       | 21.83              | 0.70                                                        | -62.12 | 4.29  | -55.81 | -58.35 | -6.25 |
| 90.00       | 450.00       | 22.34              | 2.02                                                        | -60.36 | 4.99  | -55.38 | -58.69 | -7.00 |
| 95.00       | 475.00       | 24.04              | 4.28                                                        | -56.33 | 6.53  | -53.72 | -58.93 | -9.21 |
| 100.00      | 500.00       | 24.23              | 5.28                                                        | -55.31 | 6.91  | -53.43 | -59.31 | -9.51 |



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A  
M151107  
RMK-5-52+  
ED-14845  
AV/CP/AM  
200813  
Page 2 of 3

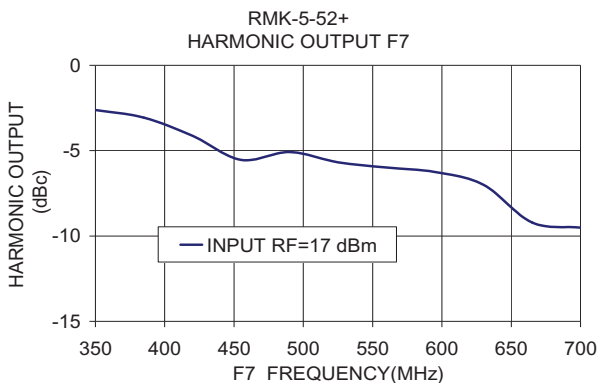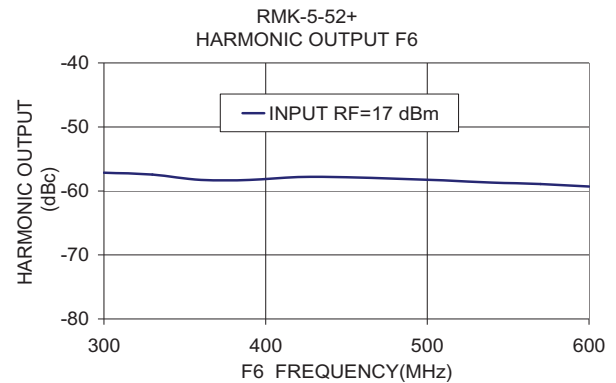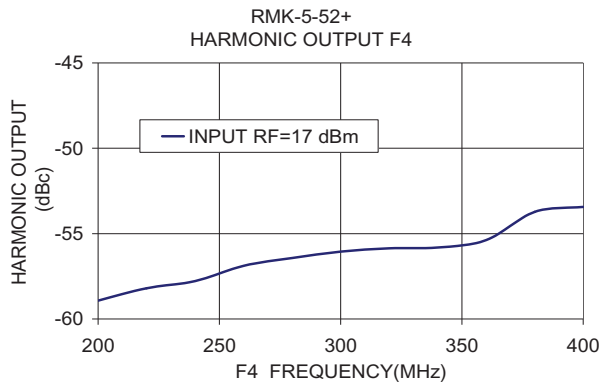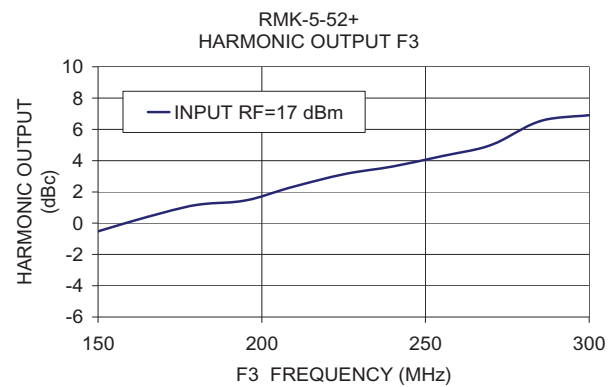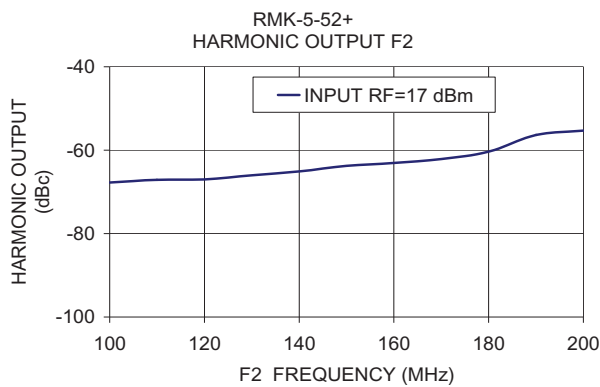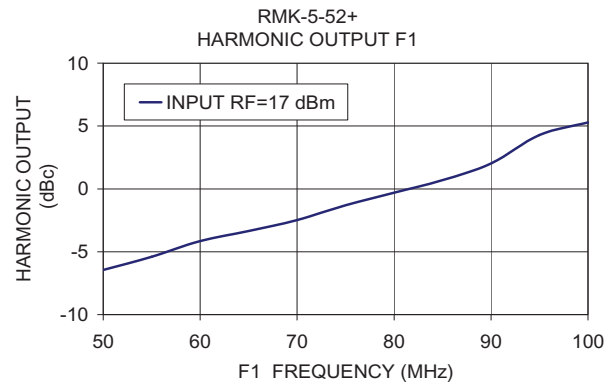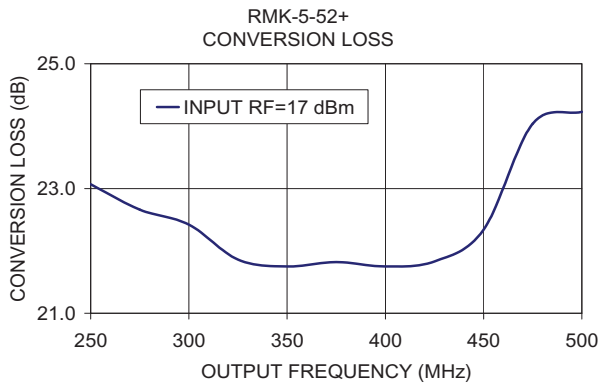

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[RMK-5-52+](#)