## Surface Mount

# Power Splitter/Combiner SBTC-2-25L+

2 Way-0°  $50\Omega$ 1000 to 2500 MHz

#### **Features**

- wide band frequency, 1000-2500 MHz
- excellent amplitude unbalance, 0.2 dB typ.
- small size, 0.166"x0.150"x0.155"
- temperature stable LTCC base
- small size
- low cost
- aqueous washable
- protected by US patent 6,963,255

#### **Applications**

- PCN/PCS
- DECT
- PHS





Generic photo used for illustration purposes only CASE STYLE: AT1029

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



#### **Electrical Specifications**

Parameter	Frequency (MHz)	Min.	Тур.	Max.	Unit
Frequency Range		1000		2500	MHz
	1000 - 2500	_	1.4	2.5	
Insertion Loss Above 3.0 dB	1400 - 1800	_	0.9	1.7	dB
	1800 - 2000	_	1.0	1.7	
	1000 - 2500	14	20	_	
Isolation	1400 - 1800	14	18	_	dB
	1800 - 2000	16	19	_	
	1000 - 2500	_	_	14	
Phase Unbalance	1400 - 1800	_	_	8	Degree
	1800 - 2000	_	_	8	
	1000 - 2500	_	_	1.2	
Amplitude Unbalance	1400 - 1800	_	_	0.7	dB
	1800 - 2000	_	_	0.8	

**Maximum Ratings** 

Parameter	Ratings		
Operating Temperature	-40°C to 85°C		
Storage Temperature	-55°C to 100°C		
Power Input (as a splitter)	1W max.		
Internal Dissipation	0.125W max		

Permanent damage may occur if any of these limits are exceeded.


#### **Pin Connections**

Function	Pin Number					
SUM PORT	6					
PORT 1	3					
PORT 2	4					
GROUND	1,2					
NOT USED	5					

#### **Electrical Schematic**




### **Outline Drawing**

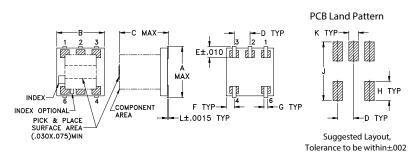

#### Outline Dimensions (inch )

В С D Е F G Α Н Κ L wt .166 .150 .155 .050 .037 .025 .012 .060 .184 .030 .004 grams 4.22 3.81 3.94 1.27 0.94 0.64 0.30 1.52 4.67 0.76 0.10 0.10

#### Demo Board MCL P/N: TB-274 Suggested PCB Layout (PL-152)

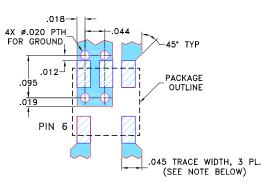



- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
  - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
    - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


#### **Typical Performance Data**

Frequency (MHz)	Total Loss¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1000	4.10	3.83	0.28	22.47	2.79	1.72	1.68	1.57
1100	4.07	3.85	0.21	21.47	2.54	1.66	1.59	1.51
1200	4.05	3.90	0.15	20.62	2.39	1.61	1.51	1.46
1300	4.01	3.93	0.08	19.92	2.34	1.56	1.45	1.41
1400	3.98	3.96	0.04	19.49	2.36	1.51	1.39	1.36
1500	3.96	4.00	0.05	19.21	2.47	1.47	1.33	1.32
1600	3.93	4.03	0.10	19.18	2.66	1.42	1.28	1.27
1700	3.90	4.06	0.16	19.29	2.92	1.37	1.24	1.23
1800	3.88	4.09	0.21	19.68	3.28	1.32	1.21	1.18
1900	3.86	4.12	0.27	20.37	3.70	1.26	1.19	1.14
2000	3.84	4.16	0.32	21.53	4.23	1.20	1.18	1.10
2100	3.83	4.21	0.37	23.36	4.87	1.13	1.18	1.08
2200	3.84	4.26	0.42	26.19	5.57	1.06	1.18	1.10
2300	3.88	4.34	0.46	28.88	6.36	1.09	1.18	1.15
2500	4.08	4.63	0.55	21.85	8.22	1.39	1.15	1.30

1. Total Loss = Insertion Loss + 3dB splitter loss







#### **Additional Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits: SBTC-2-25L+