

Surface Mount High Pass Filter

SCHF-31+

50Ω 31 to 1500 MHz

The Big Deal

- Low insertion loss
- High rejection
- Small size, 0.75 x 0.38 x 0.28"



CASE STYLE: YY161

Product Overview

SCHF-31+ is a 50Ω high pass filter fabricated using SMT technology. This high pass filter covers from 31-1500 MHz. This filter is built with high Q capacitors and wire wound inductors for superior performance. It has repeatable performance across lots and consistent performance across temperature. The unit comes housed in a miniature plastic package measuring just 0.75 x 0.38 x 0.28", ideal for dense circuit board layouts.

Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics for broad frequency band.
Small size, 0.75" x 0.38" x 0.28"	Accommodates tight space requirements for dense PCB layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount High Pass Filter

50Ω 31 to 1500 MHz

SCHF-31+



CASE STYLE: YY161


Features

- Low Insertion loss
- High Rejection
- Small size, 0.75 x 0.38 x 0.28"


Applications

- SATCOM
- Broadband fiber networks
- CATV
- Radio communications
- Receivers / transformer

Functional Schematic

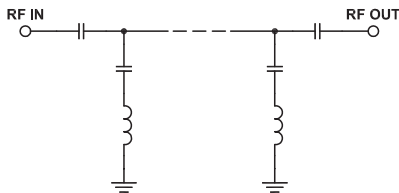

Typical Frequency Response

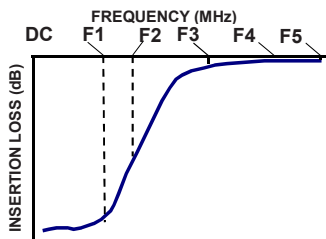

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	DC-20.5	40	50	dB
		F1-F2	20.5-23.5	20	26	dB
	VSWR	DC-F1	DC-23.5	-	20	:1
Pass Band	Insertion Loss	F3-F4	31-1000	-	0.5	dB
		F4-F5	1000-1500	-	0.9	dB
	VSWR	F3-F5	31-1500	-	1.3	:1

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	5W Max. @ 25°C





Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	75.00	1527.77
5.0	63.94	2310.54
20.5	48.01	140.05
23.0	31.52	84.16
23.5	28.62	74.50
24.0	25.82	64.53
25.0	20.41	46.43
27.0	10.26	15.44
28.0	5.89	7.03
28.5	4.14	4.66
29.0	2.79	3.16
30.0	1.25	1.69
31.0	0.74	1.13
35.0	0.47	1.25
50.0	0.23	1.06
250.0	0.21	1.13
500.0	0.29	1.16
1000.0	0.48	1.27
1250.0	0.60	1.28
1500.0	0.69	1.28

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

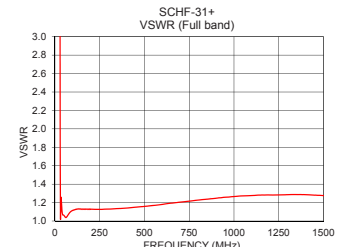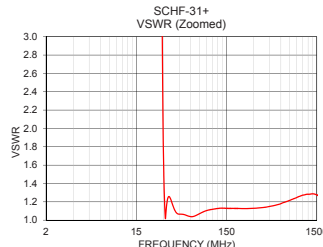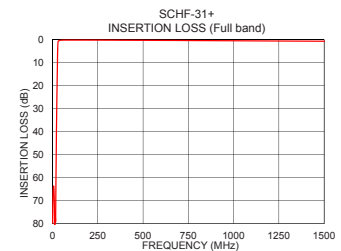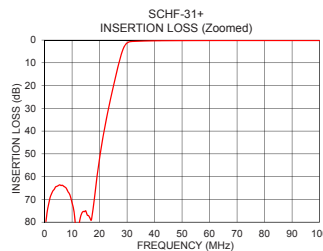

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M165986
SCHF-31+
EDU2768/1
URJ
180131
Page 2 of 3


Pad Connections


INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7

Demo Board MCL P/N: TB-187+
Suggested PCB Layout (PL-049)

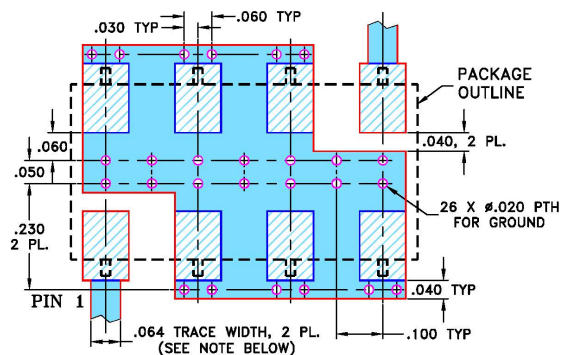


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" \pm .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Drawing

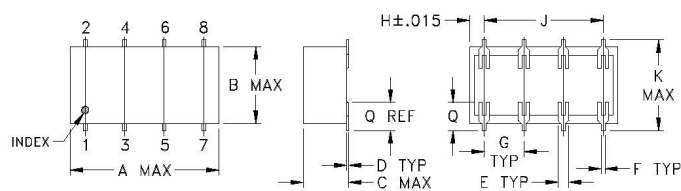

PCB Land Pattern

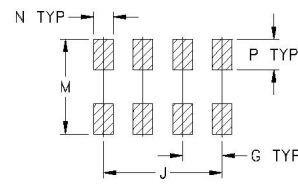

Suggested Layout
Tolerance to be within $\pm .002$

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	G	H
.750	.380	.280	.010	.050	.020	.200	.075
19.05	9.65	7.11	0.25	1.27	0.51	5.08	1.91
J	K	M	N	P	Q		Wt.
.600	.450	.470	.100	.150	.148		grams
15.24	11.43	11.94	2.54	3.81	3.76		1.6

Notes

Notes:

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SCHF-31+](#)