

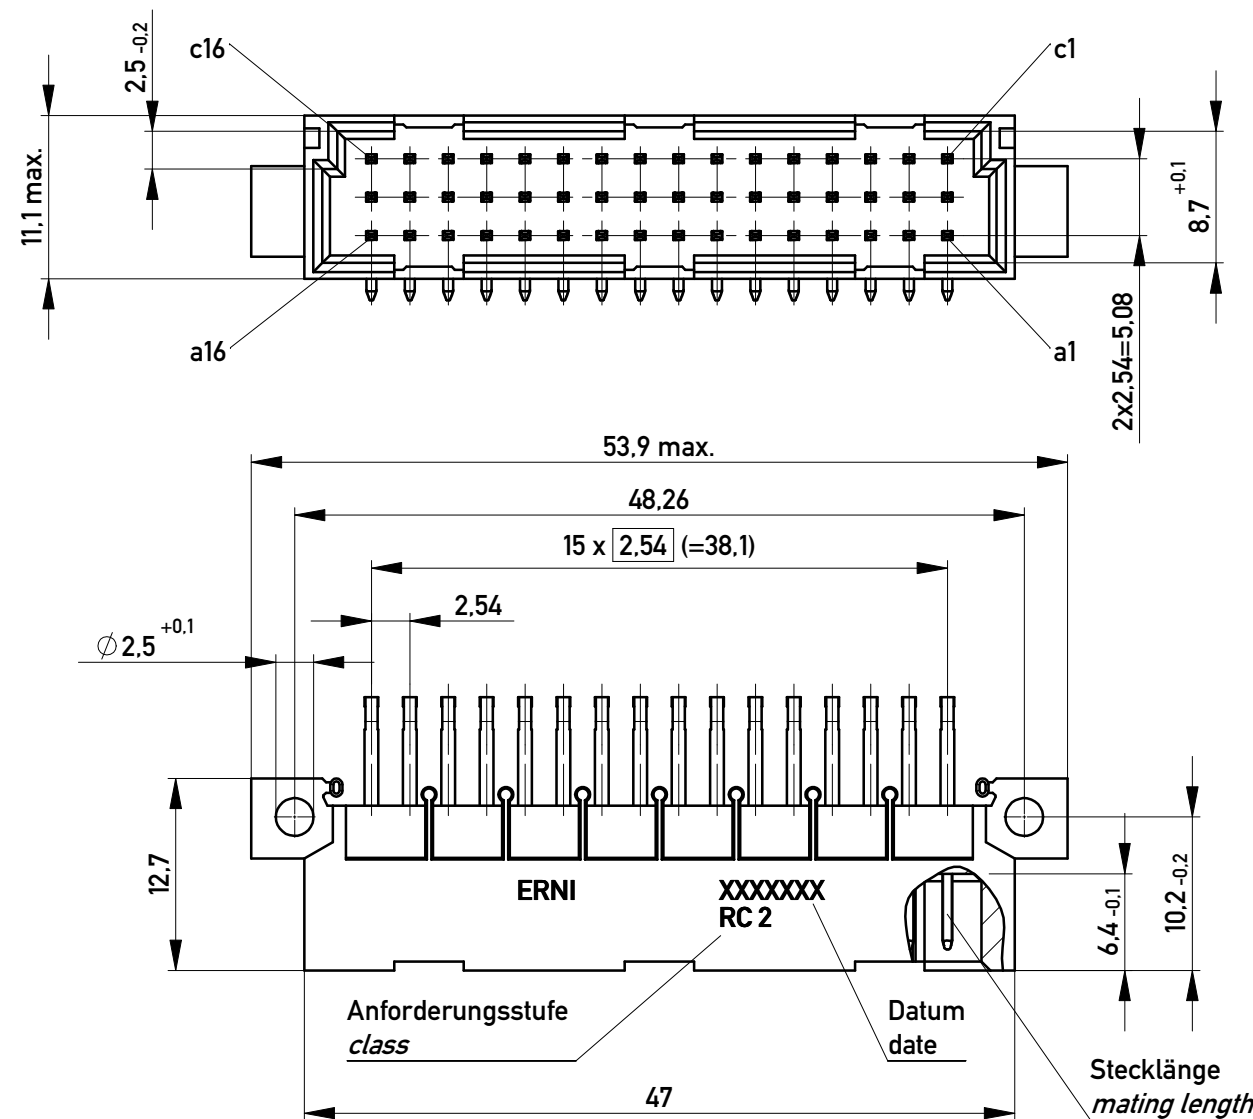


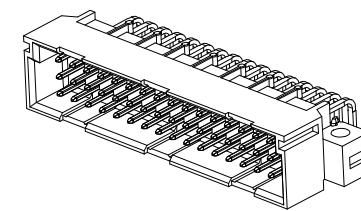

Stecklänge / mating length



E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend


THR = through hole reflow

Bauart 4 / type 4


Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2


Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

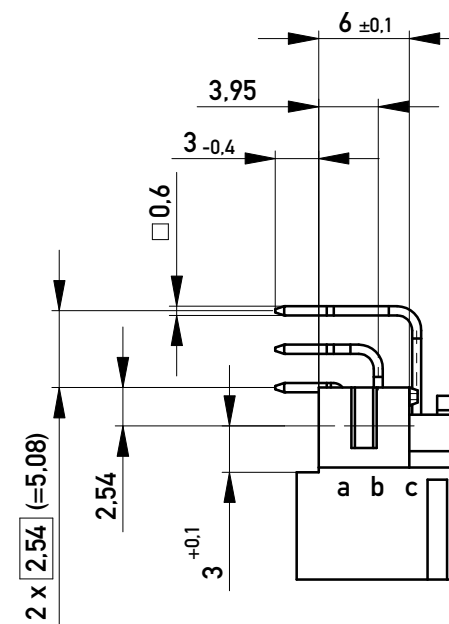



Bestückungsplan / contact layout

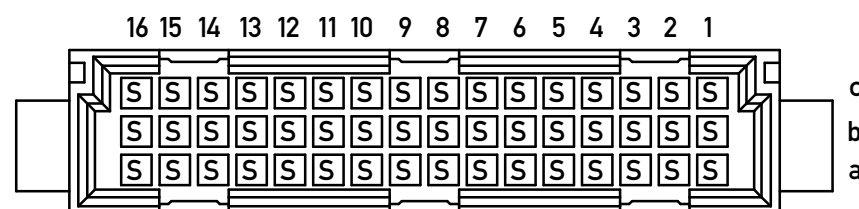

Leiterplatten- Lochbild / PCB drillhole pattern

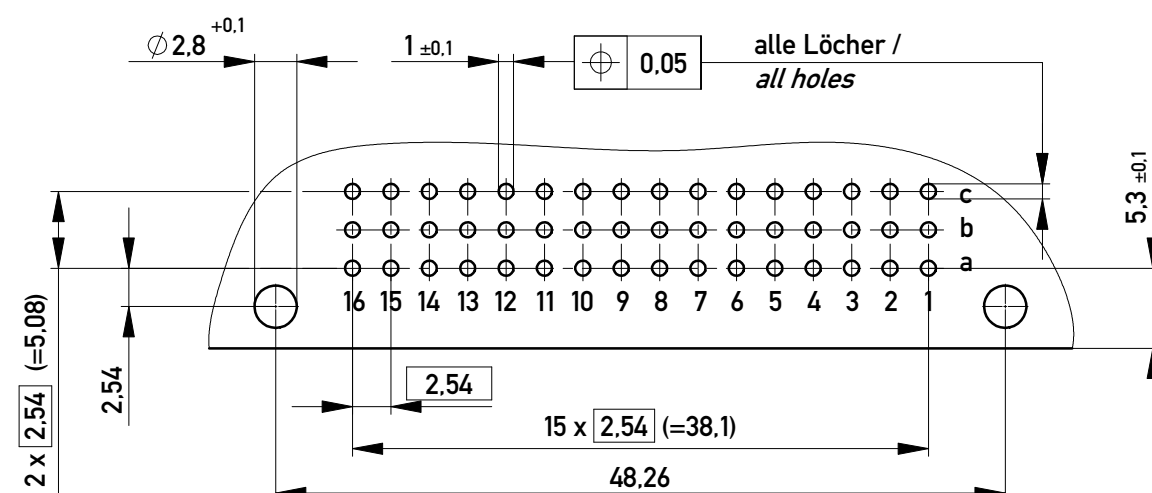


Verpackt in Gurtverpackung - Tape on Reel Packaging
Verpackungseinheit: 150 Stück - Packaging unit: 150 pcs

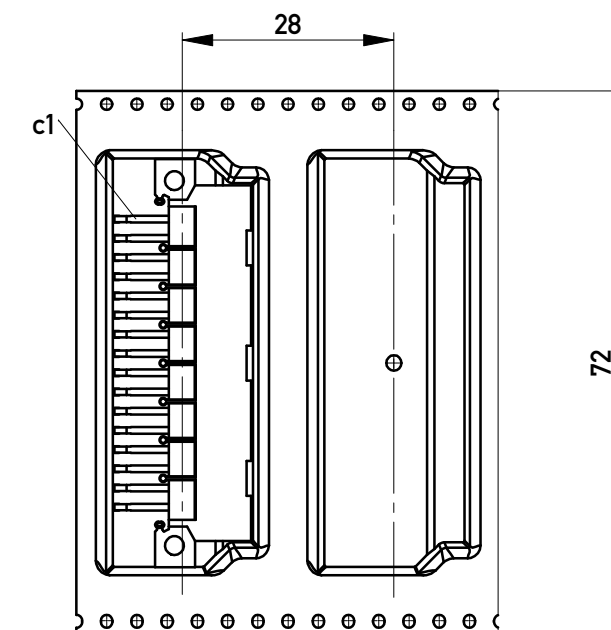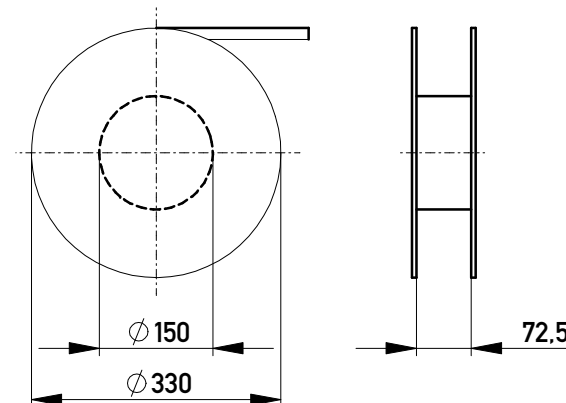

Abspulrichtung - Reel off Direction

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 2:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation			
								Messerleiste C/2 48 THR <i>Male Con.C/2 48 THR</i>			
										www.ERNI.com	
a		17.10.2013								A3	
Index		Date						Class		STVC/2	