

THE BIG DEAL

- Super Wideband, 10 to 8000 MHz
- Low Insertion Loss, 2.8 dB typ. up to 8 GHz
- Amplitude Unbalance, ± 0.9 dB typ. up to 6 GHz
- Good Input Return Loss, 10 dB typ.
- Low Phase Unbalance, $\pm 9^\circ$ typ.
- Common Mode Rejection, 20 dB typ.



Generic photo used for illustration purposes only

CASE STYLE: SN2595

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS


- Defense Communication
- Defense Radar
- Line of sight links
- PCS
- Cellular
- Wideband push-pull amplifiers
- ADC (Analog to Digital Converter)
- Balanced Receivers

PRODUCT OVERVIEW

Mini-Circuits' SCTX1-83-2W+ is a surface-mount transmission line transformer (core and Semi-Rigid cable) covering a very wide frequency range from 10 to 8000 MHz. The transformer provides low insertion loss with excellent phase and amplitude performance. Featuring core and cable construction on a 12-lead PCB unit measures 0.60 x 0.60 x 0.15" accommodating dense circuit board layouts.

KEY FEATURES

Feature	Advantages
Wideband, 10 to 8000 MHz	Super wide frequency range covers bandwidth requirements for many broadband applications.
Low insertion loss, 2.8 dB	SCTX1-83-2W+ provides excellent signal transmission from input to output with consistent performance across its entire frequency range.
Good Phase and Amplitude Unbalance	Provides good CMRR and IP2.
Small size (0.60 x 0.60 x 0.15")	Provide good solderability and tight layouts.



ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)		1			
Frequency Range		10		8000	MHz
Insertion Loss (Average)	10 - 3000	—	1.9	2.8	dB
	3000 - 6000	—	2.8	3.9	
	6000 - 8000	—	3.9	4.9	
Amplitude Unbalance (±)	10 - 3000	—	0.3	0.6	dB
	3000 - 6000	—	0.6	1.1	
	6000 - 8000	—	0.9	1.5	
Phase Unbalance (±)	10 - 3000	—	3	6	Degree
	3000 - 6000	—	5	9	
	6000 - 8000	—	9	12	
Common mode rejection	10 - 4500	20	25	—	dB
	4500 - 8000	16	20	—	


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	2W

Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION G

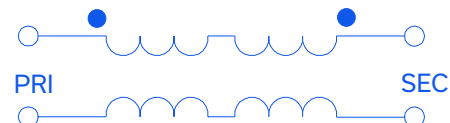



Mini-Circuits

SURFACE MOUNT

RF Transformer


SCTX1-83-2W+

50Ω 10 to 8000 MHz 1:1 Ratio

PIN CONNECTIONS

PRIMARY DOT	12
PRIMARY (GND)	11
SECONDARY DOT	3
SECONDARY	4
GROUND	ALL OTHERS


PRODUCT MARKING: N/A

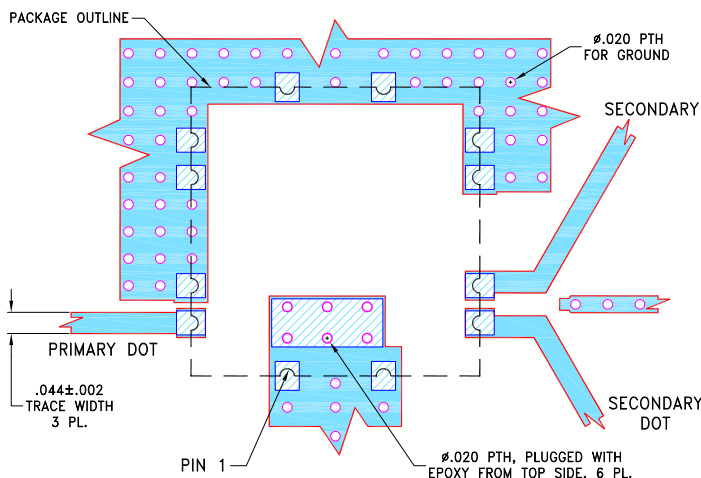DEMO BOARD MCL P/N: TB-SCTX1-83-2W+
SUGGESTED PCB LAYOUT (PL-595)

NOTES:


- TRACE WIDTH IS SHOWN FOR ROGERS R04350B, WITH DIELECTRIC THICKNESS .020"±.0015". COPPER: 1/2 Oz. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

OUTLINE DRAWING

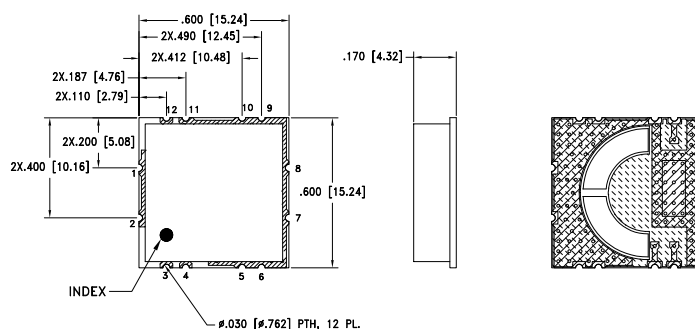

TOP VIEW

BOTTOM VIEW

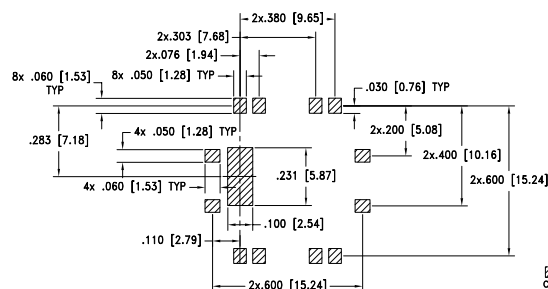PCB LAND PATTERN
SUGGESTED LAYOUT
TOLERANCE TO BE WITHIN ±.002

Weight: 1.2 gram


Dimensions are in inches [mm]. Tolerances: 3 PL ±.005 Inch

TAPE & REEL INFORMATION: F95

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 3 OF 4



Mini-Circuits

SURFACE MOUNT





RF Transformer

SCTX1-83-2W+

50Ω 10 to 8000 MHz 1:1 Ratio

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Input Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
10	1.13	19.06	0.04	1.62
100	1.16	19.26	0.04	0.23
500	1.18	18.54	0.00	0.07
1000	1.25	15.62	0.00	0.02
2000	1.35	12.91	-0.11	0.23
3800	1.68	16.99	0.11	1.70
5000	2.63	7.52	0.42	2.44
6000	2.79	6.34	-0.12	3.56
7000	1.97	10.86	-0.63	1.47
8000	2.20	14.72	-0.67	1.90

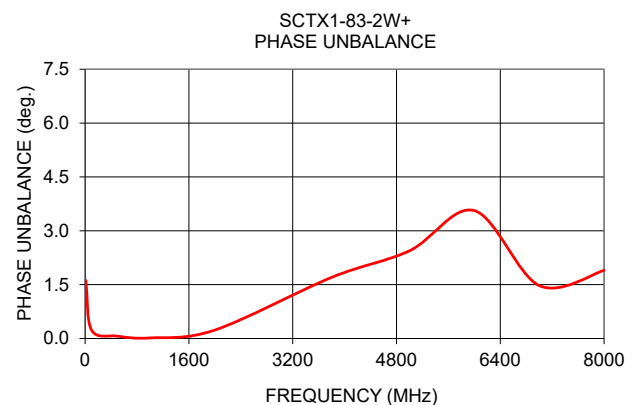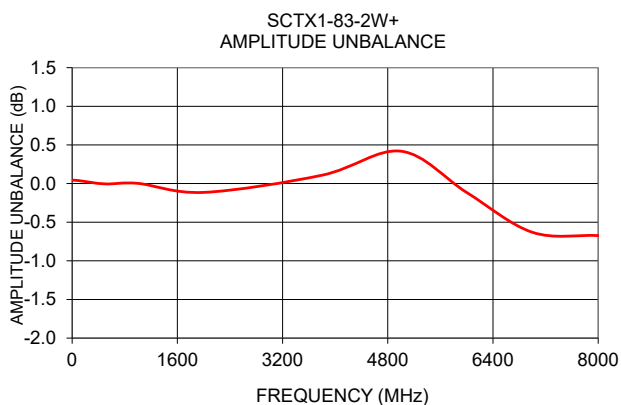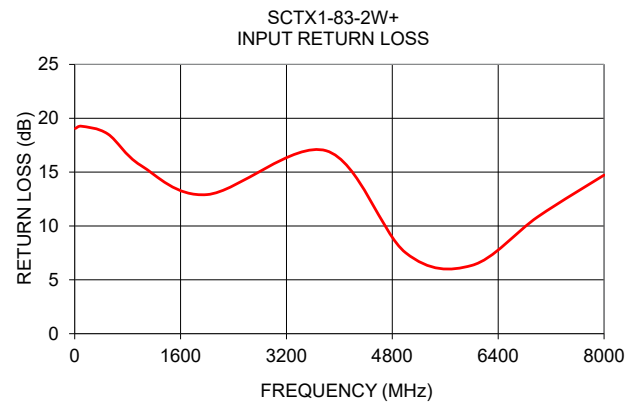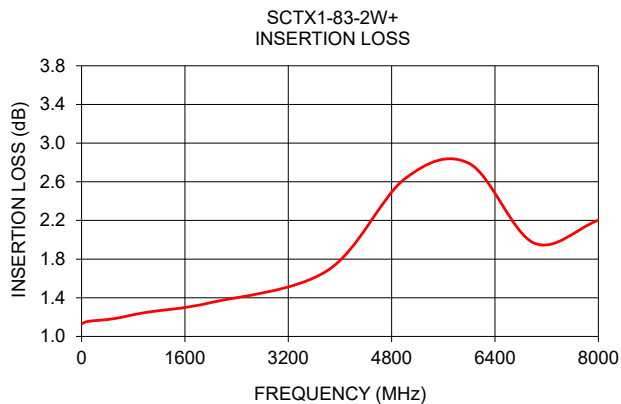

- NOTES**
- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 - Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 - The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SCTX1-83-2W+](#)