

Surface Mount Voltage Variable Attenuator

SVA-2000+

50Ω 50 to 2000 MHz

Maximum Ratings


Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage(V+)	7V
Absolute Max. Control Voltage(Vctrl)	15V
Absolute Max. RF Input Level	+17dBm

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	8
RF OUT	1
V CONTROL	4
V+	11
GROUND	2,3,5,6,7,9,10,12


Outline Drawing

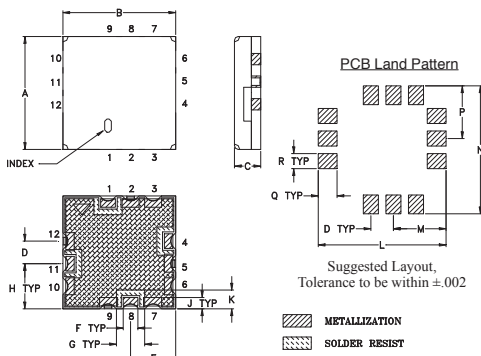

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.300	.300	.100	.060	.120	.039	.075	.120	.030
7.62	7.62	2.54	1.52	3.05	0.99	1.91	3.05	0.76
K	L	M	N	P	Q	R		wt.
.050	.340	.140	.340	.140	.050	.040		grams
1.27	8.64	3.56	8.64	3.56	1.27	1.02		.25

Demo Board MCL P/N: TB-457+
Suggested PCB Layout (PL-277)

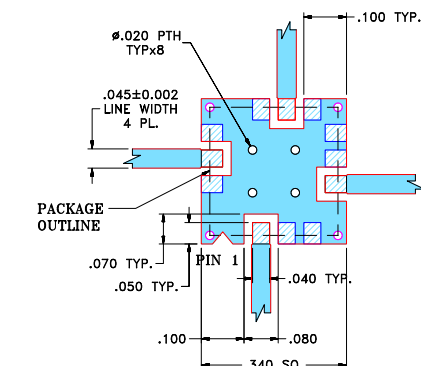

- NOTES:
1. TRACE WIDTH IS SHOWN FOR RF4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Frequency range, 50-2000 MHz
- Low insertion loss, 1.6dB typ.
- Maximum attenuation at minimum current
- No external bias and RF matching network required
- Small size, 0.3" x 0.3" x 0.1"
- Shielded case
- Aqueous washable



CASE STYLE: FZ990

Applications

- CATV
- Power level control
- Feed forward amplifiers

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Electrical Specifications (T_{AMB} = 25°C)

FREQ. (MHz)		MIN. INSERTION LOSS, dB (+12V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3 (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
Min.	Max.	Typ.	Max.	Typ.	Min.	Max.			Typ.			Max.
50 - 500		1.5	2.0	35	26	+17	0 - 12	5	38	23	+5	2
500 - 1000		1.6	2.2	29	21	+17	0 - 12	5	44	21	+5	2
1000 - 2000		1.9	2.6	23	15	+17	0 - 12	5	47	20	+5	2


Notes:

Rise/Fall time: 15μSec/19μSec Typ.
Switching Time, turn on/off: 20μSec. Typ.

Equivalent Schematic

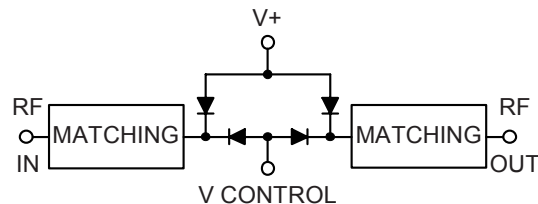

SVA-2000+ TYPICAL ATTENUATION AT 1000 MHz

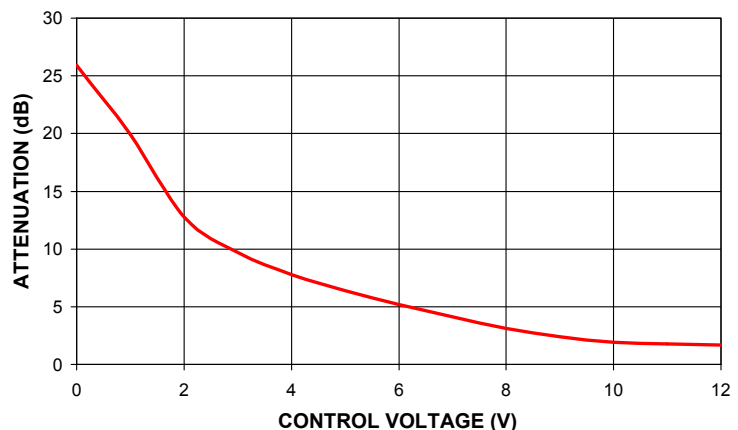

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151108
EDR-6631/3F1
SVA-2000+
RAV
161211
Page 1 of 2


**SVA-2000+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES**

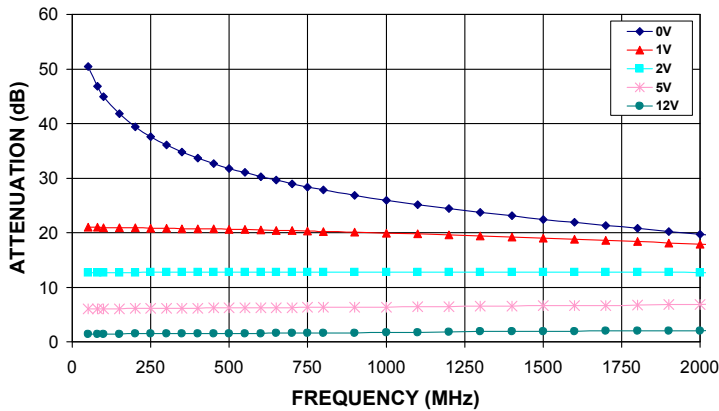


**SVA-2000+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 1000MHz**

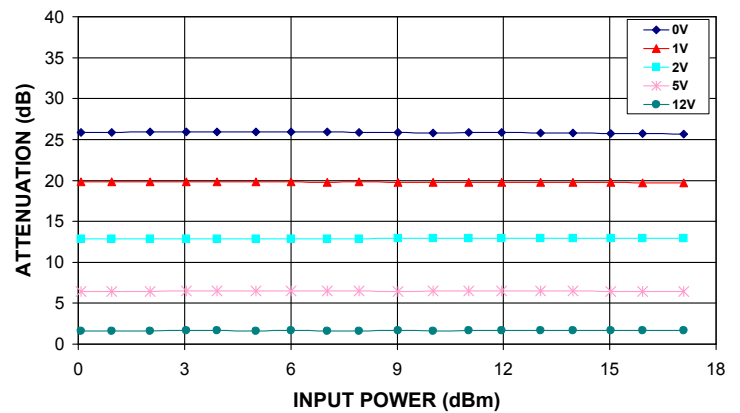


**SVA-2000+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES**

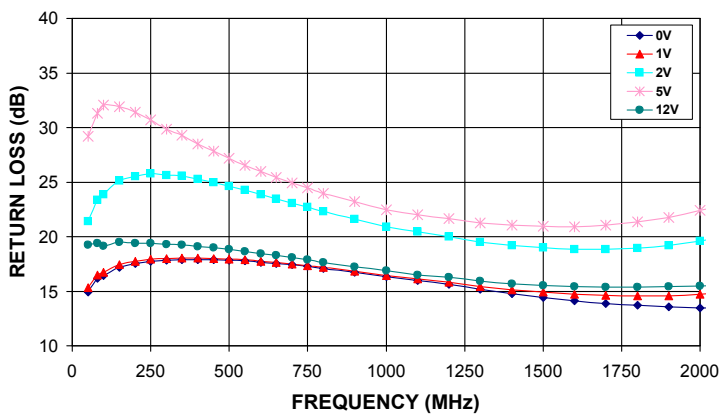


**SVA-2000+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES**

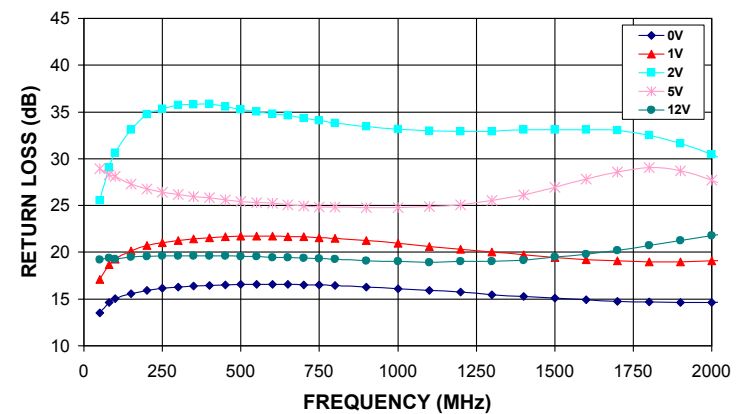

**SVA-2000+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES**

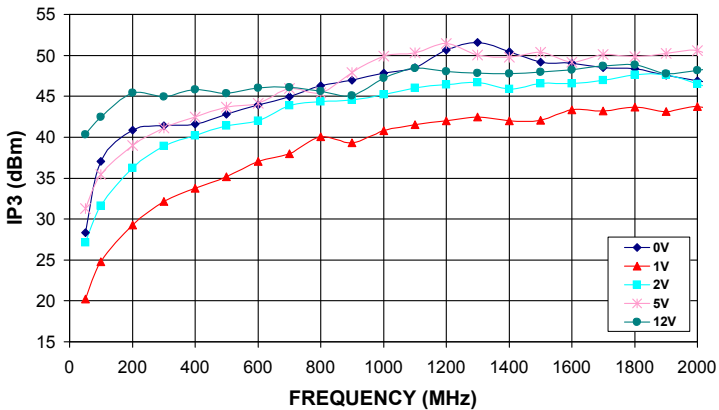

**SVA-2000+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES**

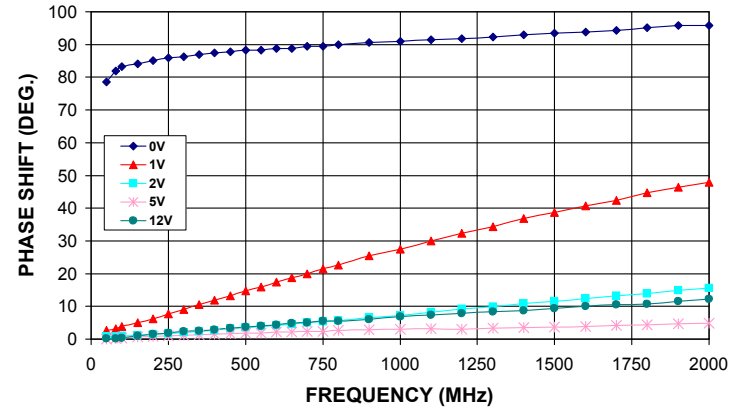

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SVA-2000+](#)