



Mini-Circuits

SURFACE MOUNT 

RF Transformer

TC1-1-13M-75X+

75Ω 4.5 to 3000 MHz

FEATURES

- Wideband, 4.5 to 3000 MHz
- Balanced transmission line
- Good return loss
- Excellent amplitude unbalance, 0.7 dB typ. and phase unbalance, 2 deg typ. in 1 dB bandwidth
- Plastic base with leads
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT1521

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio			1		Ohm
Frequency Range		4.5		3000	MHz
Insertion Loss*	2000 - 3000		3.0		dB
	1000 - 2000		2.0		
	4.5 - 1000		1.0		
Amplitude Unbalance	1000 - 2000		0.5		dB
	4.5 - 1000		0.7		
Phase Unbalance	1000 - 2000		3.0		Degree
	4.5 - 1000		2.0		


* Insertion Loss is referenced to mid-band loss, 0.5 dB typ.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. G

REV. B
ECO-021678
TC1-1-13M-75X+
MCL NY
240501



Mini-Circuits

SURFACE MOUNT 

RF Transformer


TC1-1-13M-75X+

75Ω 4.5 to 3000 MHz

PIN CONNECTIONS

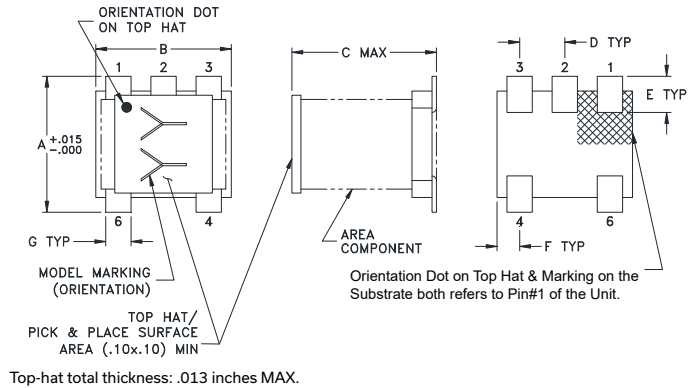
Function	Pin Number
PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

PRODUCT MARKING: CN


DEMO BOARD MCL P/N: TB-145+
SUGGESTED PCB LAYOUT PL-244

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" $\pm$.0015"; COPPER: 1/2 OZ. ON EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 3. THIS PAD IS NOT REQUIRED FOR AT224 CASE STYLE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING



PCB Land Pattern

Suggested Layout,
Tolerance to be within $\pm$.002

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	G	H	J	K
.150	.150	.160	.050	.040	.025	.028	.065	.190	.030
3.81	3.81	4.06	1.27	1.02	0.64	0.71	1.65	4.83	0.76

Weight: 0.15 grams

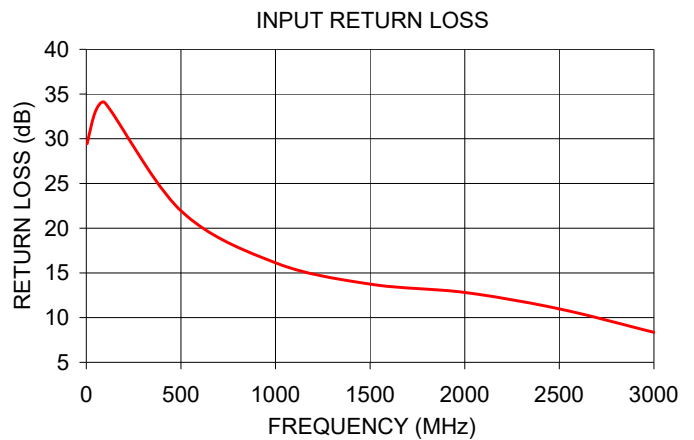
TAPE & REEL INFORMATION: F17

Mini-Circuits



TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
4.50	0.31	29.45	1.10	5.08
10.00	0.29	29.98	0.90	2.60
50.00	0.30	33.14	0.88	0.06
100.00	0.33	34.00	0.91	0.32
500.00	0.55	21.95	0.65	0.81
1000.00	0.71	16.13	0.61	2.12
1500.00	0.96	13.75	0.21	1.23
2000.00	1.19	12.82	0.30	0.38
2500.00	1.63	10.98	0.47	4.03
3000.00	2.39	8.36	0.49	8.50



NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TC1-1-13M-75X+](#)