



Mini-Circuits

BALANCED TO UNBALANCED



RF Transformer

TC1.33-182X-75+

100 to 75Ω 5 to 1800 MHz

THE BIG DEAL

- Suitable for tin/lead and RoHS solder systems
- Wideband, 5 to 1800 MHz
- Balanced transmission line
- Good return loss, 20 dB typ. at 1 dB band
- Excellent amplitude unbalance, 0.4 dB typ. and phase unbalance, 5° typ.
- Aqueous washable

*Generic photo used for illustration purposes only*

CASE STYLE: AT1521

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Balanced to unbalanced transmission
- Push-pull amplifiers
- PCS/DCS
- Cable TV
- Cellular
- DOCSIS 3.1

PRODUCT OVERVIEW

The TC1.33-182X-75+ is a balanced-to-unbalanced 75Ω transmission line transformer. This rugged, wire welded, rectangular core with top hat design is rated for up to 0.25W maximum power, in an aqueous washable case suitable for both RoHS and tin/lead solder systems.

KEY FEATURES

Feature	Advantages
Very wide bandwidth	50-1800 MHz bandwidth covers CATV (forward & return), medical wireless and D2A/A2D, and other communications applications
Excellent amplitude and phase unbalance	0.4 dB amplitude and 5° phase unbalance aid rejection of even harmonics (in push-pull amplifiers) and common mode signals (when used as a balun)
Good return loss	Provides excellent matching for 75Ω circuitry
Low and flat insertion loss	Consistently low signal loss, ±0.2dB across all 100-1218 MHz CATV bands

REV. A
ECO-021661
TC1.33-182X-75+
MCL NY
240501





Mini-Circuits

BALANCED TO UNBALANCED



RF Transformer

TC1.33-182X-75+

100 to 75Ω 5 to 1800 MHz

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (secondary/primary)			1.33		Ohm
Frequency Range		5	—	1800	MHz
Insertion Loss*	5 - 1800	—	1.2	2.3	dB
Amplitude Unbalance	5 - 1200	—	0.4	1.0	dB
	1200 - 1800	—	1.3	2.1	
Phase Unbalance	5 - 1800	—	5	10	Degree


* Insertion Loss is referenced to mid-band loss, 1.0 dB typ. Measured in 75Ω system.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. M1

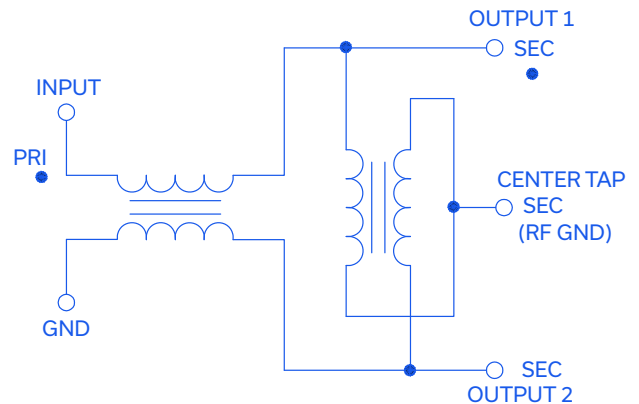



Mini-Circuits

BALANCED TO UNBALANCED



RF Transformer

TC1.33-182X-75+


100 to 75Ω 5 to 1800 MHz

PIN CONNECTIONS


Function	Pin Number
PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2

PRODUCT MARKING: HZ

OUTLINE DRAWING

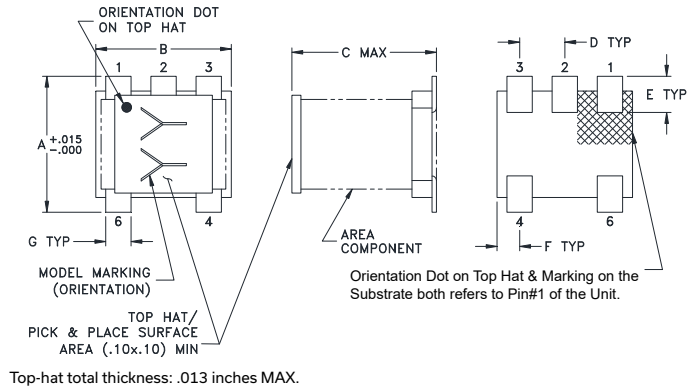

PCB Land Pattern



Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F	G	H	J	K
.150	.150	.160	.050	.040	.025	.028	.065	.190	.030
3.81	3.81	4.06	1.27	1.02	0.64	0.71	1.65	4.83	0.76

Weight: 0.15 grams

TAPE & REEL INFORMATION: F17





Mini-Circuits

BALANCED TO UNBALANCED





RF Transformer

TC1.33-182X-75+

100 to 75 Ω 5 to 1800 MHz

TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
5	1.27	20.27	0.01	0.04
60	1.08	28.36	0.02	0.49
100	1.08	28.58	0.03	0.62
300	1.07	27.44	0.09	2.01
500	1.04	25.55	0.13	2.79
700	1.05	22.81	0.09	3.26
1000	1.12	19.08	0.07	3.06
1200	1.24	17.37	0.27	2.36
1500	1.52	15.83	0.63	0.75
1800	1.95	14.67	1.09	1.40

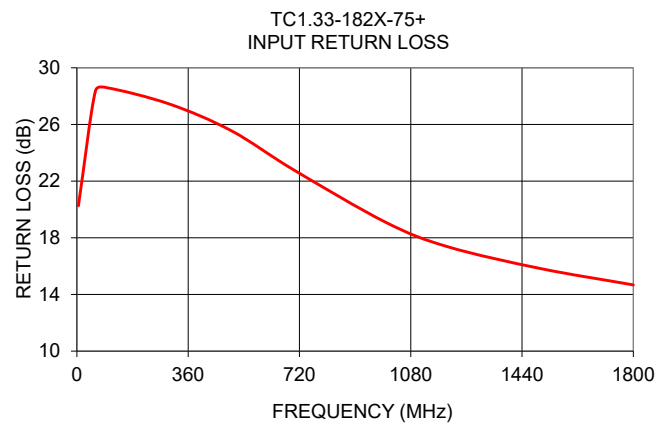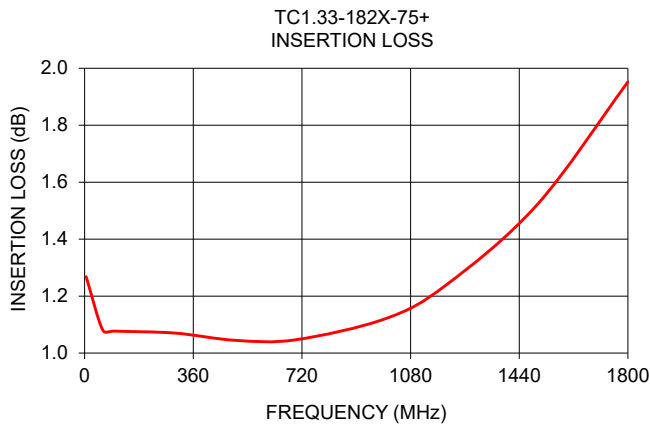

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TC1.33-182X-75+](#)