Connectors

FO single connectors with glass fibres

Identification	Part-Number	Drawing	Dimensions in mm
FO connectors			
for GI-fibre 50-62.5/125 mm F-SMA type for cable Ø 2.8 mm	20 10 125 1212	F-SMA type 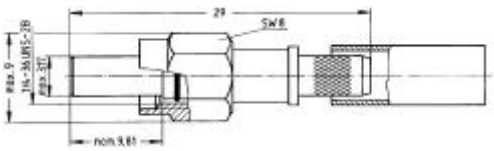	The ferrule of the FO connector for GI-fibre is ceramic
FH-ST type for cable Ø 2.8 mm	20 10 125 2212		
for SI-fibre (HCS)[1)] 200/230 mm F-SMA type for cablel Ø 2.8 mm	20 10 230 1212	FH-ST type 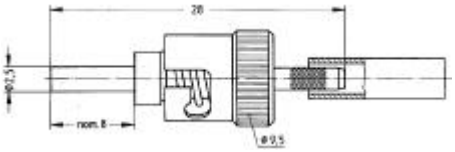	Insertion loss: F-SMA GI/SI < 1.0 dB FH-ST GI/SI < 0.5 dB
FH-ST type for cable Ø 2.8 mm	20 10 230 2212		
Versatile Link type for cablel Ø 2.2 mm	20 10 230 7111		
Coupling sleeve			
F-SMA type	20 80 000 1071		F-SMA connector and coupling sleeve acc. to IEC 874-2
FH-ST type	20 80 000 1021		FH-ST connector and coupling sleeve acc. to IEC 874-10 CECC 86123-801

[1)] HCS® (=Hard Clad Silica) is registered trade mark of SpecTran Corporation