

# Surface Mount RF Transformer

50Ω 10 to 4000 MHz

## TCM2-43X+

### Features

- wide bandwidth 10 to 4000 MHz
- balanced transmission line
- excellent return loss
- aqueous washable

### Applications

- PCS
- wideband push-pull amplifiers
- cellular



Generic photo used for illustration purposes only

CASE STYLE: DB1627

**+RoHS Compliant**


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio ( <i>secondary/primary</i> )			2		Ohm
Frequency Range		10		4000	MHz
Insertion Loss	10 - 4000	—	1.3	3.0	dB
Amplitude Unbalance	10 - 4000	—	0.5	—	dB
Phase Unbalance	10 - 4000	—	7	—	Degree

### Electrical Schematic

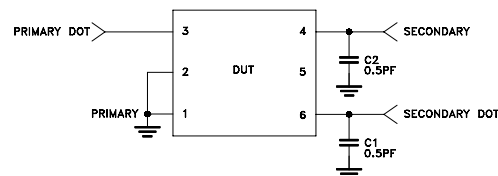

### Maximum Ratings


Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.4W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

Function	Pin Number
PRIMARY DOT	3
PRIMARY	1,2
SECONDARY DOT	6
SECONDARY	4
GND	1,2
NOT USED	5

### Product Marking




### Config. K

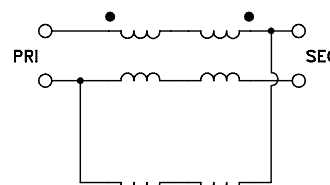

# TCM2-43X+


## Outline Drawing

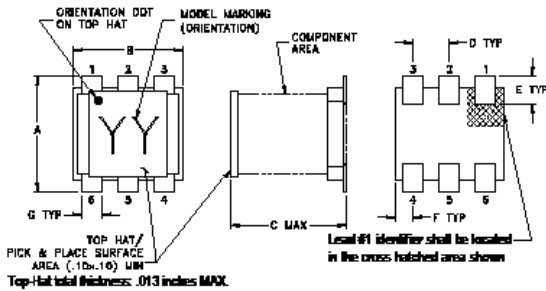


## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

## PCB Land Pattern



Demo Board MCL P/N: TB-676+  
Suggested PCB Layout (PL-380)



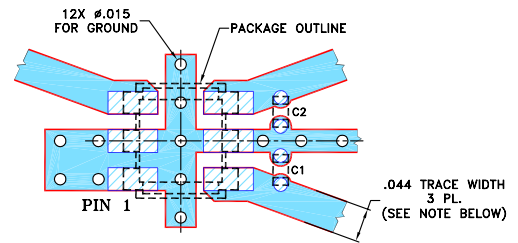


COMPONENT	SIZE
C1, C2	0402

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-676+.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Input R. Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (Deg.)
10	1.88	15.46	0.08	0.74
100	1.76	15.22	0.03	1.07
500	1.61	14.98	0.24	4.40
1000	1.35	15.87	0.32	5.96
1500	1.17	17.86	0.09	6.73
2000	1.09	21.30	0.23	7.01
2500	1.11	24.93	0.52	7.71
3000	1.17	25.06	0.82	6.95
3500	1.26	23.10	0.79	5.04
4000	1.55	16.24	0.81	3.16

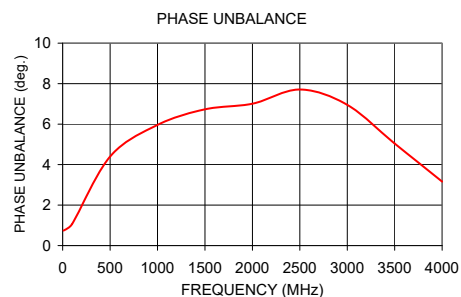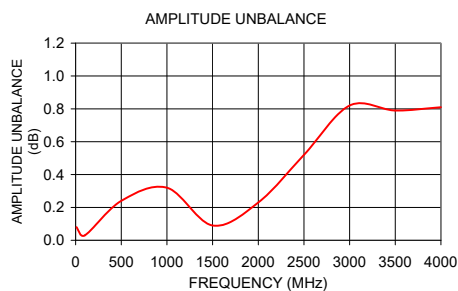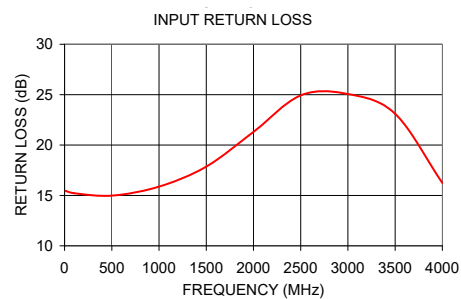

## Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TCM2-43X-2+](#)