

5

4



3

2

1

Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

No. 1 contact


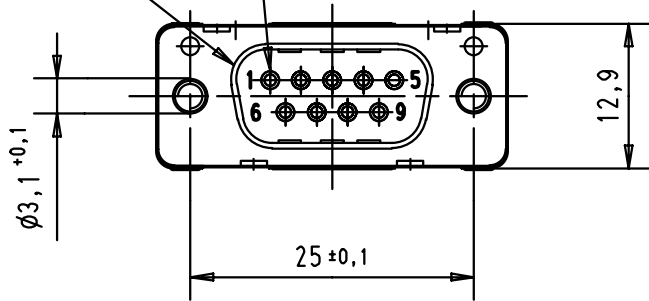


Printed board layout(1,6±0,2 thick)

View component side

(PCB plating = Tin)

No. 1 contact

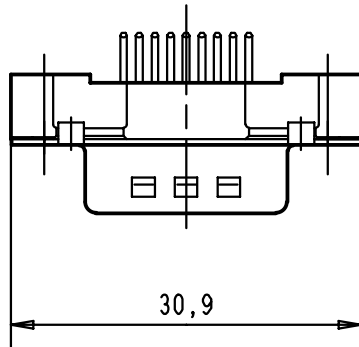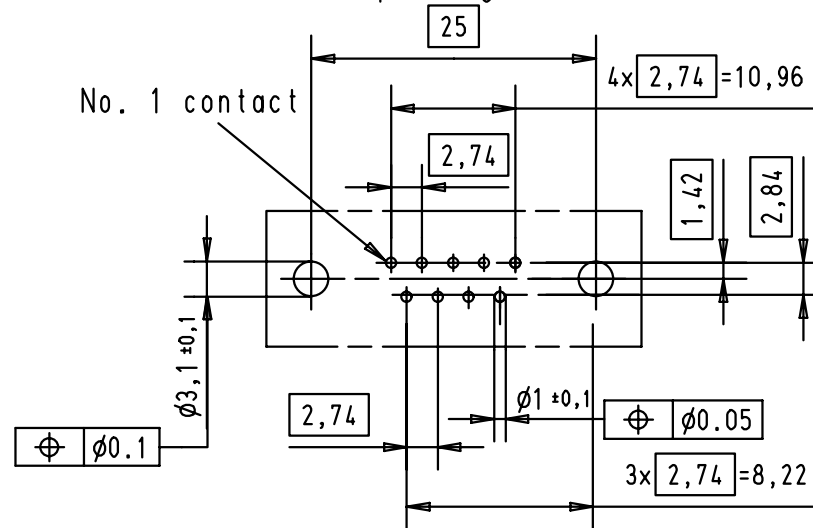

09 66 121 6701	M3	2						Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub male straight 9 poles with solder pins and nuts	Maßstab/ Scale 1,5:1
09 66 121 7701	M3	3					Detail.	8-NOV-01	JB			
09 66 121 5701	M3	0,76 µm Au					Insp.					
09 66 121 6702	4-40 UNC	2					Stand.					
09 66 121 7702	4-40 UNC	3						HARTING EURL F-95972 Paris			TB 09 66 121 X70X	Blatt/ Page 1
09 66 121 5702	4-40 UNC	0,76 µm Au	29737	8-NOV-01	JB							
Part number	nut thread	Performance level	Mod.	Dat.	Name						Sub.	

09 66 121 6701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 5702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 5701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level S4
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.



Data sheets are available in following formats
2D files

Typenblatt

Typenblatt

09 66 121 6702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 2
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 7701
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	M 3
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF

09 66 121 7702
D-Sub - S PCB connector

Other applications

gender	male connector, straight
Termination	Turned solder pins
shell	tinned metal shell with dimples
Number of contacts	9 way
Board fixing	without grounding board locks
flange	UNC4-40
Performance level	Performance level 3
Material	PBTP

Note: Obligatory information about HARTING products can be obtained exclusively from the data sheets.

Inquiry

The data sheet is up to date

2D files

PDF

DXF