

Ceramic Balun RF Transformer

50Ω 3300 to 3900 MHz 1:2 Ratio

Features

- wideband, 3300 to 3900 MHz
- miniature size 0603 (1.6x0.8mm)
- LTCC construction
- low cost

Applications

- LTE
- 5G
- A/D conversion

TCW2-392+



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 4000

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (Secondary/Primary)			2		
Frequency Range		3300	—	3900	MHz
Insertion Loss ¹ (Sds 21)	3300-3900	—	0.8	1.3	dB
Amplitude Unbalance	3300-3900	—	0.5	1.5	dB
Phase Unbalance ²	3300-3900	—	5	14	Degree
VSWR	3300-3900	—	1.35	—	:1

1. Reference demo board TB-912+.

2. Relative to 180°

Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 105°C
Storage Temperature	-55°C to 105°C
RF Power ³	2W


3. Passband rating

Permanent damage may occur if any of these limits are exceeded.


Pad Connections

Function	Pin Number
PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND) or DC FEED + RF GND	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	3
NO CONNECTION	6
NOT USED (GND EXTERNALLY)	5
PADS 2,3,4 are DC-connected Internally	

Configuration R

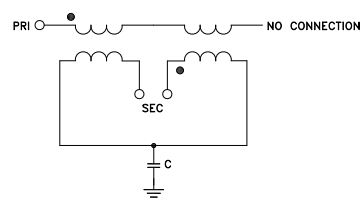

Outline Drawing

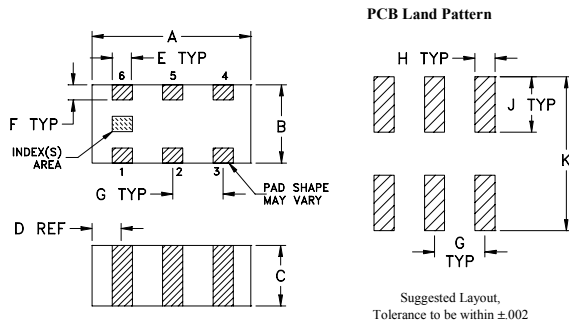


Outline Dimensions (inch)

A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15

G	H	J	K	wt
.020	.010	.022	.053	grams
0.51	0.25	0.56	1.35	0.005

Demo Board MCL P/N: TB-912+ Suggested PCB Layout (PL-574)

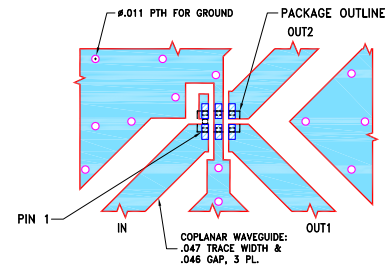





NOTES:

1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS R043508 WITH DIELECTRIC THICKNESS .020±.0015, COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Typical Performance Data⁴

Frequency (MHz)	Insertion Loss (dB)	Input R. Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (Deg.)
3300	0.86	1.38	0.17	0.06
3200	0.88	1.39	0.09	0.57
3300	0.86	1.38	0.17	0.06
3400	0.87	1.39	0.23	0.66
3500	0.87	1.41	0.27	1.39
3600	0.89	1.43	0.29	2.29
3700	0.91	1.46	0.29	3.21
3800	0.93	1.47	0.27	4.33
3900	0.94	1.48	0.24	5.61

4. Measured with Agilent N5242A network analyzer using impedance conversion and port extension.

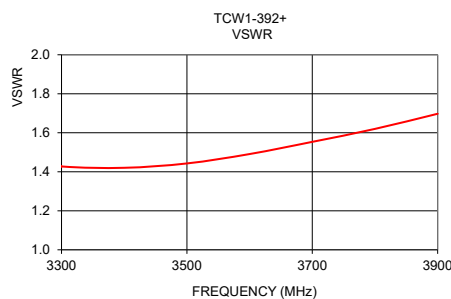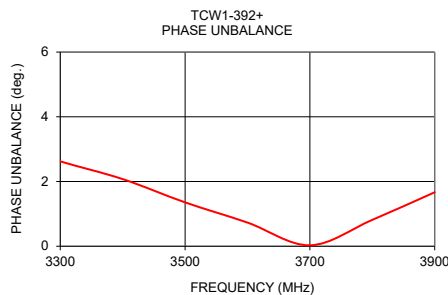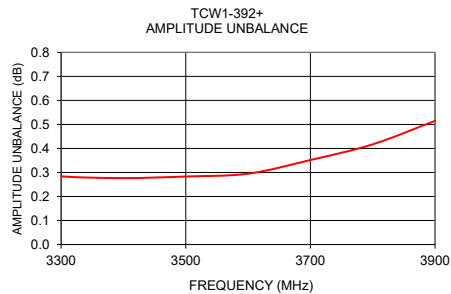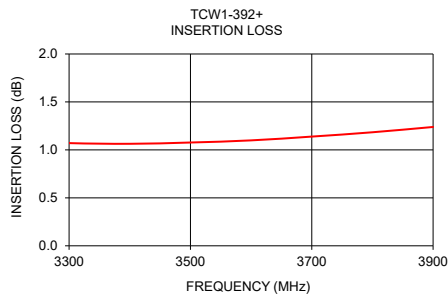

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[TCW2-392+](#)