



(LTCC) COAXIAL

High Pass Filter

VHFG-1230+

50Ω 1400 to 8000 MHz SMA Male/Female

KEY FEATURES

- Low Insertion Loss, 0.7 dB Typ.
- Return Loss, 12 dB Typ.
- Stop Band Rejection, 44 dB Typ.
- Rugged unibody construction.
- Power Handling: 2.5 Watts

APPLICATIONS

- Test and Measurement Equipment
- Communications, Radar, EW, and ECM Defense Systems
- 5G MIMO and Back Haul Radio Systems
- 5G Sub 6 GHz
- WiFi 6E


PRODUCT OVERVIEW

VHFG-1230+ is a 50ohm high pass filter built in rugged unibody construction. Covering 1400-8000 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VHFG-1230+ offer low insertion loss, and excellent power handling capability. It handles up to 2.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

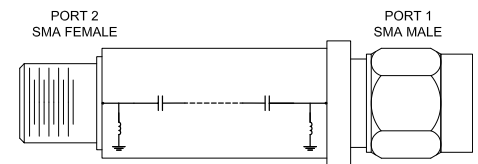

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Pass Band	Insertion Loss	F3-F4	1400 - 2100	—	1.4	—	dB
		F4-F5	2100 - 6500	—	0.7	1.8	
		F5-F6	6500 - 8000	—	0.9	2.1	
Stop Band	Return Loss	F3-F6	1400 - 8000	—	12	—	dB
		F3-F6	1400 - 8000	—	12	—	
	Rejection	DC-F1	DC - 850	38	44	—	dB
Stop Band	Rejection	F1-F2	850 - 1000	20	32	—	
		F1-F2	850 - 1000	20	32	—	
Stop Band	Freq. Cut-Off ³	Fc ³	1230	—	3	—	dB
		Fc ³	1230	—	3	—	

1. This filter is bi-directional, RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

2. This component should not be used as a DC-block. In applications where DC voltage and/or current is present at either the input or output ports, external DC blocking capacitors are required.

3. Typical variation $\pm 5\%$


ABSOLUTE MAXIMUM RATINGS⁴

Parameter	Ratings
Operating Temperature	-55 °C to +125 °C
Storage Temperature	-55 °C to +125 °C
Input Power ⁵	2.5 W @25°C

4. Permanent damage may occur if any of these limits are exceeded.

5. Power rating applies only to signals within the passband. Power rating above +25°C operating temperature decreases linearly to 0.6W at +125°C.

TYPICAL FREQUENCY RESPONSE

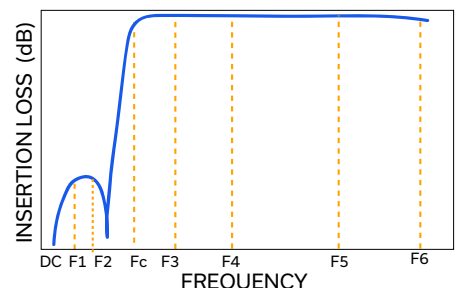



(LTCC) COAXIAL





High Pass Filter

VHFG-1230+

Mini-Circuits

50Ω 1400 to 8000 MHz SMA Male/Female

TYPICAL PERFORMANCE GRAPHS

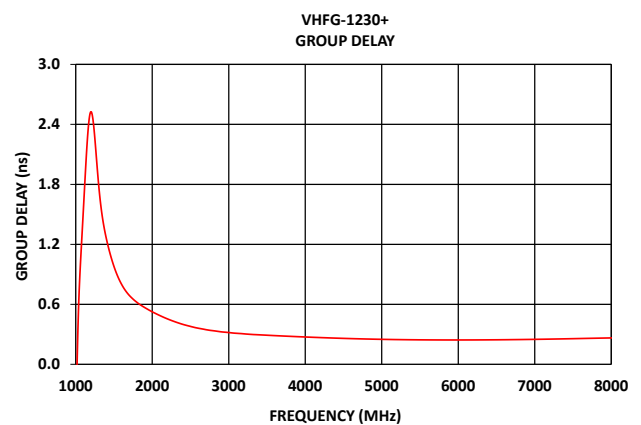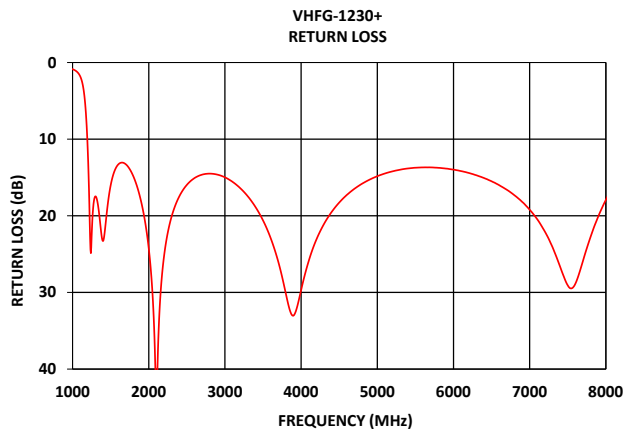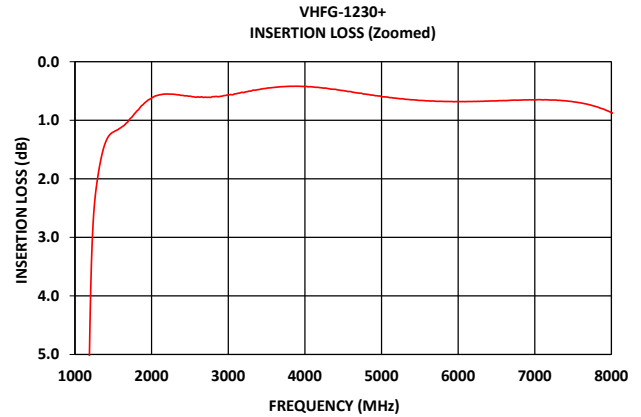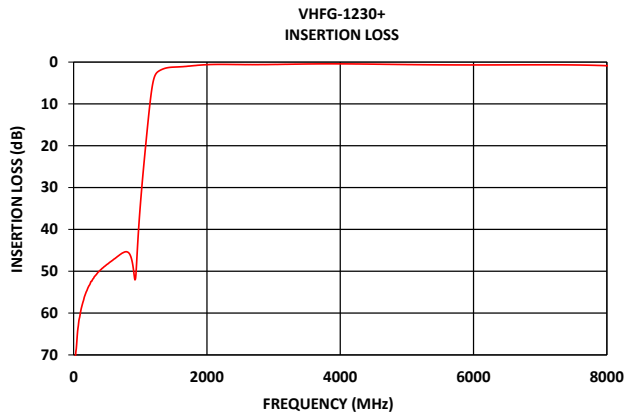



High Pass Filter


VHFG-1230+

50Ω 1400 to 8000 MHz SMA Male/Female

CONNECTOR DESCRIPTION

Function	Functionality	Connector
RF1 ¹	Port-1	SMA MALE
RF2 ¹	Port-2	SMA FEMALE

CASE STYLE DRAWING

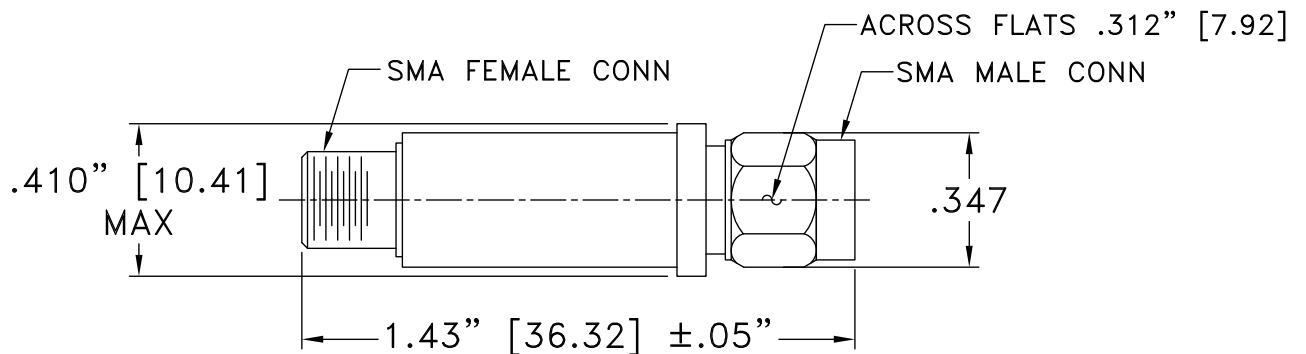

Unit weight: 10.0grams

Dimensions are in inches (mm). Tolerances: 2 Pl. ± 0.04 "; 3 Pl. ± 0.30 "

PRODUCT MARKING*: VHFG-1230+

*Marking may contain other features or characters for internal lot control.



Mini-Circuits

(LTCC) COAXIAL

High Pass Filter

VHFG-1230+

50Ω 1400 to 8000 MHz SMA Male/Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (SXP Files) Data Set (.zip file)
Case Style	FF704
RoHS Status	Compliant
Environmental Ratings	ENV123

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[VHFG-1230+](#)