

Wideband, DC Pass Directional Coupler

ZCDC10-06263-S+

50Ω 10dB Up to 20W 6 to 26.5 GHz

The Big Deal

- Wideband, 6 to 26.5 GHz
- Excellent Coupling Flatness, ± 0.3 dB typ.
- Power Handling up to 20W



CASE STYLE: HT2536-1

Product Overview

The Mini-Circuits ZCDC10-06263-S+ wideband directional coupler offers exceptional performance operating over 6 to 26.5 GHz. This coupler has excellent coupling flatness, good directivity, and power handling. It is ideal for lab testing applications as well as for power monitoring over wide bands, among other applications.

Key Features

Feature	Advantages
Wide bandwidth	With a bandwidth spanning 6 to 26.5 GHz, ZCDC10-06263-S+ coupler is ideal for most lab testing applications, avoiding the need to switch components for different frequency bands.
Excellent Directivity <ul style="list-style-type: none">• 19 dB typ. up to 26.5 GHz	High directivity allows sampling of input powers with minimal detrimental effects due to output mismatches.
Excellent coupling flatness, ± 0.3 dB typ	Excellent coupling flatness over the entire frequency range minimizes the need for compensation circuits in most cases.
Good Return Loss (In & Out) <ul style="list-style-type: none">• 17 dB typ. up to 26.5 GHz	Good return loss over 6 to 40 GHz minimizes undesired reflections and resulting amplitude ripple.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Wideband, DC Pass Directional Coupler

50Ω 10dB Up to 20W 6 to 26.5 GHz

ZCDC10-06263-S+


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Supplied Termination*	1 W
DC Current	0.6A
Permanent damage may occur if any of these limits are exceeded	
* up to 25°C, derates linearly to 325mW at 100°C.	

Coaxial Connections

INPUT	IN
OUTPUT	OUT
COUPLED	CPL
TERMINATION (50Ω) INCLUDED	—


Outline Drawing

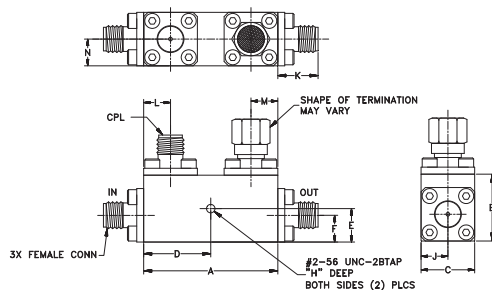

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.25	0.63	0.50	0.63	0.313	0.25	--
31.75	16.0	12.7	15.88	7.95	6.35	--
H	J	K	L	M	N	wt
0.120	0.25	0.43	0.25	0.25	0.25	grams
3.05	6.35	10.92	6.35	6.35	6.35	50

Electrical Schematic



Features

- Wide frequency range, 6 to 26.5 GHz
- Good coupling flatness, ± 0.3 dB typ.
- Good directivity, 19 dB typ. up to 26.5 GHz
- Good return loss (In & Out) 17 dB typ. up to 26.5 GHz
- DC pass input to output

Applications

- Cellular infrastructure
- Military
- Lab use



Generic photo used for illustration purposes only

CASE STYLE: HT2536-1

Connectors	Model
SMA-Female	ZCDC10-06263-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Units
Operating Frequency		6		26.5	GHz
Nominal Coupling	6-26.5		10 \pm 1.5		dB
Coupling Flatness (\pm)	6-26.5		0.3	0.6	dB
Mainline Loss ¹	6-18		0.8	1.2	dB
	18-26.5		1.0	1.4	dB
Directivity	6-18	15.0	29		dB
	18-26.5	13.0	22		dB
Return Loss (In & Out)	6-18	16.0	28		dB
	18-26.5	15.0	23		dB
Return Loss (Coupling)	6-18	17.5	28		dB
	18-26.5	15.5	22		dB
Input Power**				20	W




1. Mainline loss includes coupling loss

** Up to 25°C, derates linearly to 9W at 100°C.

Typical Performance Data

Frequency (MHz)	Mainline Loss ¹ (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB) In	Return Loss (dB) Out	Cpl
1000	0.59	10.84	30.01	30.42	27.93	36.06
2000	0.62	10.92	30.08	26.86	26.71	36.34
4000	0.69	10.54	20.75	28.83	30.23	26.92
6000	0.74	10.34	29.13	26.13	25.23	30.71
8000	0.76	10.38	27.01	35.44	34.17	21.49
10000	0.82	10.19	25.47	31.76	59.22	19.77
14000	0.89	10.04	20.74	22.43	24.26	22.62
18000	0.91	10.12	27.81	24.92	21.88	16.08
22000	0.99	10.02	21.79	18.55	19.17	27.78
26500	0.96	10.38	19.16	23.21	24.90	19.35

1. Mainline loss includes coupling loss

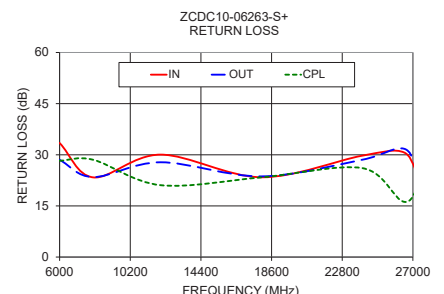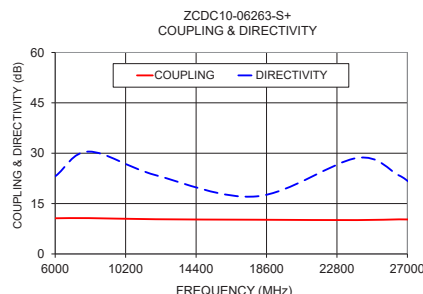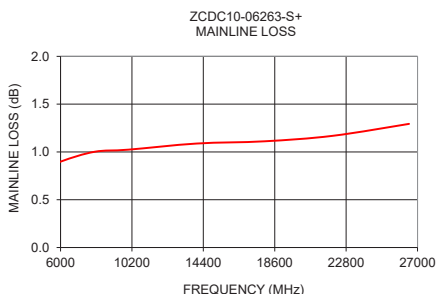

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M173498
ZCDC10-06263-S+
WPE/CP/AM
190920
Page 2 of 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZCDC10-06263-S+](#)