

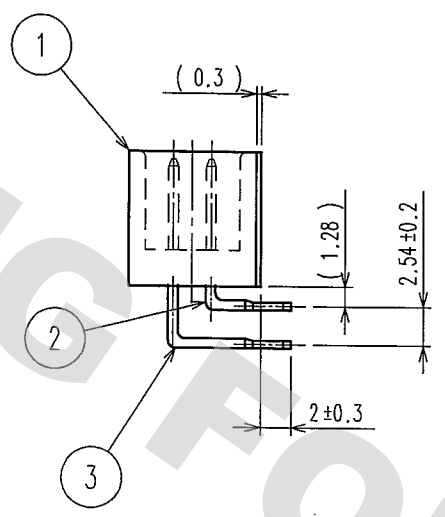
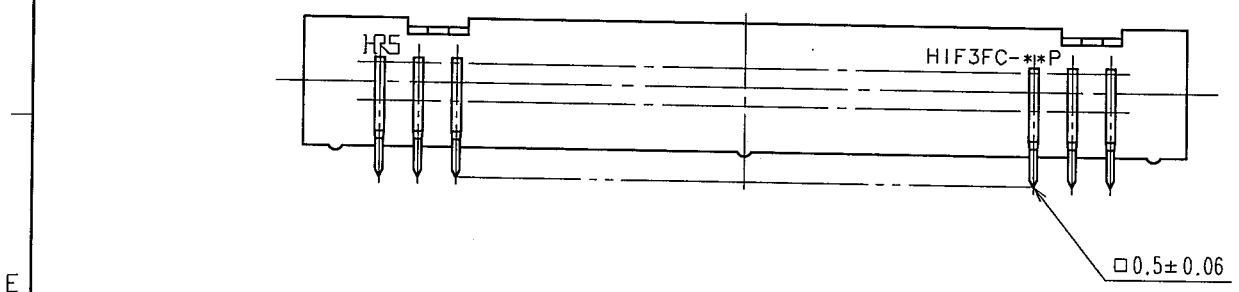
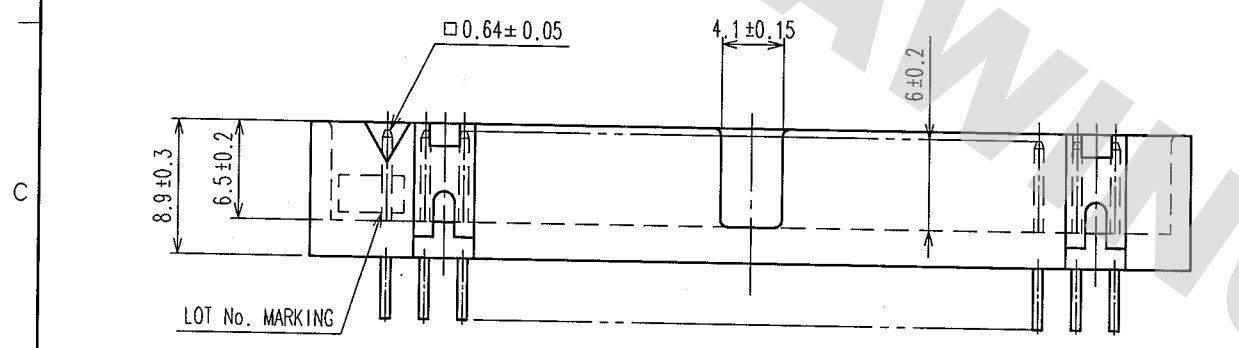


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

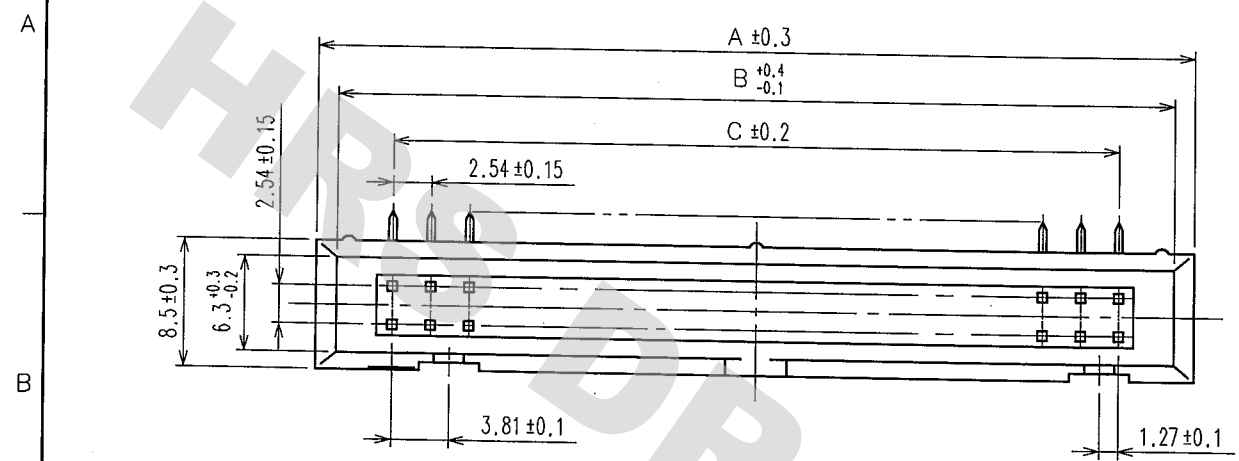

RECOMMENDED PCB HOLE PATTERN

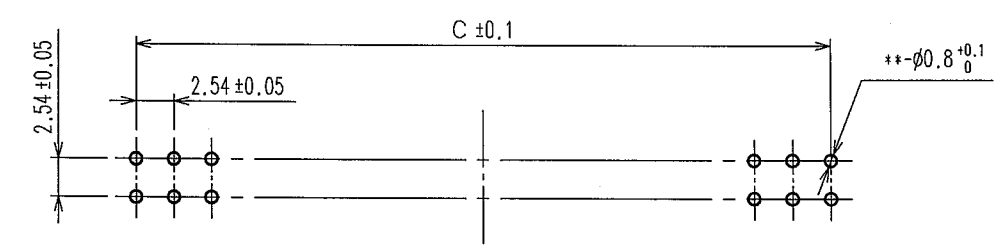

CODE No.	PART No.	1	A	B	C
CL616-0064-8-91	HIF3FC-20PA-2.54DS(91)	20	32.90	30.20	22.86
CL616-0065-0-91	HIF3FC-26PA-2.54DS(91)	26	40.52	37.82	30.48
CL616-0066-3-91	HIF3FC-30PA-2.54DS(91)	30	45.60	42.90	35.56
CL616-0067-6-91	HIF3FC-34PA-2.54DS(91)	34	50.68	47.98	40.64
CL616-0068-9-91	HIF3FC-40PA-2.54DS(91)	40	58.30	55.60	48.26

- NOTE 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
2. ** INDICATES THE NUMBER OF CONTACTS.
3. NUMBER OF CONTACTS.

1	PBT	BLACK (UL94V-0)	2,3	BRASS	CONTACT AREA:GOLD PLATED 0.2μm min. DIP AREA:TIN PLATED 2μm min. UNDER PLATING:NICKEL PLATED 2.5μm min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL		DRAWN T.NODA 04.11.05	DESIGNED H. Doi 04.11.05	CHECKED H. Oyamada 04.11.05	APPROVED H. Okawa 04.11.05	RELEASED	
DRAWING NO. EDC3-151846-22		PART NO. HIF3FC-**PA-2.54DS(91)		CODE NO. CL616			
SCALE FREE UNITS mm		HRS HIROSE ELECTRIC CO., LTD		1/1			

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012
TO
PCK