

Coaxial Power Splitter/Combiner

ZFSC-3-4+

3 Way-0° 50Ω 1 to 1000 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3

Outline Drawing

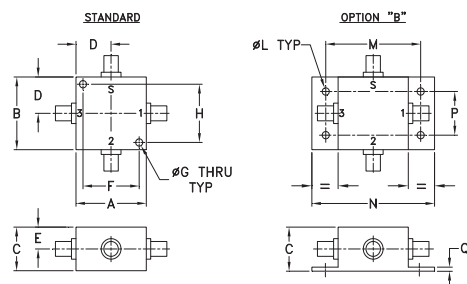

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	wt
1.25	1.25	.75	.63	.38	1.000	.125	1.000	--	--	.125	1.688	2.18	.75	.07	grams
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40	--	--	3.18	42.88	55.37	19.05	1.78	75.0

For option B with N-Type connectors, dimension "C" increases to 0.94 inches.

Features

- very wideband, 1 to 1000 MHz
- low insertion loss, 0.7 dB typ.
- rugged shielded case

Applications

- cellular
- instrumentation
- communication system



Generic photo used for illustration purposes only

CASE STYLE: J17

Connectors	Model
BNC	ZFSC-3-4+
SMA	ZFSC-3-4-S+
N-TYPE	ZFSC-3-4-N+
BRACKET (OPTION "B")	

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
f_L - f_U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
1-1000	35	20	20	18	20	17	0.2	0.5	0.7	1.4	1.0	2.0	3.0	6.0	10	0.2	0.4	0.9

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
1.00	5.10	5.09	5.10	0.01	33.57	32.78	33.29	0.07	1.20	1.18	1.18	1.18
4.20	5.02	5.02	5.02	0.00	32.41	32.18	32.26	0.06	1.15	1.13	1.13	1.13
7.00	5.00	5.01	5.01	0.01	32.31	32.19	32.24	0.06	1.14	1.13	1.13	1.13
10.00	5.01	5.02	5.01	0.01	32.25	32.20	32.23	0.08	1.14	1.13	1.13	1.13
127.00	5.16	5.17	5.16	0.01	28.28	28.76	28.53	0.18	1.22	1.16	1.16	1.16
244.00	5.27	5.23	5.24	0.04	24.51	25.17	24.87	0.59	1.36	1.21	1.21	1.21
361.00	5.47	5.44	5.43	0.04	22.37	23.12	22.78	0.36	1.48	1.27	1.27	1.27
440.00	5.51	5.41	5.45	0.11	21.40	22.18	21.86	0.43	1.54	1.30	1.30	1.30
500.00	5.62	5.48	5.54	0.15	21.02	21.83	21.51	0.48	1.57	1.32	1.33	1.32
590.00	5.68	5.53	5.56	0.15	20.99	21.88	21.58	0.43	1.57	1.35	1.36	1.34
710.00	5.60	5.49	5.43	0.17	22.20	23.34	23.02	0.76	1.46	1.37	1.37	1.35
800.00	5.52	5.33	5.31	0.20	24.69	26.47	25.94	1.01	1.30	1.35	1.35	1.33
880.00	5.57	5.36	5.33	0.24	27.31	30.51	28.51	0.98	1.15	1.31	1.30	1.27
960.00	5.86	5.61	5.59	0.28	22.98	24.19	22.90	1.16	1.29	1.24	1.22	1.19
1000.00	6.15	5.82	5.86	0.33	19.85	20.65	19.71	2.67	1.51	1.19	1.16	1.14

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

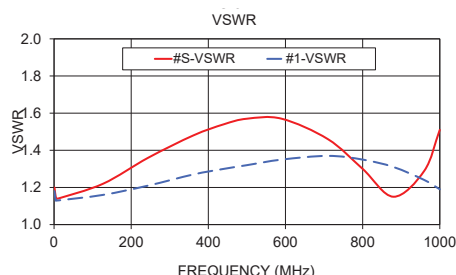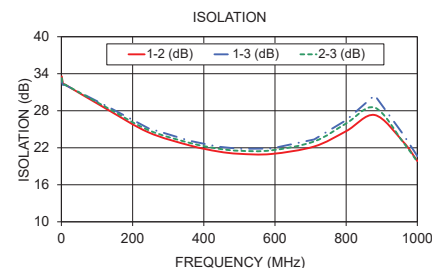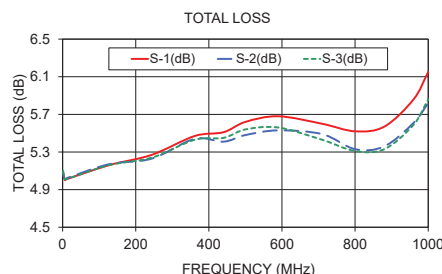

electrical schematic

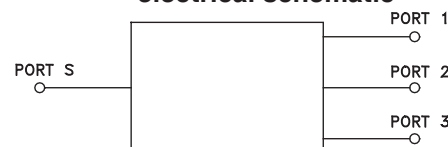

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F
M165879
ZFSC-3-4+
HY/TD/CP/AM
200806

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZFSC-3-4-N+](#) [ZFSC-3-4B-S+](#)