

# High Power, DC Pass Power Splitter/Combiner

## ZN2PD2-14W-S+

2 Way-0° 50Ω Up to 35W 500 to 10500 MHz

### The Big Deal

- Wideband, 500 to 10500 MHz
- High power, up to 35W as a splitter
- Low insertion loss, 1.0 dB
- Low unbalance, 0.1 dB, 2°
- High isolation, 20 dB
- Excellent VSWR, 1.15:1 typ.



CASE STYLE: VVV845

### Product Overview

Mini-Circuits' ZN2PD2-14W-S+ is a 2-way 0° high-power splitter/combiner providing up to 35W power handling as a splitter (1.0W as a combiner) and low insertion loss across the entire 500 to 10500 MHz frequency range. Its outstanding combination of high power handling and low loss minimize power dissipation and provide excellent signal power transmission from input to output. The ZN2PD2-14W-S+ comes housed in a rugged aluminum alloy case measuring 4.5 x 2.5 x 0.67" with SMA connectors.

### Key Features

Feature	Advantages
Wideband, 500 to 10500 MHz	This model supports bandwidth requirements for a wide variety of applications.
High power handling: <ul style="list-style-type: none"><li>• 35W to 6800 MHz</li><li>• 20W to 9800 MHz</li><li>• 10W to 10500 MHz</li></ul>	The ZN2PD2-14W-S+ is suitable for systems with a wide range of power requirements.
Low insertion loss, 1.0 dB	The combination of 35W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
Low unbalance: <ul style="list-style-type: none"><li>• 0.1 dB amplitude unbalance</li><li>• 2° phase unbalance</li></ul>	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
High isolation, 20 dB	Minimizes interference between ports.
DC Passing, 600mA (300mA each port)	Supports applications where DC power is needed through the RF line.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# High Power, DC Pass Power Splitter/Combiner

## ZN2PD2-14W-S+

2 Way-0° 50Ω 35W 500 to 10500 MHz

### Maximum Ratings

Operating Temperature(@ <35W)	-55°C to 60°C
Operating Temperature(@ <20W)	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	600 mA (300mA for each port)

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

SUMPORT	S
PORT 1	1
PORT 2	2

### Features

- wideband, 500-10500 MHz
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 2 deg. typ.
- up to 35W power input as splitter

### Applications

- UHF TV
- cellular/ISM/SMG/GSM
- GPS/L BAND (MARSAT)
- PCS/DCS/UMTS
- MMDC
- SATCOM
- defense and federal communications
- X band and S band



Generic photo used for illustration purposes only

CASE STYLE: VVV845

Connectors	Model
SMA	ZN2PD2-14W-S+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency		500		10500	MHz
Insertion Loss (above theoretical 3.0 dB)	500-10500 690-9800 850-6800	— — —	1.0 0.9 0.7	1.7 1.5 1.2	dB
Isolation	500-10500 690-9800 850-6800	11 14 20	17 20 24	— — —	dB
Phase Unbalance	500-10500 690-9800 850-6800	— — —	2.5 2 1	6 5 4	Degree
Amplitude Unbalance	500-10500 690-9800 850-6800	— — —	0.15 0.1 0.1	0.5 0.4 0.3	dB
VSWR (Port S)	500-10500 690-9800 850-6800	— — —	1.4 1.2 1.15	1.95 1.60 1.40	:1
VSWR (Port 1-2)	500-10500 690-9800 850-6800	— — —	1.4 1.15 1.10	1.98 1.45 1.35	:1
Power Handling <sup>3</sup>	As Splitter <sup>1</sup>	500-10500 500-9800 500-6800	— — —	10 20 35	W
	As Combiner <sup>2</sup>	200-10500	—	1.0	

1. All outputs must terminate 50 ohm (VSWR 1.5:1 or better)

2. As a combiner of non-coherent signals, max. power per port is 1.0 watt power rating divided by number of ports.

3. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 60°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 10°C/W.


### Outline Drawing

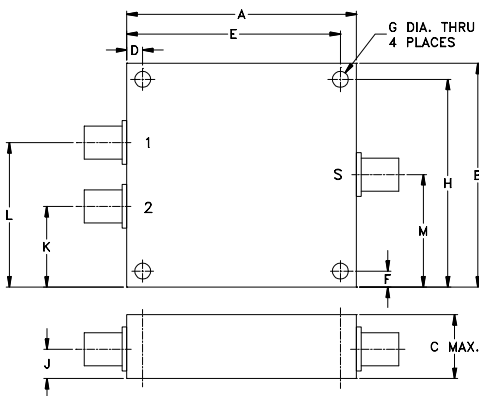

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
4.50	2.50	.67	.400	4.100	.125	.125
114.30	63.50	17.02	10.16	104.14	3.18	3.18
H	J	K	L	M		wt
2.375	.33	.75	1.75	1.25		grams
60.33	8.38	19.05	44.45	31.75		247

### Electrical Schematic



### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)






[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M171494  
ED-16010702  
ZN2PD2-14W-S+  
JC/CP/AM  
221129  
Page 2 of 3

Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
500	3.40	3.40	0.00	12.78	0.00	1.64	1.23	1.23
600	3.34	3.34	0.00	15.01	0.04	1.53	1.17	1.17
690	3.28	3.29	0.00	17.28	0.05	1.44	1.13	1.13
850	3.22	3.22	0.00	22.59	0.11	1.28	1.09	1.09
1000	3.18	3.19	0.00	31.06	0.13	1.15	1.07	1.06
2000	3.26	3.25	0.01	42.35	0.16	1.03	1.02	1.02
3000	3.47	3.47	0.00	32.55	0.23	1.08	1.06	1.09
4000	3.56	3.57	0.01	26.12	0.47	1.01	1.06	1.06
5000	3.82	3.79	0.04	24.38	0.45	1.21	1.04	1.04
6000	3.76	3.79	0.03	26.98	0.29	1.18	1.12	1.10
6800	3.77	3.83	0.06	33.21	0.85	1.20	1.22	1.20
8000	3.83	3.81	0.02	21.51	0.94	1.06	1.18	1.18
9000	3.78	3.88	0.10	21.49	0.76	1.15	1.24	1.27
9800	4.06	4.12	0.06	17.23	1.54	1.26	1.17	1.18
10500	4.32	4.27	0.05	13.99	1.43	1.34	1.53	1.46

1. Total Loss = Insertion Loss + 3dB splitter loss.

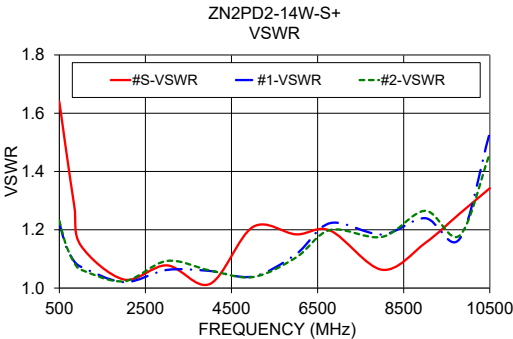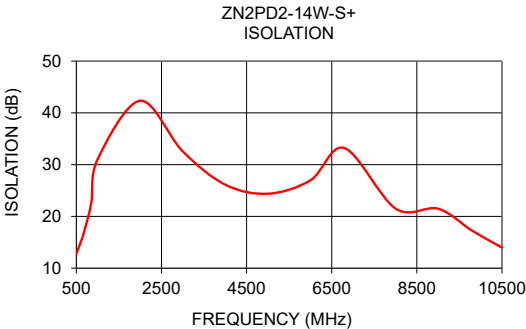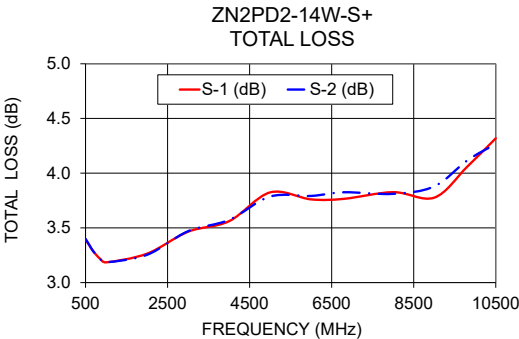

**Notes**  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZN2PD2-14W-S+](#)