




THE BIG DEAL

- Very Low Insertion Loss with Excellent Power Handling
- Fast Roll-Off with Wide Stopband
- Passbands Up to 36 GHz
- Stopband Up to 57 GHz

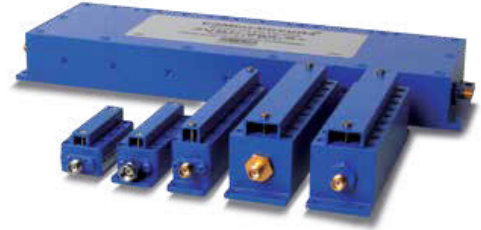

PRODUCT OVERVIEW

Mini-Circuits' coaxial cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 0.5% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front ends. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' coaxial cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical.

KEY FEATURES

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter.
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide spur free band results in better receiver sensitivity
High power handling	Well suited for transmitter application
Protective assembly	Prevents accidental de-tuning of precisely tuned resonant circuit



CAVITY

Bandpass Filter

ZVBP-3R25G-S+

Mini-Circuits

50Ω 3000 to 3500 MHz SMA-Female

FEATURES

- Low Insertion Loss of 0.3dB Typ.
- Good Return Loss of 20dB Typ.
- Good Rejection
- Stopband up to 7800 MHz



Generic photo used for illustration purposes only

Model No.	ZVBP-3R25G-S+
Case Style	YM3241
Connectors	SMA-FEMALE

APPLICATIONS

- Test & Measurement Equipment
- R&D Lab, Production, and OTA Test Systems

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	Fc	—	3250	—	MHz
	Insertion Loss	F1-F2	—	0.3	0.7	dB
	Return Loss	F1-F2	14	19	—	dB
Stop Band, Lower	Rejection	DC-F3	55	61	—	dB
		F3-F4	35	40	—	
		F4-F5	10	16	—	
Stop Band, Upper	Rejection	F6-F7	10	16	—	dB
		F7-F8	25	32	—	
		F8-F9	45	51	—	

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating temperature	-40°C to +85°C
Storage temperature	-55°C to +100°C
RF Power Input	25W at 25°C

Permanent damage may occur if any of these limits are exceeded.
Input and output ports are DC short to ground.

TYPICAL FREQUENCY RESPONSE

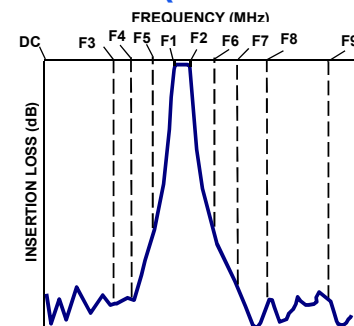

FUNCTIONAL DIAGRAM

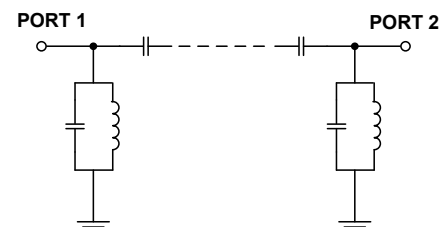

Mini-Circuits



CAVITY


Bandpass Filter

ZVBP-3R25G-S+

COAXIAL CONNECTIONS

PORT 1	SMA-Female
PORT 2	SMA-Female

OUTLINE DRAWING

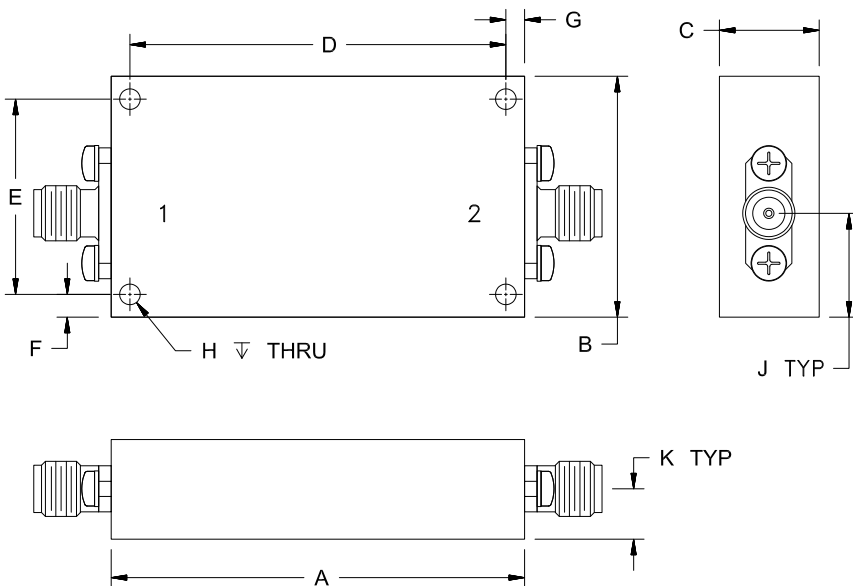OUTLINE DIMENSIONS (Inches)
mm

A	B	C	D	E	F
1.99	1.16	.48	1.810	.940	.11
50.5	29.5	12.2	45.97	23.88	2.8
G	H	J	K		Wt.
.09	.100	.50	.24		grams
2.3	2.54	12.7	6.2		87

Note. Please refer to case style drawing for details









CAVITY

Bandpass Filter

ZVBP-3R25G-S+

TYPICAL PERFORMANCE DATA AT 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	GROUP DELAY (ns)
100	108.18	0.02	3000	2.32
2200	61.73	0.04	3030	2.40
2600	40.54	0.07	3060	2.47
2720	30.84	0.10	3090	2.53
2850	16.34	0.27	3120	2.55
2940	3.12	3.48	3150	2.54
3000	0.23	33.54	3180	2.47
3250	0.19	29.72	3210	2.37
3400	0.20	45.84	3250	2.31
3500	0.27	24.90	3270	2.32
3560	3.15	3.46	3300	2.38
3650	16.03	0.22	3350	2.52
3800	32.20	0.06	3400	2.53
4100	52.01	0.08	3450	2.45
7800	86.06	0.17	3500	2.32

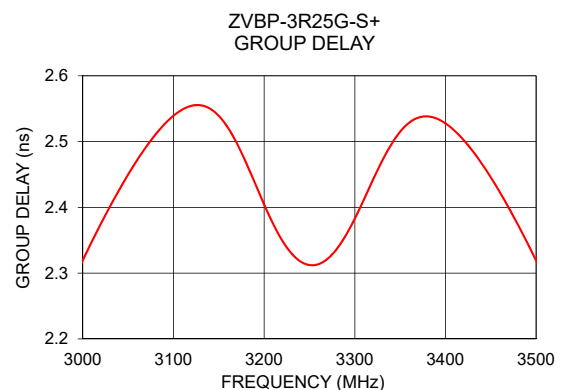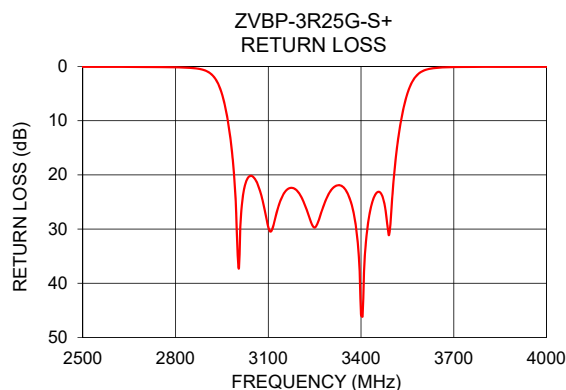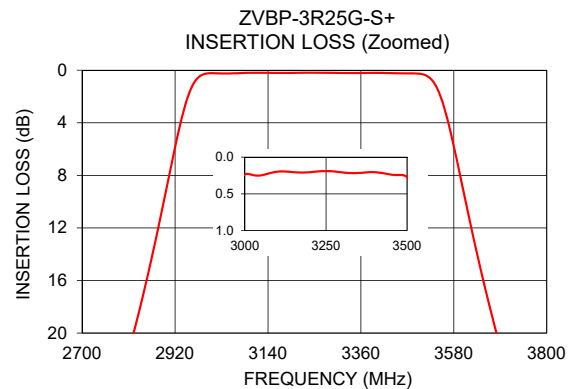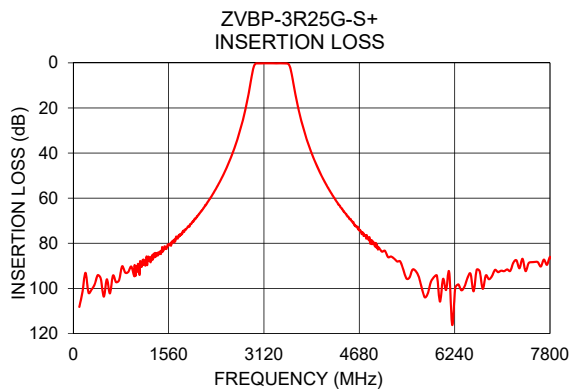

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZVBP-3R25G-S+](#)