


Coaxial Amplifier

ZX60-100VH+

50Ω Medium High Power 0.3 to 100 MHz



The Big Deal

- Miniature Shielded Rugged Case
- Wide frequency range
- Excellent Gain Flatness

Product Overview

This product could be used as a driver amplifier with 1W typical output power. The gain of this amplifier has an excellent flatness over a very wide frequency range. This amplifier has a high dynamic range and therefore can be used as RF front end or IF amplifier.

Feature	Advantages
Frequency range: 0.3-100MHz	Covers HF and partially VHF frequency bands, could be used in FM broadcast up to 110MHz. Great for the radio amateur enthusiasts.
Excellent Gain Flatness: +/- 0.3dB, typ.	Excellent gain flatness minimizes distortion of amplified signals, including multi-tone, complex modulation, very wide frequency range and noise-like signals
Output Power 1W (+30dBm, typ)	High output power in very small package
Noise Figure	Low noise figure, 4dB typ. and high OIP3, +43dBm typ. defines the high dynamic range of the amplifier.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Amplifier

50Ω Medium High Power 0.3 to 100 MHz

Features

- single +12V operation
- wide bandwidth, 0.3 to 100 MHz, usable to 110 MHz
- excellent gain flatness: ± 0.3 dB, typ.
- low noise figure, 4 dB typ.
- output power, up to +30 dBm typ.
- small size

Applications

- buffer amplifier
- driver amplifier
- HF communication
- lab
- instrumentation
- test equipment

Product Description

ZX60-100VH+ is a Class-A, high dynamic range, unconditionally stable amplifier. It features a very small ruggedized case, the ability to withstand accidental open or short at output and reverse bias protection for added reliability under difficult conditions.

Electrical Specifications at 25°C

Parameter	Condition (MHz)	ZX60-100VH+ ▲ ZX60-100VHX+			Units
		Min.	Typ.	Max.	
Frequency Range		0.3	—	100	MHz
Gain	0.3-100	33	36	—	dB
Gain Flatness	0.3-100	—	± 0.3	—	dB
Output Power at 1dB compression	0.3-100	—	+30	—	dBm
Output third order intercept point	0.3-100	—	+43	—	dBm
Noise Figure	10-100	—	4	—	dB
Input VSWR	0.3-100	—	1.6	—	:1
Output VSWR	0.3-100	—	1.5	—	:1
Active Directivity (Isolation-Gain)	0.3-100	—	14	—	dB
DC Supply Voltage		—	12*	—	V
Supply Current		—	320	370	mA

* Recommended Operating Voltage.

▲Heat sink not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 85°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 3.3°C/W max.

Maximum Ratings

Parameter	Ratings
Operating Temperature (base plate)	-40°C to 85°C
Storage Temperature	-55°C to 100°C
DC Voltage	13V
Input RF Power (no damage)	+15 dBm
Power Dissipation	4.4W

Permanent damage may occur if any of these limits are exceeded.

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.


B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

ZX60-100VH+




Model No.	ZX60-100VH+	▲ ZX60-100VHX+
Case Style	MM1750	GA955
Connectors	SMA	


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing for models with heatsink

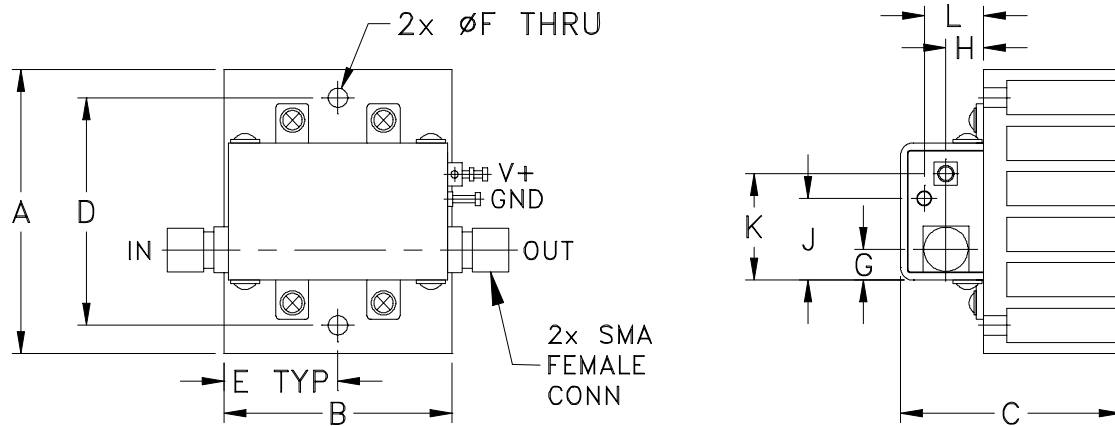

Outline Drawing for models without heatsink

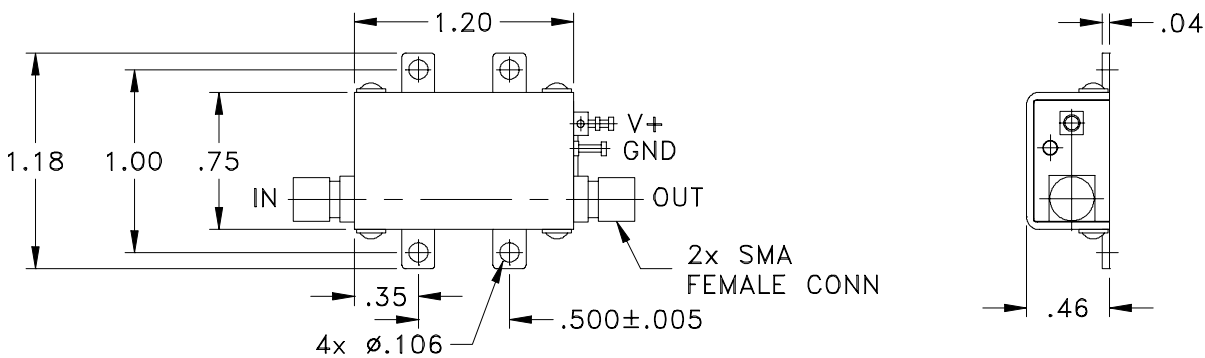

NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminal. See Application Note. [AN-40-010](#).

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	wt*
1.560	1.25	1.21	1.25	0.63	0.106	0.17	0.21	0.45	0.59	0.33	grams
39.62	31.75	30.73	31.75	16.00	2.69	4.32	5.33	11.43	14.99	8.38	61.4







*35.0 grams without heatsink

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR (:1)		POUT at 1 dB COMPR. (dBm)	NOISE FIGURE (dB)	IP3 (dBm)
	12V	12V	IN	OUT	12V	12V	12V
0.30	36.67	19.01	1.14	1.46	29.87	—	40.86
0.50	36.76	19.59	1.15	1.30	30.05	—	42.65
1.00	36.80	18.86	1.16	1.25	30.16	—	44.39
5.00	36.51	18.03	1.28	1.43	30.26	—	44.51
10.00	36.35	16.46	1.45	1.54	30.27	4.14	43.98
15.00	36.40	14.68	1.57	1.56	30.18	4.03	43.65
20.00	36.44	14.52	1.63	1.53	30.11	4.05	43.45
30.00	36.53	13.71	1.66	1.47	29.99	3.98	43.33
40.00	36.61	13.48	1.63	1.39	29.98	3.99	43.23
50.00	36.66	13.42	1.57	1.31	30.04	3.97	43.21
60.00	36.69	13.28	1.49	1.24	29.96	3.89	43.21
70.00	36.69	12.84	1.41	1.18	29.71	3.92	43.11
80.00	36.65	12.98	1.34	1.15	29.34	3.93	42.94
90.00	36.54	13.45	1.27	1.11	28.98	3.95	42.64
100.00	36.36	13.69	1.21	1.06	28.70	3.96	42.38

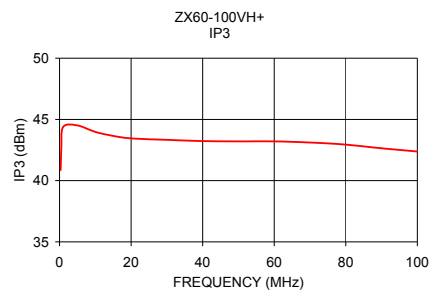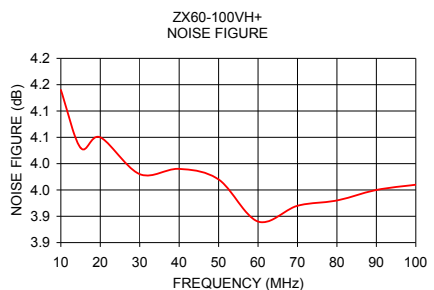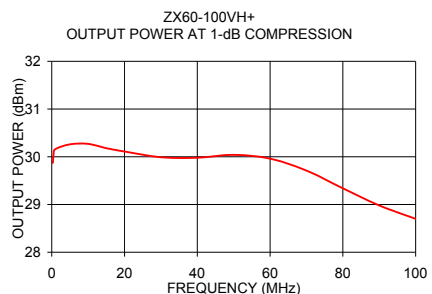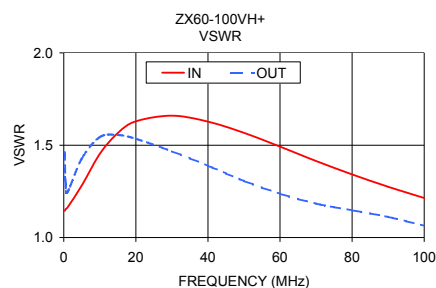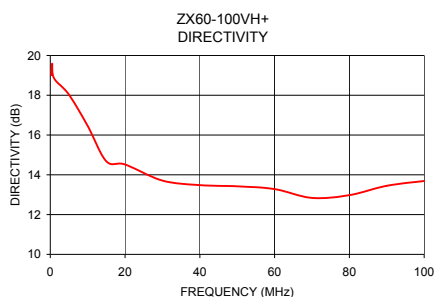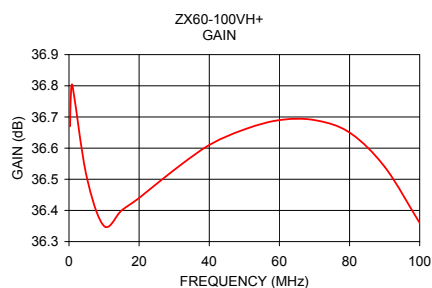

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits:

[ZX60-100VHX+](#) [ZX60-100VH+](#)