



Mini-Circuits

LUMPED LC COAXIAL

Bandpass Filter

ZX75BP-263-S+

50Ω 230 to 297 MHz SMA-Male to SMA-Female

KEY FEATURES

- Insertion Loss, 3dB Max.
- Pass Band Return Loss, 12dB Min.
- Stop Band Rejection, 30dB Typ.

APPLICATIONS

- SATCOM Communication
- Navigation


PRODUCT OVERVIEW

ZX75BP-263-S+ is a 50Ω bandpass filter in a connectorized package covering 230 to 297MHz. This offers good matching within the passband and high rejection in stopband.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM

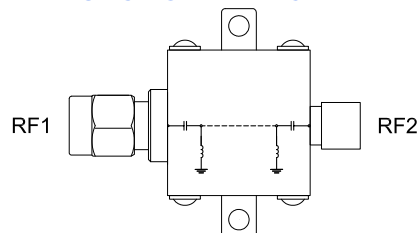

ELECTRICAL SPECIFICATIONS¹ AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	Fc	263.5	—	—	—	MHz
	Insertion Loss	F1-F2	230 - 297	—	—	3	dB
	Return Loss	F1-F2	230 - 297	12	—	—	dB
Stop Band, Lower	Rejection	DC-F3	DC - 80	35	—	—	dB
		F3-F4	80 - 140	20	—	—	
Stop Band, Upper Rejection		F5-F6	360 - 500	20	—	—	dB
		F6-F7	500 - 1000	35	—	—	
		F7-F8	1000 - 4000	—	30	—	
Maximum Deviation from Linear Phase		—	Fc ± 43	—	—	±12	Deg

1. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.


ABSOLUTE MAXIMUM RATINGS²

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ³	0.5W at 25°C

2. Permanent damage may occur if any of these limits are exceeded.

3. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE AT +25°C

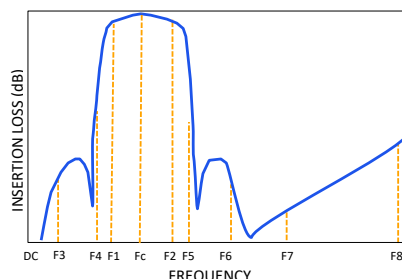

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
ECO-019558
ZX75BP-263-S+
EDU4616
URJ
231012

PAGE 1 OF 4



LUMPED LC COAXIAL






Bandpass Filter

ZX75BP-263-S+

Mini-Circuits

50Ω 230 to 297 MHz SMA-Male to SMA-Female

TYPICAL PERFORMANCE GRAPHS

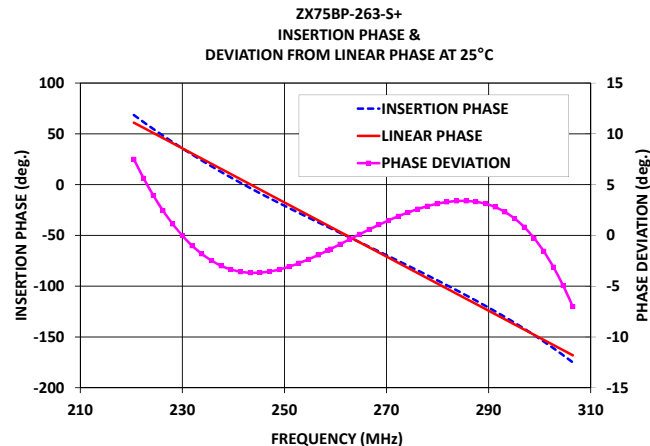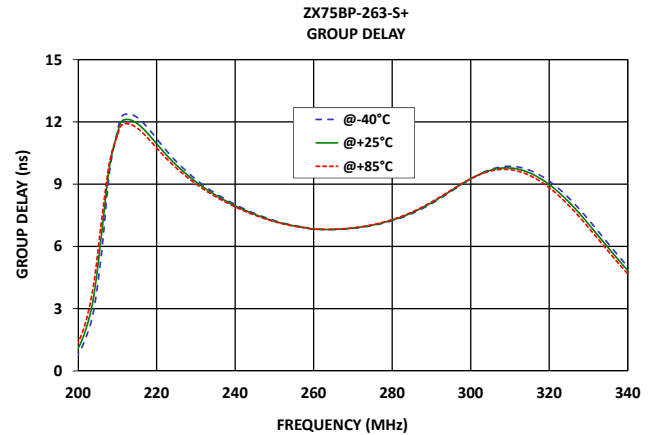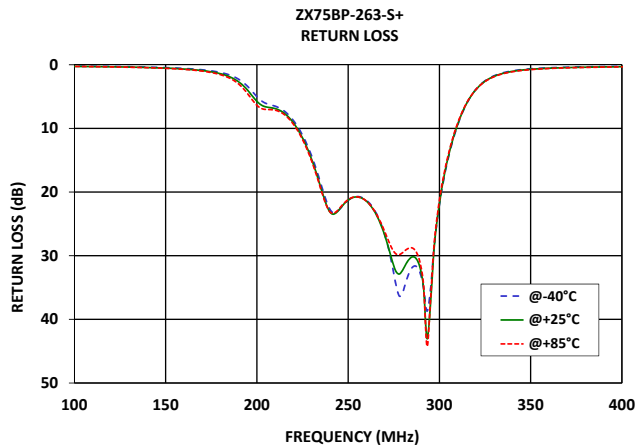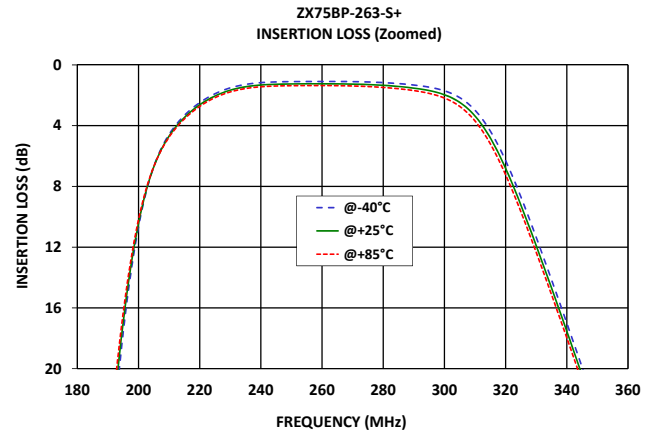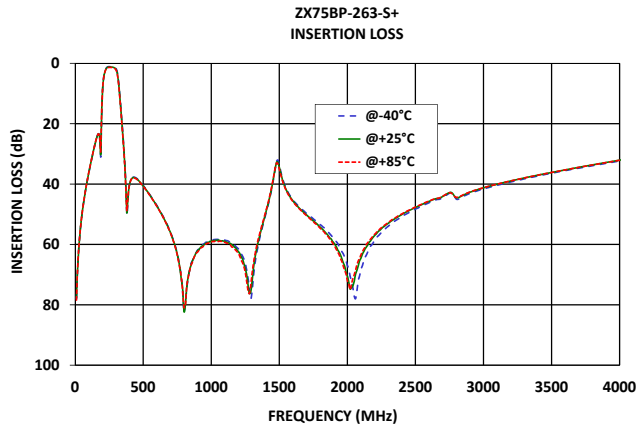

Mini-Circuits



LUMPED LC COAXIAL

Bandpass Filter

ZX75BP-263-S+


Mini-Circuits

50Ω 230 to 297 MHz SMA-Male to SMA-Female

CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1 ¹	1	SMA Male
RF2 ¹	2	SMA Female

CASE STYLE DRAWING

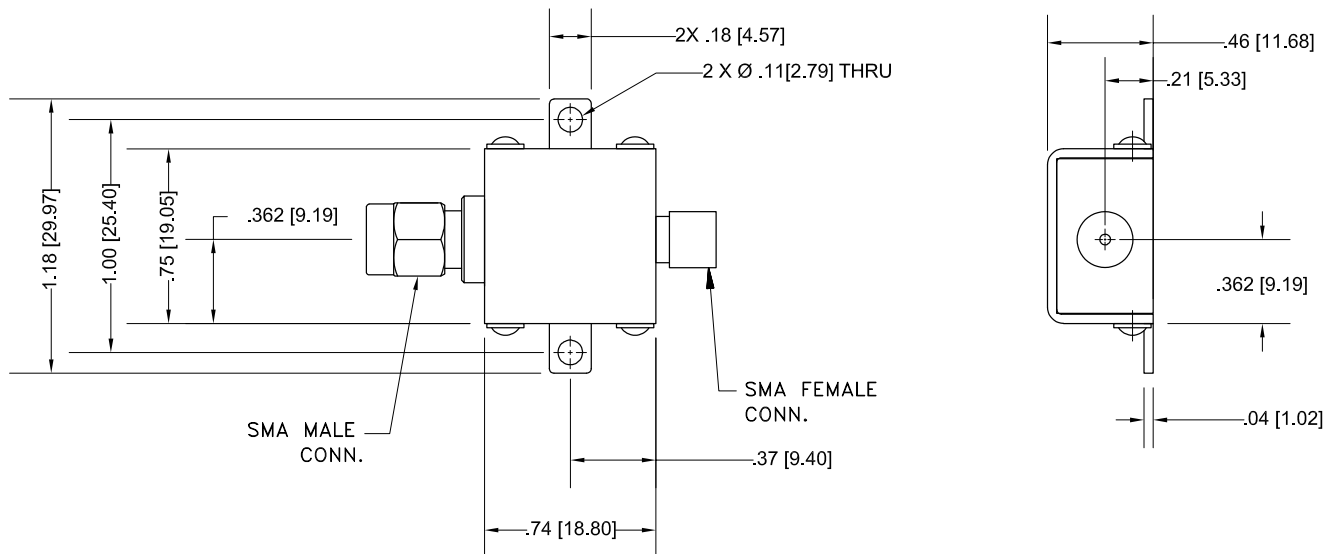

Weight: 24.4 gram

Dimensions are in inches (mm). Tolerances: 2Pl. ± .03; 3Pl. ± .015

Tolerance on hole size and interaxes dimensions to be ± .005.

PRODUCT MARKING*: ZX75BP-263-S+

*Marking may contain other features or characters for internal lot control.





Mini-Circuits

LUMPED LC COAXIAL

Bandpass Filter

ZX75BP-263-S+

50Ω 230 to 297 MHz SMA-Male to SMA-Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	KE1467
RoHS Status	Compliant
Environmental Ratings	ENV46

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZX75BP-263-S+](#)