

Coaxial

# Band Stop Filter

**ZX75BS-160-S+**

50Ω

150.3 to 169.7 MHz

## The Big Deal

- High rejection
- Stopband (150.3 to 169.7 MHz)
- Connectorized package



CASE STYLE: KD1465

## Product Overview

The ZX75BS-160-S+ is a band stop filter built in rugged and compact connectorized package. This filter offers good rejection in stopband. It has repeatable performance across lots and consistent performance across temperature. Useful in instrumentation system for industrial applications.

## Key Features

Feature	Advantages
High rejection	ZX75BS-160-S+ enables the filter to attenuate spurious signals without compromising pass band signal.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups
Application	Can be used in systems to prevent noise and avoid jamming by marine communication, IVHS, paging and other radio systems.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

# Band Stop Filter

50Ω 150.3 to 169.7 MHz

## ZX75BS-160-S+



CASE STYLE: KD1465

Connectors Model  
SMA-MF ZX75BS-160-S+


### Features

- High rejection
- Fast roll-off
- Connectorized package


### Applications

- Marine communication
- Land mobile
- Intelligent vehicle highway system
- Paging infrastructure
- Lab use

### Functional Schematic



### Typical Frequency Response

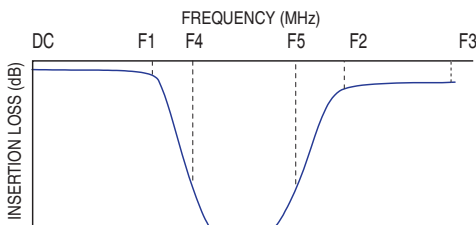

### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band, Lower	Insertion Loss	DC-F1	-	0.6	1.5	dB
	VSWR	DC-F1	-	1.2	1.6	:1
Stop Band	Rejection	F4-F5	150.3 - 169.7	30	45	dB
	VSWR	F4-F5	150.3 - 169.7	-	6.0	:1
Pass Band, Upper	Insertion Loss	F2-F3	230 - 1000	-	0.6	dB
	VSWR	F2-F3	230 - 1000	-	1.4	:1

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	250 mW max.



Permanent damage may occur if any of these limits are exceeded.

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	0.01	1.00
30.0	0.03	1.02
80.0	0.11	1.05
115.0	0.56	1.20
130.0	2.31	1.27
135.0	8.48	3.65
140.0	24.54	8.47
144.0	44.57	11.03
146.0	49.43	11.93
150.3	49.15	12.80
160.0	58.23	16.11
169.7	47.84	15.96
174.0	28.23	13.09
180.0	11.00	5.85
182.0	7.66	4.00
188.0	3.06	1.81
200.0	1.34	1.38
230.0	0.61	1.36
800.0	0.26	1.25
1000.0	0.29	1.30

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

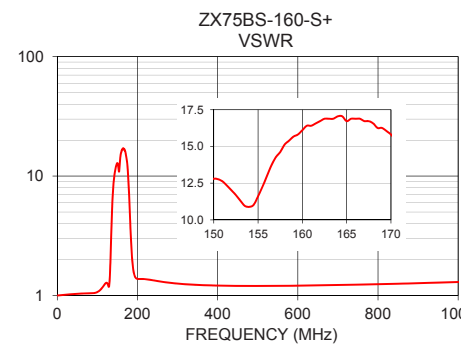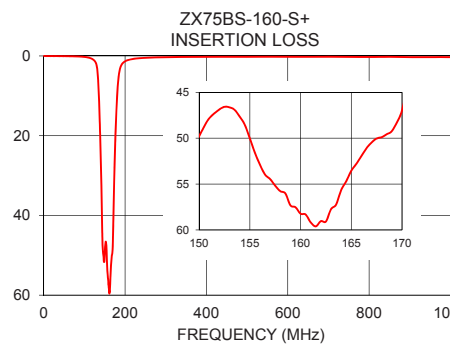

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Coaxial Connections

INPUT	SMA-Male
OUTPUT	SMA-Female

Outline Drawing

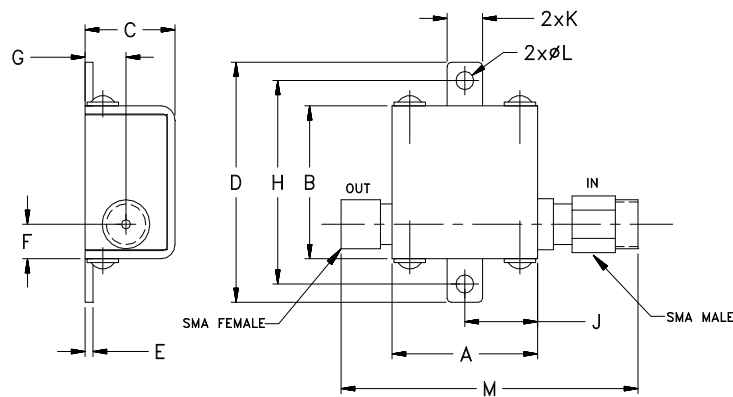

Outline Dimensions (  $\frac{\text{inch}}{\text{mm}}$  )

A	B	C	D	E	F	G
.74	.75	.46	1.18	.04	.17	.21
18.80	19.05	11.68	29.97	1.02	4.32	5.33
H	J	K	L	M	Wt.	
1.00	.37	.18	.09	1.51	grams	
25.40	9.40	4.57	2.29	38.4	21.4	

Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZX75BS-160-S+](#)