

# X2 Frequency Multiplier

## ZXF90-2-153-K+

50Ω      Output 9 to 15 GHz

### The Big Deal

- Ultra-wideband, output from 9 to 15 GHz
- Wide input power range, +16 to +22 dBm
- Low conversion loss, 15 dB
- Good fundamental and harmonic suppression:  
F1, 48 dBc; F3, 42 dBc
- Patented, Reflectionless Filters on Input and Output absorb and terminate out-of-band signals internally.
- Reduced need for external attenuator pads that increase over all conversion loss.



CASE STYLE: UU2776

### Product Overview

Mini-Circuits' ZXF90-2-153-K+ is an ultra-wideband frequency doubler, converting input frequencies from 4.5 to 7.5 GHz into output frequencies from 9 to 15 GHz. Its wide output range makes this model ideal for a wide range of broadband systems including satellite up and down converters, defense radar and communications and more. The multiplier comes housed in a rugged, 2.92mm connectorized housing (0.68 x 0.73 x 0.36"), saving space in crowded layouts.

### Key Features

Feature	Advantages
Broadband, 9 to 15 GHz output	With an output frequency range spanning 9 to 15 GHz, this multiplier supports broadband applications such as defense and instrumentation as well as a wide range of narrowband system requirements.
Low conversion loss, 15 dB typ.	With a low conversion loss, ZXF90-2-153-K+ produces higher output power, reducing the need for amplification.
Excellent fundamental and harmonic suppression: <ul style="list-style-type: none"><li>• F1, 48 dBc</li><li>• F3, 42 dBc</li><li>• F4, 23 dBc</li></ul>	Reduces spurious signals and the need for additional filtering.
Wide input power range, +16 to +22 dBm	Wide input power signal range accommodates different input signal levels while still maintaining a low conversion loss.
2.92mm-F connectorized housing	Ideal for assembled systems and lab use. High frequency connector mates with 2.92mm and SMA connectors.
Small size, 0.68 x 0.73 x 0.36"	Saves space in crowded layouts.

#### Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# X2 Frequency Multiplier

50Ω Output 9 to 15 GHz

## Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Input Power, 25°C	24 dBm

Permanent damage may occur if any of these limits are exceeded.

## Coaxial Connections

INPUT	1
OUTPUT	2

## Outline Drawing

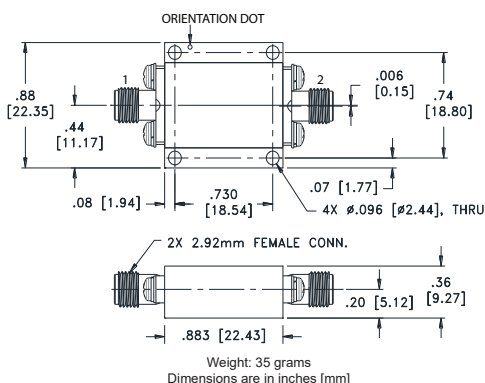

## Features

- broadband
- low conversion loss, 15 dB typ.
- excellent harmonics suppression  
F1, 48 dBc typ F3 42 dBc typ.
- rugged construction

## Applications

- synthesizers
- local oscillators
- satellite up and down converters
- defense radar and communications
- mobile

## Electrical Specifications

Parameter	Min.	Typ.	Max.	Unit
Multiplier Factor		2		
Frequency Range, Input (F1)	4.5	—	7.5	GHz
Frequency Range, Output (F2)	9	—	15	GHz
Input Power	16	—	22	dBm
Conversion Loss	—	15	22	dB
Harmonic Output*, dBc				dBc
F1	—	48	—	
F3	—	42	—	
F4	—	23	—	

\* Harmonics of input frequency below the power level of F2

## Typical Performance Data

Input Frequency (GHz)	INPUT RF= 16 dBm					INPUT RF= 22 dBm			
	Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)			Conversion Loss (dB)	Harmonic Output Below F2 (-dBc)			
		F1	F3	F4		F1	F3	F4	
4500	15.45	64.55	45.66	20.14	17.36	70.97	33.84	21.46	
4600	15.00	60.07	45.58	21.43	16.63	66.38	40.19	22.07	
4700	15.31	56.22	45.01	22.68	16.67	58.72	42.15	23.10	
4800	15.41	53.64	44.21	24.71	16.84	55.17	41.40	24.70	
4900	14.74	52.38	43.80	28.43	16.30	53.16	41.63	27.95	
5000	14.29	51.24	44.01	31.29	15.81	51.87	41.13	30.61	
5100	14.31	50.01	42.97	31.66	15.58	50.82	41.65	30.82	
5200	15.47	48.14	41.30	28.30	16.54	48.86	41.62	27.09	
5300	15.01	48.33	42.31	26.71	15.97	48.67	44.04	24.80	
5400	14.45	48.79	43.12	25.40	15.30	48.95	47.36	22.87	
5600	14.98	48.43	45.69	22.34	15.66	48.02	53.19	20.07	
5800	14.99	49.25	47.65	21.27	15.05	48.93	51.63	20.44	
6000	15.54	49.00	49.63	17.90	14.96	50.44	48.84	21.87	
6200	15.86	49.62	52.37	16.69	15.53	52.19	52.03	19.37	
6400	16.47	51.59	49.07	18.37	16.32	54.88	60.49	19.90	
6600	16.32	55.10	48.93	21.01	15.93	59.54	60.10	22.22	
6800	16.94	59.72	46.56	25.47	16.56	66.45	50.21	24.59	
7000	17.81	52.40	43.84	32.17	16.40	60.54	45.82	26.63	
7200	18.55	44.82	40.23	37.06	17.16	52.37	40.58	27.78	
7400	18.72	39.76	38.51	43.43	17.52	45.43	37.84	35.09	
7500	19.06	37.47	41.62	41.62	17.95	42.30	36.36	34.80	

## Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

# ZXF90-2-153-K+



Generic photo used for illustration purposes only

CASE STYLE: UU2776





Connectors	Model
2.92 mm Female	ZXF90-2-153-K+

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

REV. A  
ECO-003318  
ZXF90-2-153-K+  
ED-18072709/A  
WL/CP/AM  
190812

# ZXF90-2-153-K+

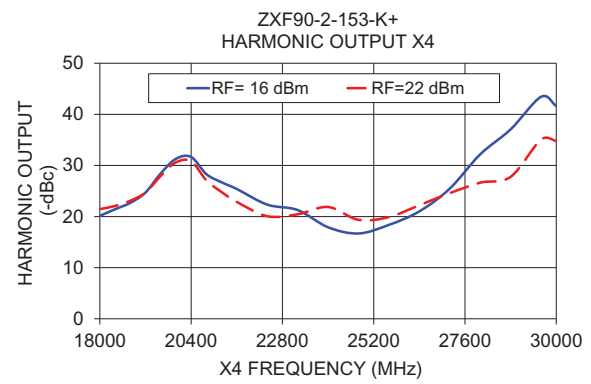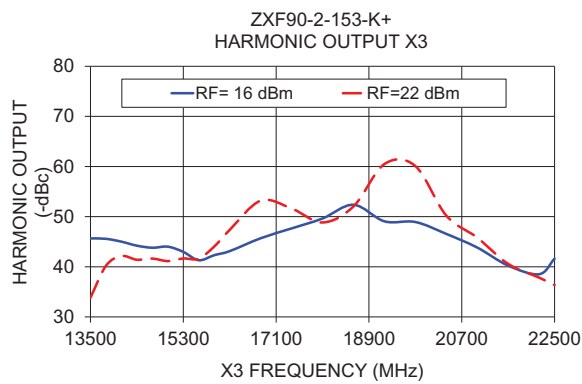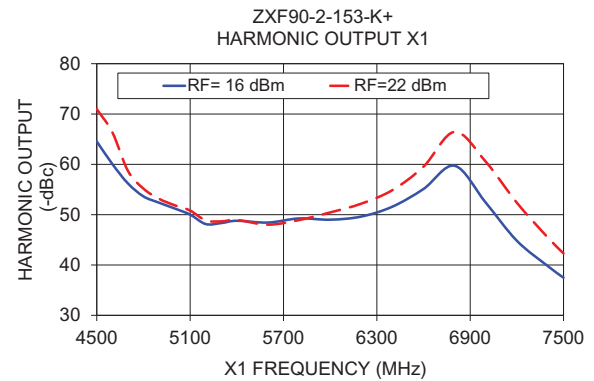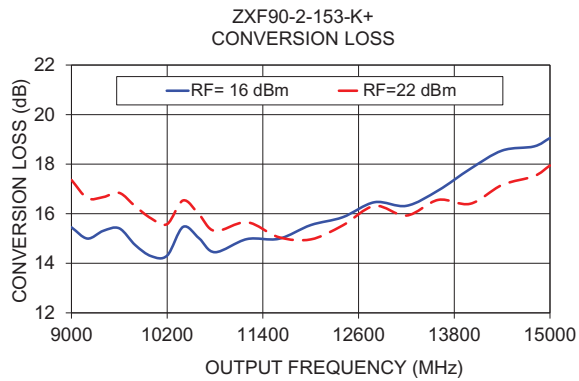

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZXF90-2-153-K+](#)